



# REVEGO

Pocket systems  
for new space concepts

Ordering and planning information

[www.blum.com](http://www.blum.com)

 **blum**<sup>®</sup>



reddot winner 2022



More and more people are merging their kitchen, dining, living and working space. This trend places high demands on modern living concepts. Pocket systems make it possible to quickly, easily and intuitively open up entire spaces when needed, and close them off again when not in use. This gives you totally new design possibilities for varied areas of application.

With the new pocket systems product category, Blum has developed the solution for the optimum use of space – REVEGO is a unique pocket door system with fully integrated technology, all packaged inside a dedicated narrow cabinet: the pocket.



## Contents

- |    |   |
|----|---|
| 06 | Overview of product range                 |
| 10 | Planning approach and product selection   |
| 12 | REVEGO duo, double door                   |
| 22 | REVEGO uno, single door                   |
| 30 | Calculations and assembly of the profiles |
| 34 | moving ideas                              |



### **Efficient manufacturing**

Thanks to the unique full integration of the fittings in the pocket construction, REVEGO already comprises all the necessary components. You can easily pre-assemble pocket systems in your workshop or at your plant, and carefully packaged convey them to end users. This makes installation on site easier and increases efficiency.



### Rapid on-site installation

Final assembly on site is therefore simplicity itself: put up, align and mount the pockets; install the doors and track; make any final adjustments to the gap layout – and that's it! The 3-dimensional adjustment options are easily accessible and intuitive to use. And thanks to the integrated service interface, it is really simple to remove the fittings – even in installed furniture.



### Easy planning

Standardized pocket widths of 100 mm for the single door REVEGO uno and 150 mm for the double door REVEGO duo permit unrestricted design possibilities around the pocket. Single and double door applications can be individually combined.



### The ultimate in convenience

No need for handles thanks to TIP-ON motion technology, users can open cabinet doors with a single touch and slide them away completely into the pocket. To close off the space, the user simply presses the door to release it from the pocket and then presses it again to elegantly conceal the entire area.



## REVEGO at a glance

- Faster and easier installation thanks to pre-assembly of fittings parts
- Full integration of fittings in unique pocket construction
- Easy planning thanks to predefined pocket widths
- Enhanced ease and mesmerising motion
- Individual design possibilities through combination of REVEGO uno (1) and REVEGO duo (2)
- Different nominal lengths allow you to adapt flexibly to the installation situation
- Doors open and close with ease without a handle, thanks to integrated TIP-ON motion technology
- Can be implemented with or without a plinth construction
- Precise and easily accessible 3-dimensional adjustment options
- Full overlay fronts completely conceal the pocket when closed for a perfect gap layout
- Pocket systems can be used in all living areas
- Fittings can be easily disassembled (easy removal even from built-in furniture) thanks to an integrated service interface

## Overview of applications and planning notes

### REVEGO duo

#### Double door, right or left



Page 12

- Number of fronts: 2
- Mounting width: 900 to 1500 mm
- Internal width within the application: up to 1350 mm
- Front width: 442–748 mm

### REVEGO uno

#### Single door, right or left



Page 22

- Number of fronts: 1
- Mounting width: 450 to 900 mm
- Internal width within the application: up to 800 mm
- Front width: 442–898 mm



Watch assembly video:  
[www.blum.com/revmv](http://www.blum.com/revmv)

## Easy product selection

Our Product Configurator facilitates your product selection and provides checked parts lists, planning information and CAD data.



[www.blum.com/revpc](http://www.blum.com/revpc)

# Our services at a glance

Our services support you throughout your entire process – from planning and design all the way through to manufacturing. Take advantage of our tried-and-tested and user-friendly services for your projects with REVEGO.



## Concept, planning and product selection

Our Product Configurator will help you select the right products quickly and efficiently. It gives you checked parts lists and planning information, as well as accurate production drawings.



## Design

You can export REVEGO projects in various CAD formats for use in your own design software. Together with selected partners, we have also established interfaces for the straightforward transfer of data and completion of your project in your design software.



## Ordering

Simply transfer your parts lists from the Product Configurator directly to the web shop of selected distributors. Your REVEGO configurations are easily saved to "My projects", where you can then manage your customer projects.



## Manufacturing

Speed up your production process with our Product Configurator. Transfer the planning results to MINIPRESS top with EASYSTICK (using BXF) or directly to your CNC machine. In order to transfer the data to your CNC machine, you'll receive specially prepared CAM data (CAM DXF or complete WOP drilling programs) in the Product Configurator. This makes production processes on the CNC machine even quicker and easier.





Find out more about our  
E-SERVICES:  
[www.blum.com/configurator](http://www.blum.com/configurator)



Register now free of charge to  
take advantage of E-SERVICES.  
[e-services.blum.com](http://e-services.blum.com)

## Planning approach and product selection

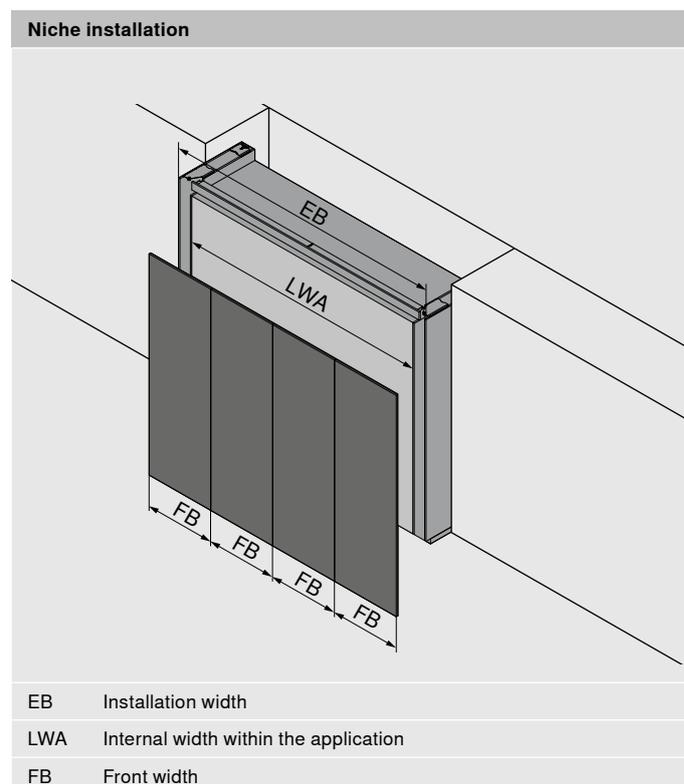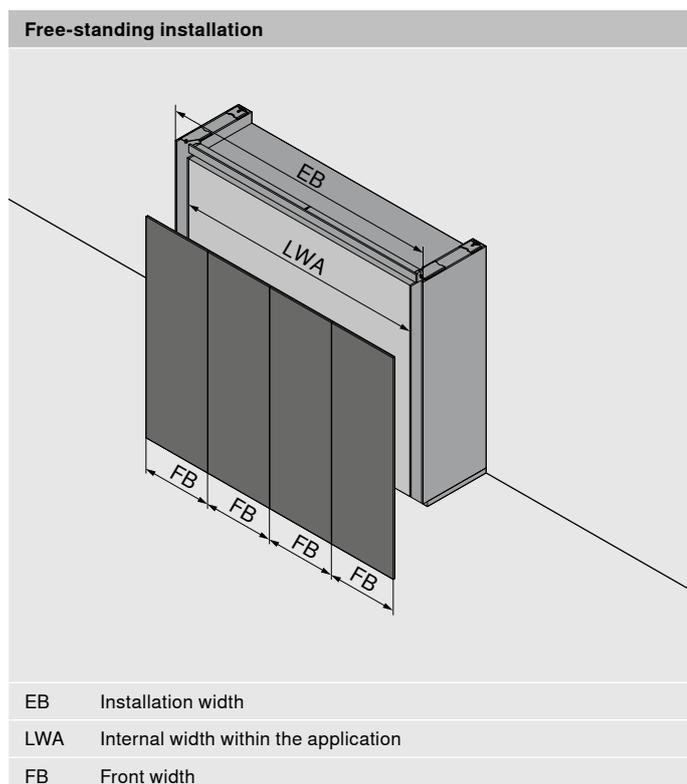

Planning approach starting from the inside moving out with focus on the cabinet width and construction inside the application. The cabinets to be concealed are the decisive factor for the possible number of fronts, front widths and thus for the primary application selection. The installation dimensions and the respective fittings parts are calculated in the next step.


1. What is the cabinet width that needs to be concealed?  
The cabinet width is the internal width within the application.
2. Determine the possible number of fronts and front width based on the internal cabinet width. This will determine the type of application and its mounting width.
3. The pocket dimensions and front protrusion can now be defined on the planning pages of the respective application, and the further fittings selection can be made.

Planning approach from the outside moving inwards with fixed mounting width for the entire application. The available space determines the mounting width and is decisive for the possible number of fronts, front widths and thus for the primary application selection. The respective fittings parts and cabinet dimensions within the application can be calculated in the next step.

1. What niche width is available for the application?  
The niche width is the installation width for the application.
2. Determine the possible number of fronts and front width based on the mounting width. This will determine the type of application.
3. The pocket dimensions, front protrusion and internal dimensions can now be defined on the planning pages of the respective application, and the further fittings selection can be made.

## Planning approach and product selection


### Functional area

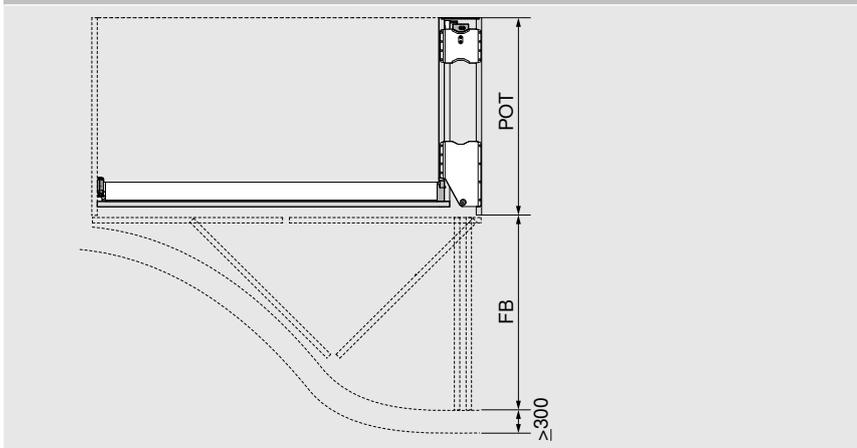

A minimum distance to the nearest element in front of the pocket must be kept free for safety reasons: front width + at least 300 mm

FB	Front width
POT	Pocket depth

### Pocket depth, nominal length, front width and front protrusion

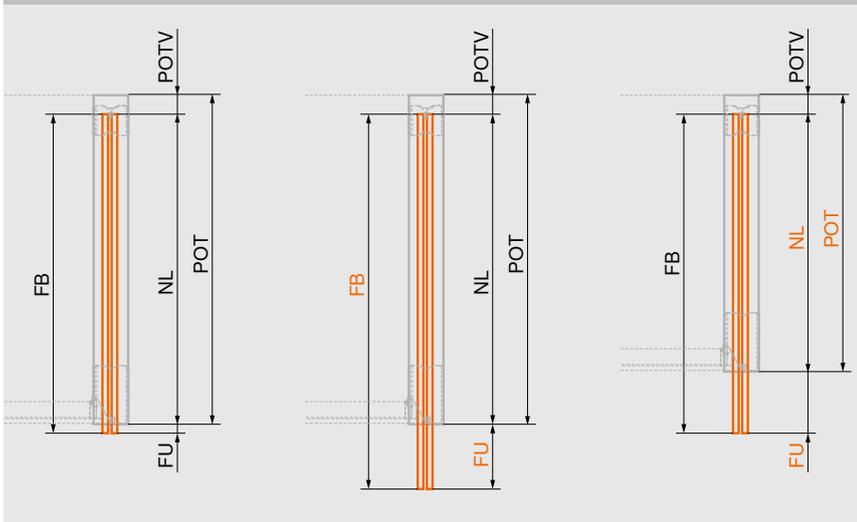

The pocket depth is planned based on the front width and nominal length (pocket profile set). The front protrusion results from the pocket depth, nominal length and front width.

FB	Front width
FU	Front protrusion
NL	Nominal length
POT	Pocket depth
POTV	Pocket depth loss

### Note

- The internal dimensions in the application (width x height x depth) determine the maximum space to be planned for the internal construction.
- Design the widest front first for combined applications.
- Certified durability of 40,000 opening and closing cycles.
- The manual operating force is less than 70 N according to the durability test.
- Drilling patterns, cut-to-size dimensions and detailed parts lists can be found in the Product Configurator.

### Assembly


- You will need a CNC machine to machine the wooden parts. Please note that both horizontal drillings and a track cut-out will be needed.
- We recommend using the drilling template for REVEGO pocket connectors for the horizontal drillings.
- See appendix for calculation and assembly information for cutting profiles to size.



Further safety information can be found at:  
[www.blum.com/revsd](http://www.blum.com/revsd)



Installation position	Double door, right or left (mm)		
	Width	Height	Depth
Installation dimensions	900 – 1500	1820 – 3012	575 – 1000
Internal dimensions within the application	up to 1350	up to 2884	484 – 909
Pocket dimensions	150	1807 – 2999	554 – 979
Front dimensions	442 – 748	1800 – 2980	Thickness 18 – 26
Front weight	35 kg per front max.		

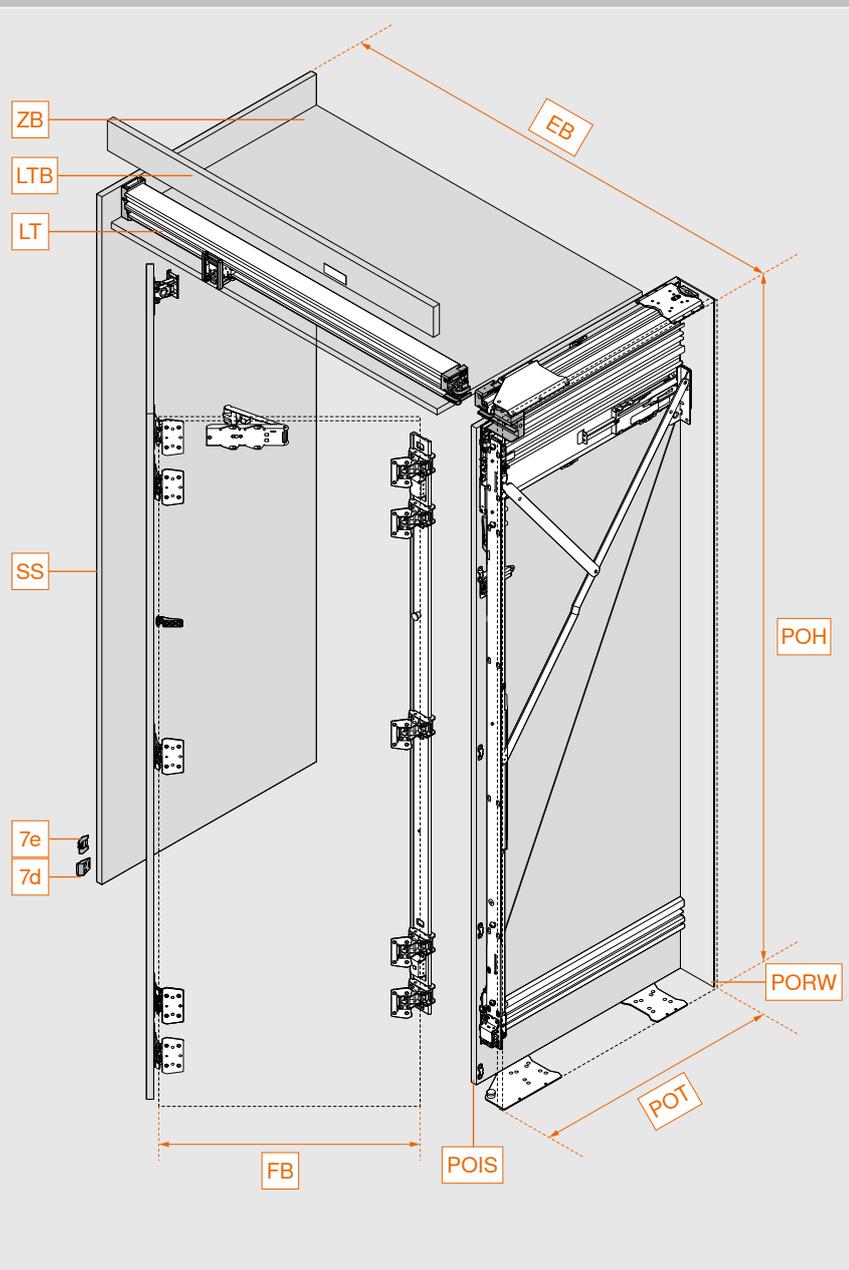**Overview**


EB	Installation width
FB	Front width
LT	Track
LTB	Track cover panel
POH	Pocket height
POIS	Internal pocket side
PORW	Pocket back
POT	Pocket depth
SS	Optional partition side
ZB	Fixed shelf
7d	Door support on partition side
7e	Door support for decor panel/cabinet side



Fittings selection made easy

**Webcode** DQITIM

**Link** [www.blum.com/DQITIM](http://www.blum.com/DQITIM)


It is easy to work out the fittings and drilling positions you need using the Product Configurator. Still not got your login details for our E-SERVICES? Register here to gain free access.


**Product Configurator**  
[www.blum.com/rev2pc](http://www.blum.com/rev2pc)

**Assembly and adjustment**  
[www.blum.com/rev2md](http://www.blum.com/rev2md)

Component overview

Pocket

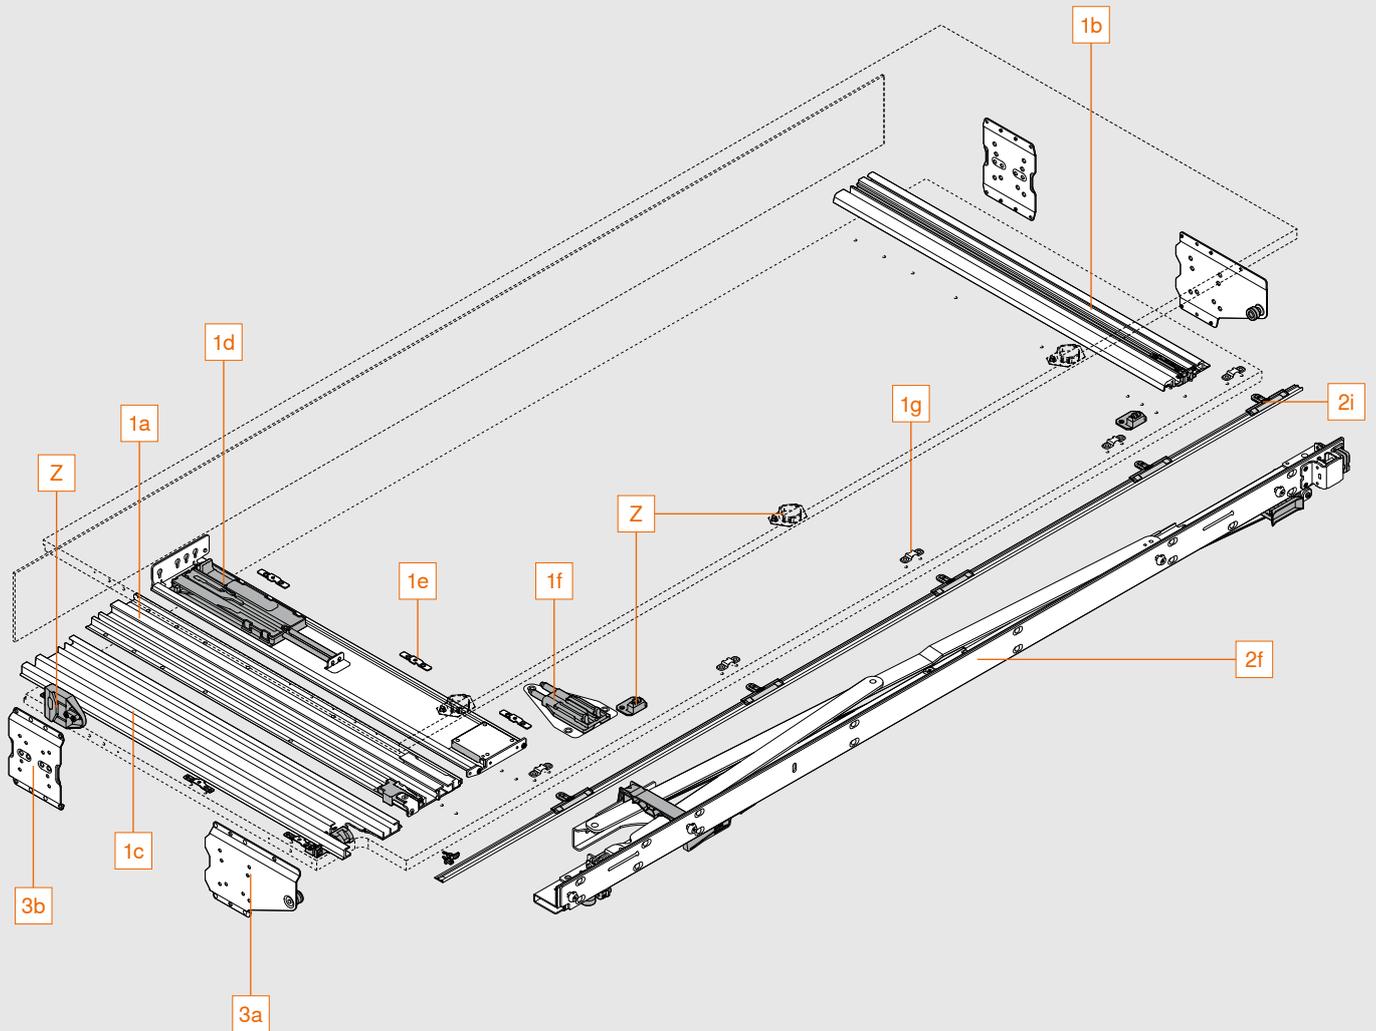


Consisting of:

1a	Top pocket profile
1b	Bottom pocket profile
1c	Roller profile
1d	TIP-ON unit pocket
1e	Fixing clips
1f	BLUMOTION unit pocket
1g	Attachment for pocket cover strip
2f	Hinge bracket
2i	Pocket cover strip incl. mounting
3a	Front pocket connector
3b	Back pocket connector
Z	Adapter for electrical appliance switch-off
Z	Scuff guard

### Component overview

Front

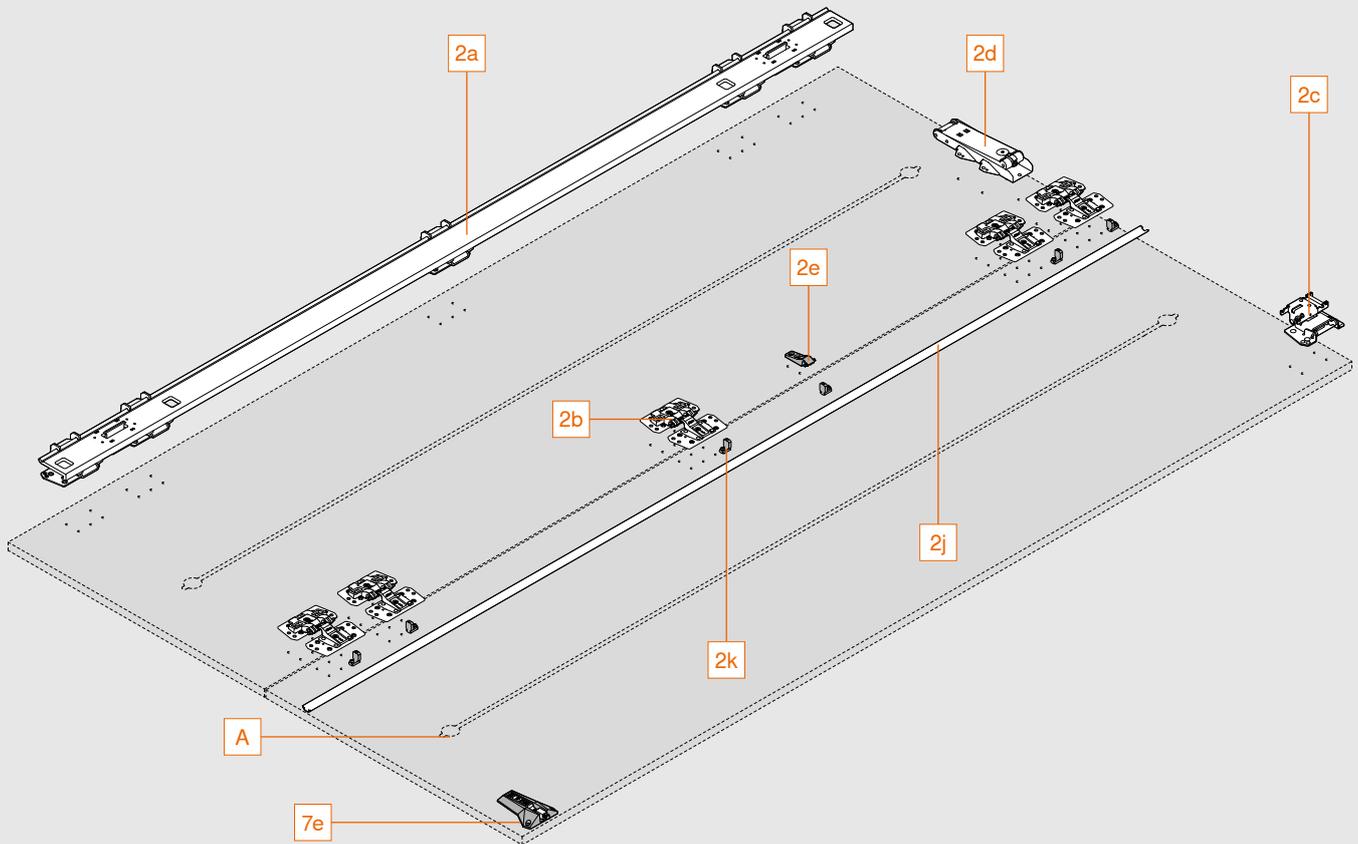


**Consisting of:**

2a	Hinge strip
2b	Double door hinge
2c	Roller carriage hinge
2d	TIP-ON unit door
2e	Support for door cover strip
2j	Door cover strip
2k	Mounting for door cover strip
7e	Door support for decor panel/cabinet side

A We recommend at least one alignment fitting with a maximum installation height of 20 mm per front

Component overview

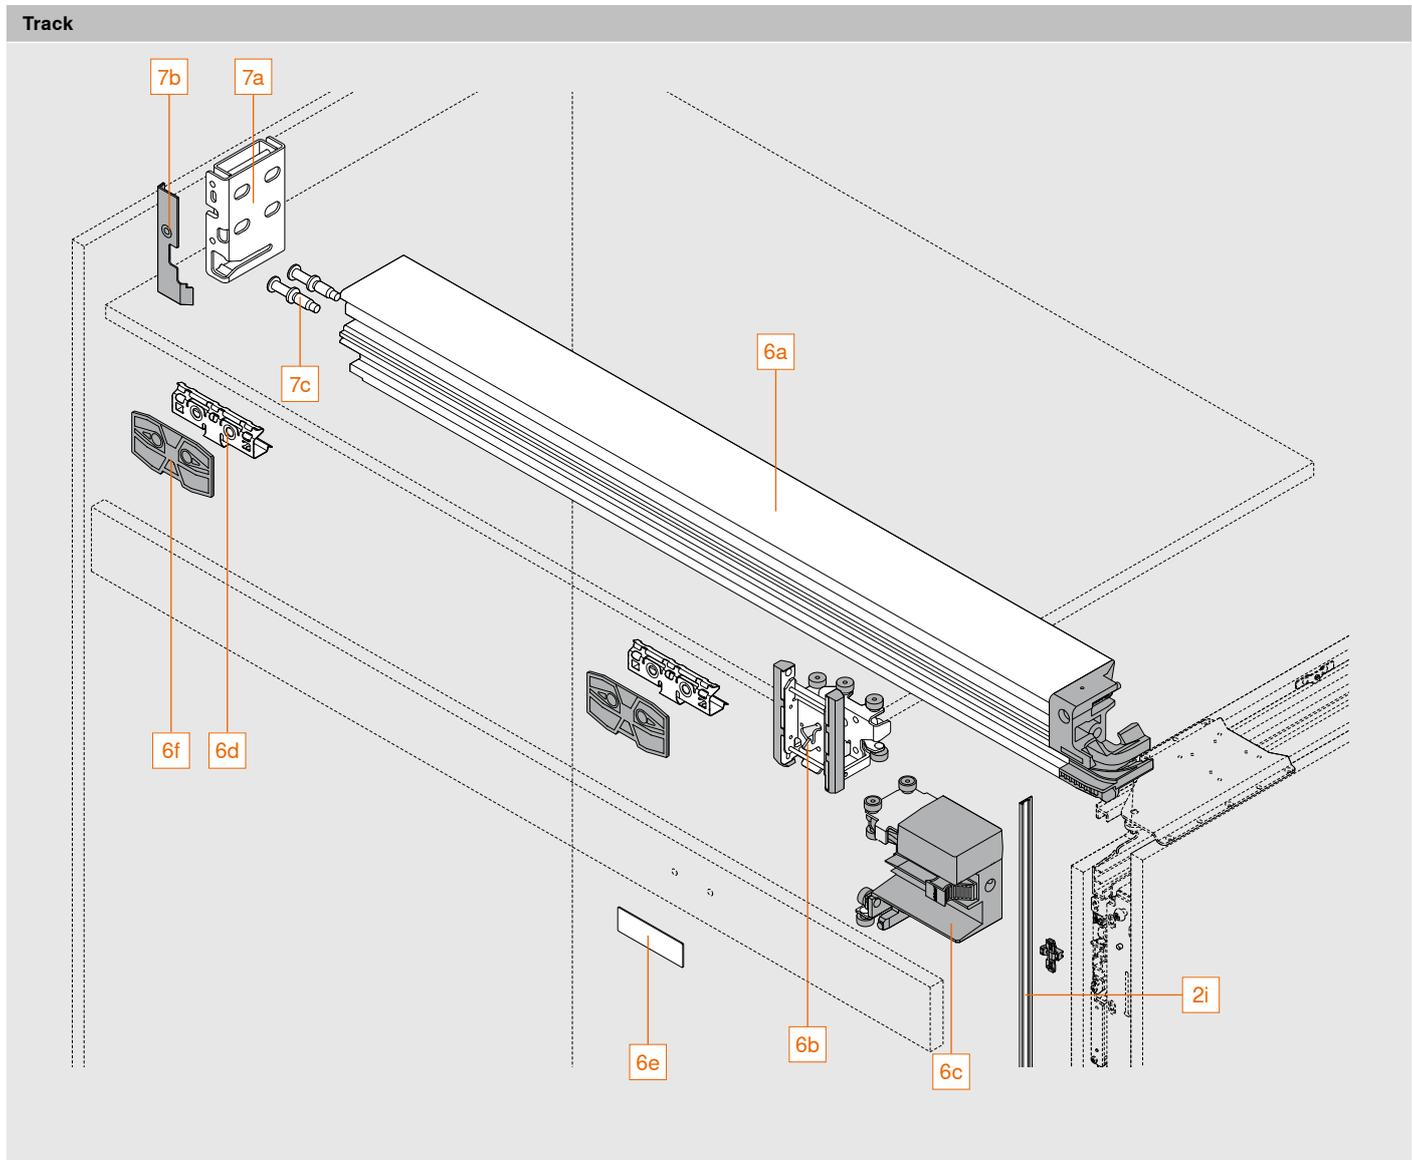

Consisting of:

2i	Pocket cover strip incl. mounting
6a	Track
6b	Roller carriage
6c	Roller carriage transporter
6d	Mounting for track cover panel
6e	Catch plate
6f	Spacer
7a	Track fixing
7b	Cover for track fixing
7c	Pin for track fixing

## Ordering information

1 Pocket profile set with TIP-ON				
Nominal length NL (mm)		Min. pocket depth POT* (mm)	Left	Right
450		550	802P450D.L2	802P450D.R2
525		625	802P525D.L2	802P525D.R2
600		700	802P600D.L2	802P600D.R2
675		775	802P675D.L2	802P675D.R2
750		850	802P750D.L2	802P750D.R2

\* Specification without pocket back. A back construction with a back thickness of at least 4 mm is required.  
Pocket and roller profiles as well as TIP-ON unit pocket can be shortened to an individual nominal length.

### Consisting of:

<b>1a</b>	<b>1 x</b>	Top pocket profile
<b>1b</b>	<b>1 x</b>	Bottom pocket profile
<b>1c</b>	<b>1 x</b>	Roller profile
<b>1d</b>	<b>1 x</b>	TIP-ON unit pocket
<b>1e</b>	<b>6 x</b>	Fixing clips
<b>1f</b>	<b>1 x</b>	BLUMOTION unit pocket
<b>1g</b>	<b>5 x</b>	Attachment for pocket cover strip

2 Hinge bracket set with TIP-ON			
Pocket height (mm)		Left	Right
1807 – 1956		802T1000.L2	802T1000.R2
1957 – 2106		802T2000.L2	802T2000.R2
2107 – 2256		802T3000.L2	802T3000.R2
2257 – 2406		802T4000.L2	802T4000.R2
2407 – 2556		802T5000.L2	802T5000.R2
2557 – 2706*		802T6000.L2	802T6000.R2
2707 – 2856*		802T7000.L2	802T7000.R2
2857 – 2999*		802T8000.L2	802T8000.R2

\* These specified heights are available on request as a special order, contact your Blum representative.

### Note:

Door cover strips must be shortened to a specific length

### Consisting of:

<b>2a</b>	<b>1 x</b>	Hinge strip
<b>2b</b>	<b>5 x</b>	Double door hinge
<b>2c</b>	<b>1 x</b>	Roller carriage hinge
<b>2d</b>	<b>1 x</b>	TIP-ON unit door
<b>2e</b>	<b>1 x</b>	Support for door cover strip
<b>2f</b>	<b>1 x</b>	Hinge bracket
<b>2i</b>	<b>1 x</b>	Pocket cover strip incl. 5 x mountings, black anodized
<b>2j</b>	<b>1 x</b>	Door cover strip, black anodized
<b>2k</b>	<b>6 x</b>	Mounting for door cover strip


## Ordering information

Pocket connector set				
Select pocket connector set 3 or 4 depending on application				
3	Application with plinth			
Pocket side thickness (mm)		Colour		
15 – 17		Black		802V560B
18 – 19		Black		802V580B
Pocket connector top + bottom: POVH 10 mm for 0 – 6 mm gap				
POVH Pocket connector height				
Consisting of:				
3a	2 x	Front pocket connector		
3b	2 x	Back pocket connector		
4	Application without plinth			
Pocket side thickness (mm)		Colour	Left	Right
15 – 17		Black	802V660B.L1	802V660B.R1
18 – 19		Black	802V680B.L1	802V680B.R1
Pocket connector top: POVH 10 mm for 0 – 6 mm gap (POVH 3 mm on request)				
Pocket connector bottom: POVH 3 mm for gap from 7 – 13 mm				
POVH Pocket connector height				
Consisting of:				
4a	2 x	Front pocket connector		
4b	2 x	Back pocket connector		
6	Track set			
LWA double door (mm)		Colour	Left	Right
1050		Black anodized	802L1050DL1	802L1050DR1
1200		Black anodized	802L1200DL1	802L1200DR1
1250		Black anodized	802L1250DL1	802L1250DR1
1350		Black anodized	802L1350DL1	802L1350DR1
LWA Internal width within the application				
Track can be shortened to any length.				
Consisting of:				
6a	1 x	Track		
6b	1 x	Roller carriage		
6c	1 x	Roller carriage transporter		
6d	2 x	Mounting for track cover panels		
6e	1 x	Catch plate, black		
6f	2 x	Spacer		

## Ordering information

<b>7</b>	<b>Assembly set for one double door</b>		
<b>Colour</b>		<b>Left</b>	<b>Right</b>
Black		802M0002.L2	802M0002.R2
Consisting of:			
<b>7a</b>	<b>1 x</b>	Track fixing	
<b>7b</b>	<b>1 x</b>	Cover for track fixing	
<b>7c</b>	<b>2 x</b>	Pin for track fixing	
<b>7d</b>	<b>1 x</b>	Door support on partition side (can be selected depending on installation situation)	
<b>7e</b>	<b>1 x</b>	Door support for decor panel/cabinet side incl. attachment (can be selected depending on installation situation)	
<b>Z</b>	<b>Accessories</b>		
–	<b>Adapter for electrical appliance switch-off</b>		802ZG0CS
Consisting of:			
<b>1 x</b>	Contact switch adapter		
<b>1 x</b>	Ring magnet with catch plate		
<b>1 x</b>	4 countersunk screws M4x12 for contact switch adapter		
<b>1 x</b>	2 round head screws M4x5 for contact switch adapter		
Suitable exclusively for electrical appliance switch-off with magnetic contact (part number 3623011) from Halemeier GmbH ( <a href="http://www.halemeier.de">www.halemeier.de</a> )			
Liability disclaimer: Blum does not accept any liability for the function of the electrical appliance switch-off			
–	<b>Scuff guard</b>		802ZA00S
Consisting of:			
<b>3 x</b>	External pocket side scuff guard		
<b>2 x</b>	Internal pocket side scuff guard		
For front thicknesses starting from 23 mm			
For front thicknesses less than 23 mm, the scuff guard can be used as additional front protection			
–	<b>System screws 6 x 14.5 mm, nickel-plated</b>		661.1450.HG

### Door support on partition side

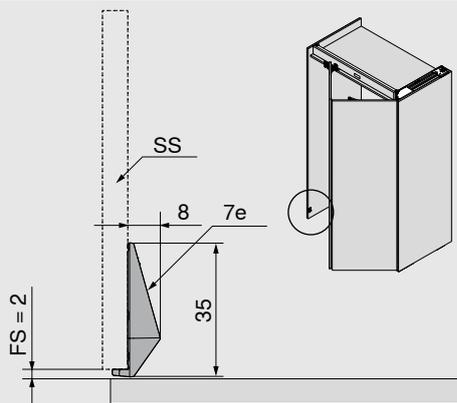


FS	Front gap
SS	Partition side
7e	Door support on partition side

#### Note

- Assembly height of the door support ideally as far down as possible, however up to a maximum height of 1000 mm from the front bottom edge
- Ensure collision-free installation

### Door support for decor panel/cabinet side

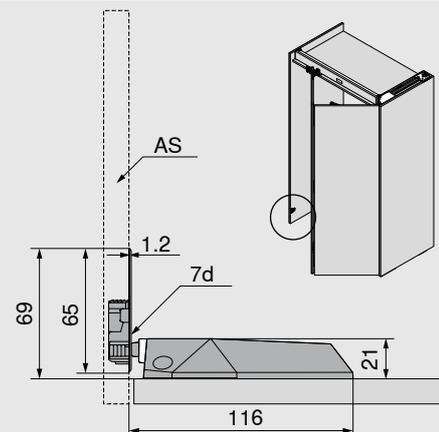


AS	Decor panel/cabinet side
Fu	Bottom gap
7d	Door support for decor panel/cabinet side

#### Note

- Assembly height AS: 64 mm + Fu from the decor panel/cabinet bottom edge
- Assembly height front: 64 mm from the front bottom edge
- Ensure collision-free installation

Planning

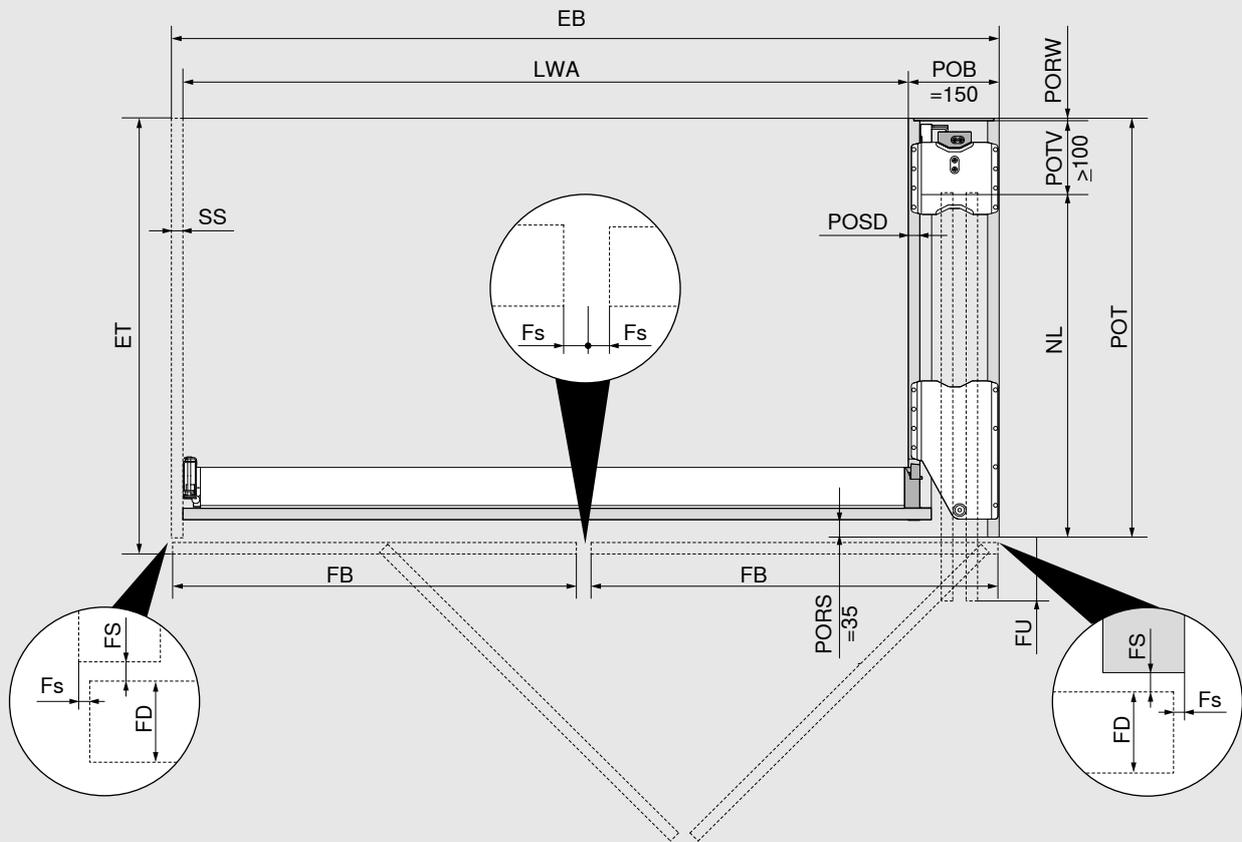

**Mounting width/internal width within the application**

Without partition side:  $EB = LWA + POB$  (150 mm)

With partition side:  $EB = LWA + POB$  (150 mm) + SS

**Front width/front protrusion**

$FB = EB : 2$  (number of fronts) - 2 x  $F_s$  (1.0 - 4.0 mm)

Max.  $NL = FB + 8$  mm

$FU = FB - NL + 15$  mm  
(min.  $FU = 7$  mm)

**Installation depth/pocket depth**

$ET = POT + F_s$  (2 mm) +  $FD$

$FD = 18 - 26$  mm

Min.  $POT = NL + POTV$  ( $\geq 100$  mm) +  $PORW$  ( $\geq 4$  mm), max.  $POT = 979$  mm

$POSD = 15 - 19$  mm

**Note**


- $FU$  is dependent on pocket side thickness, gaps and tolerances.
- To ensure optimum functionality, the fronts are slightly tilted inside the pocket.
- With front thicknesses ( $FD$ ) of more than 23 mm, the side gap ( $F_s$ ), the outside front radius and the inner radius of the external pocket side must be at least 3 mm.
- The internal width within the application determines the maximum width to be planned for the internal construction.

EB	Installation width
ET	Installation depth
$F_s$	Side gap
FB	Front width
FD	Front thickness
FS	Front gap
FU	Front protrusion
LWA	Internal width within the application
NL	Nominal length
POB	Pocket width
POT	Pocket depth
PORS	Pocket back cut
PORW	Pocket back
POSD	Pocket side thickness
POTV	Pocket depth loss
SS	Partition side (optional)

## Planning

### Installation height, front height

#### Application with plinth

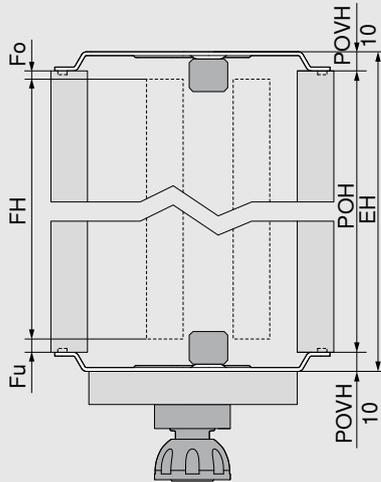

$$FH = POH - Fo - Fu$$

$$EH \leq POH + POVH \text{ top and bottom}$$

$$POH = FH + Fo + Fu$$

POVH 10 mm: gap 0 – 6 mm

#### Note

- Note tilt angle when erecting!
- Minimum distance from the front bottom edge to the floor 10 mm, to the next element above and below 6 mm
- Minimum plinth height 80 mm

EH Installation height

Fo Top gap


Fu Bottom gap

FH Front height

POH Pocket height

POVH Pocket connector height

#### Application without plinth

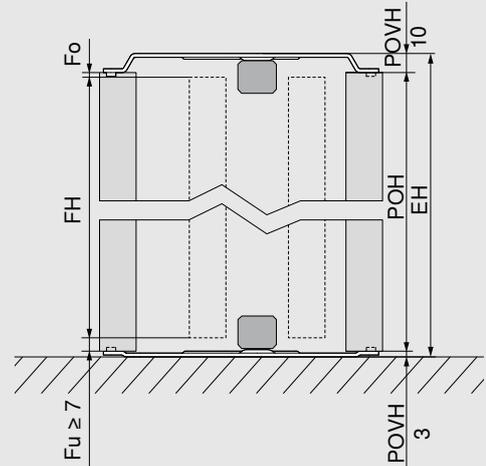

$$FH = POH - Fo - Fu$$

$$EH \leq POH + POVH \text{ top and bottom}$$

$$POH = FH + Fo + Fu$$

POVH top 10 mm: gap 0 – 6 mm

POVH bottom 3 mm: gap from 7 – 13 mm

#### Note

- Note tilt angle when erecting!
- Minimum distance from the front bottom edge to the floor 10 mm, to the next element above and below 6 mm

EH Installation height

Fo Top gap

Fu Bottom gap

FH Front height

POH Pocket height

POVH Pocket connector height

Planning

**Track installation dimension**

LBH = 83 mm

LBD = 15 - 19 mm  
(≤ 17 mm the spacer must be used)

LTF = 17 mm

LA = 100 mm

LV = LA + ZBD (≥ 15 mm)

**Note**

- We recommend using a cross member to stabilize the fixed shelf. Minimum distance to front edge of internal pocket side = 170 mm
- A solid connection between the fixed shelf and the pocket with connector fittings is recommended for an attractive gap layout
- No mounting of add-on parts directly on the track

FD Front thickness

LA Track cut-out

LV Track installation

LBD Track cover panel thickness

LBH Track cover panel height

LTF Track gap

PORS Pocket back cut

ZBD Fixed shelf thickness

**Internal height and internal depth within the application**

LHA = POH - LV

LTA = POT - 70 mm

**Note**

- The internal height/internal depth within the application determines the maximum height/depth to be planned for the internal construction

LHA Internal height within the application

LTA Internal depth within the application

LV Track installation


POH Pocket height

POT Pocket depth



Installation position	Single door, right or left (mm)		
	Width	Height	Depth
Installation dimensions	450 – 900	1820 – 3012	575 – 1000
Internal dimensions within the application	up to 800	up to 2999	519 – 944
Pocket dimensions	100	1807 – 2999	554 – 979
Front dimensions	442 – 898	1800 – 2980	Thickness 18 – 26
Front weight	35 kg per front max.		

**Overview**

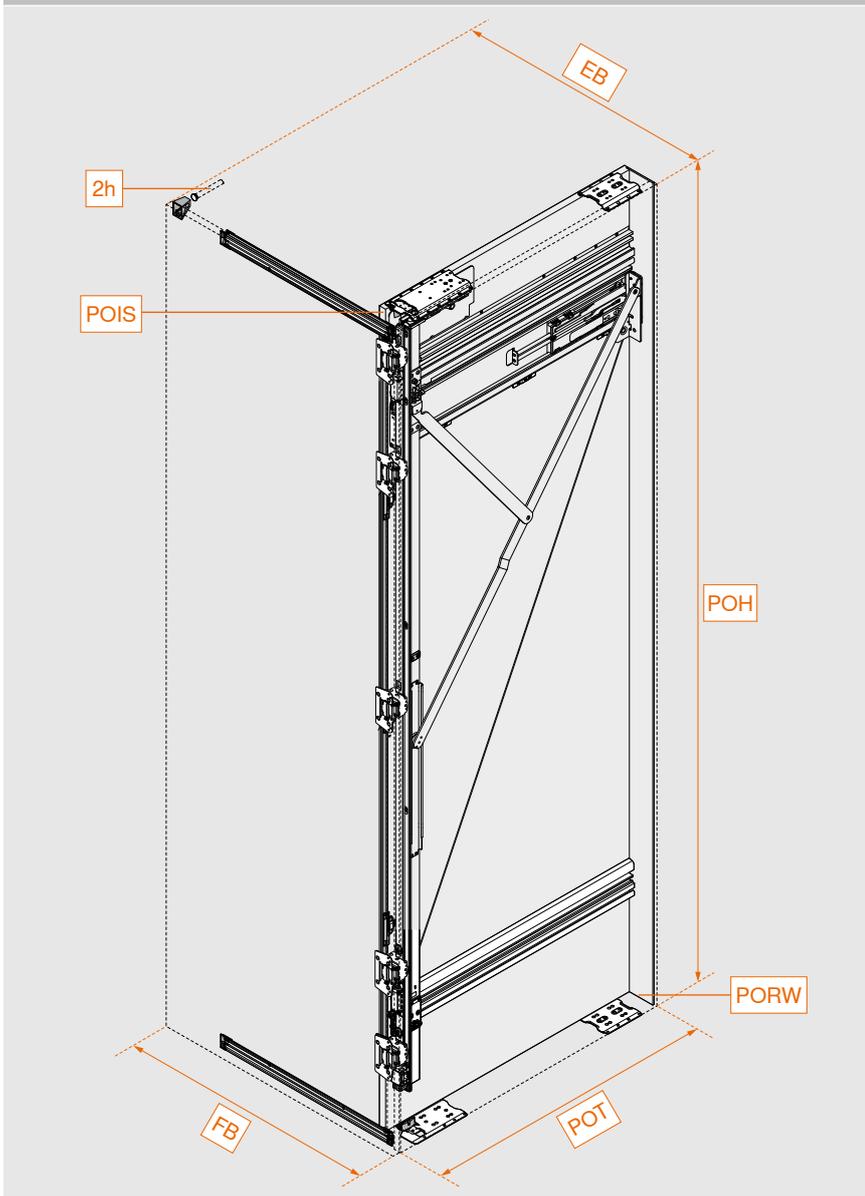

EB	Installation width
FB	Front width
POH	Pocket height
POIS	Internal pocket side
PORW	Pocket back
POT	Pocket depth
2h	TIP-ON incl. catch plate

**i** Fittings selection made easy

Webcode	DQIU7Y
Link	<a href="http://www.blum.com/DQIU7Y">www.blum.com/DQIU7Y</a>

It is easy to work out the fittings and drilling positions you need using the Product Configurator. Still not got your login details for our E-SERVICES? Register here to gain free access.




Product Configurator  
[www.blum.com/rev1pc](http://www.blum.com/rev1pc)



Assembly and adjustment  
[www.blum.com/rev1md](http://www.blum.com/rev1md)

Component overview

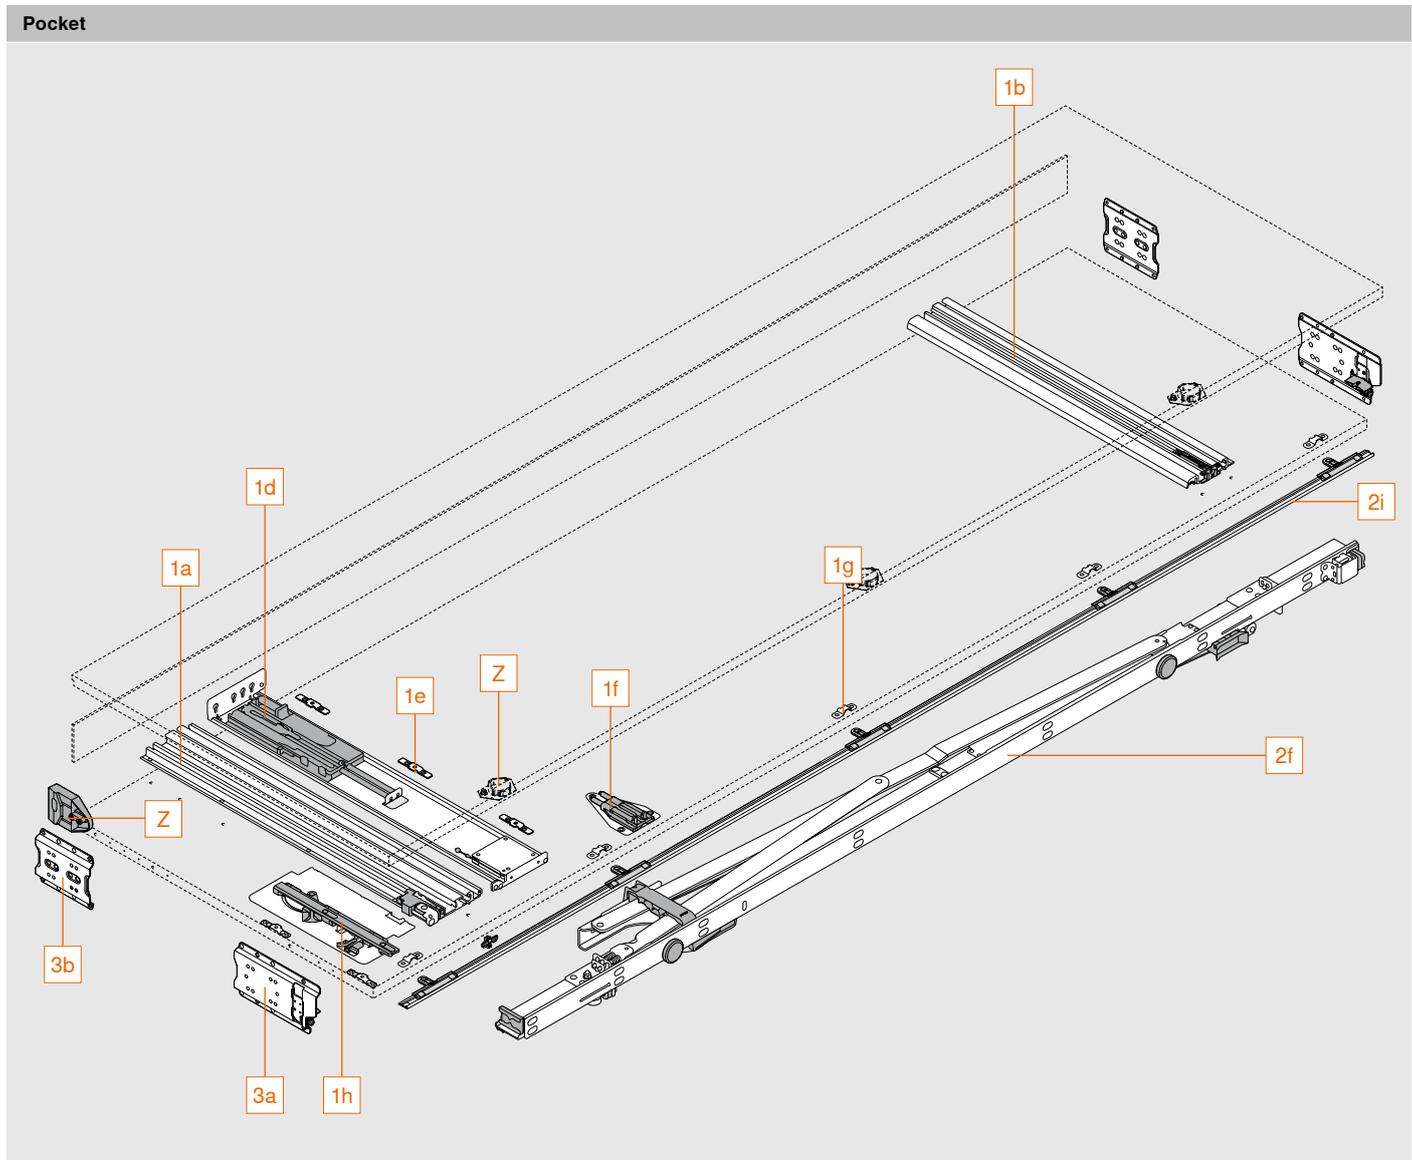


Consisting of:

1a	Top pocket profile
1b	Bottom pocket profile
1d	TIP-ON unit pocket
1e	Fixing clips
1f	BLUMOTION unit pocket
1g	Attachment for pocket cover strip
1h	BLUMATIC unit
2f	Hinge bracket
2i	Pocket cover strip incl. mounting
3a	Front pocket connector
3b	Back pocket connector
Z	Adapter for electrical appliance switch-off
Z	Scuff guard

## Component overview

Front

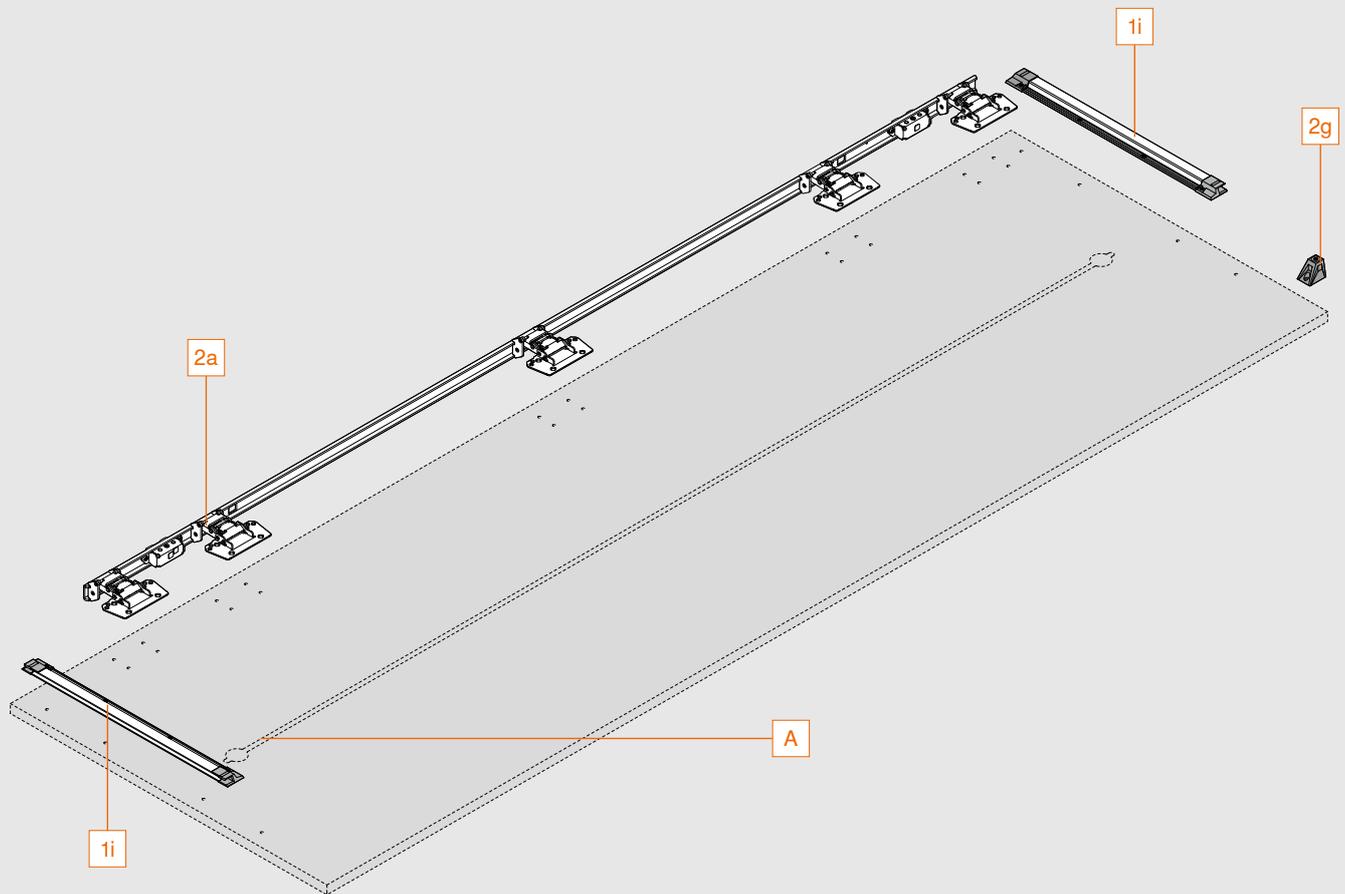

### Consisting of:

1i	Door stabilizer
2a	Hinge strip
2g	TIP-ON spacing

A We recommend at least one alignment fitting with a maximum installation height of 3 mm. Alignment fittings that protrude above a height of 3 mm must not be used in the pocket.

## Ordering information

1 Pocket profile set with TIP-ON				
Nominal length NL (mm)		Min. pocket depth POT* (mm)	Left	Right
450		550	801P450E.L2	801P450E.R2
500		600	801P500E.L2	801P500E.R2
600		700	801P600E.L2	801P600E.R2
700		800	801P700E.L2	801P700E.R2
800		900	801P800E.L2	801P800E.R2

\* Specification without pocket back. A back construction with a back thickness of at least 4 mm is required.  
Pocket profiles and TIP-ON unit pocket can be shortened to an individual nominal length.

### Consisting of:

<b>1a</b>	<b>1 x</b>	Top pocket profile
<b>1b</b>	<b>1 x</b>	Bottom pocket profile
<b>1d</b>	<b>1 x</b>	TIP-ON unit pocket
<b>1e</b>	<b>5 x</b>	Fixing clips
<b>1f</b>	<b>1 x</b>	BLUMOTION unit pocket
<b>1g</b>	<b>5 x</b>	Attachment for pocket cover strip
<b>1h</b>	<b>1 x</b>	BLUMATIC unit
<b>1i</b>	<b>2 x</b>	Door stabilizer: runner profile incl. end cap, black anodized

2 Hinge bracket set				
Pocket height (mm)			Left	Right
1807 – 1956			801T1000.L2	801T1000.R2
1957 – 2106			801T2000.L2	801T2000.R2
2107 – 2256			801T3000.L2	801T3000.R2
2257 – 2406			801T4000.L2	801T4000.R2
2407 – 2556			801T5000.L2	801T5000.R2
2557 – 2706*			801T6000.L2	801T6000.R2
2707 – 2856*			801T7000.L2	801T7000.R2
2857 – 2999*			801T8000.L2	801T8000.R2

\* These specified heights are available on request as a special order, contact your Blum representative.

### Note:

Door cover strips must be shortened to a specific length


### Consisting of:

<b>2a</b>	<b>1 x</b>	Hinge strip, black
<b>2f</b>	<b>1 x</b>	Hinge bracket
<b>2g</b>	<b>1 x</b>	TIP-ON spacing
<b>2h</b>	<b>1 x</b>	TIP-ON incl. catch plate, black
<b>2i</b>	<b>1 x</b>	1 x pocket cover strip incl. 5 x mountings, black anodized
-	<b>29 x</b>	System screws for 1i, 2a and 2g, 6 x 14.5 mm, black

## Ordering information

Pocket connector set			
Select pocket connector set 3 or 4 depending on application			
<b>3</b>	<b>Pocket connector set for application with plinth</b>		
<b>Pocket side thickness (mm)</b>		<b>Colour</b>	
15 – 19		Black	
<b>801V505B</b>			
Pocket connector top + bottom: POVH 10 mm for 0 – 6 mm gap			
POVH Pocket connector height			
<b>Consisting of:</b>			
<b>3a</b>	<b>2 x</b>	Front pocket connector	
<b>3b</b>	<b>2 x</b>	Back pocket connector	
<b>4</b>	<b>Pocket connector set for application without plinth</b>		
<b>Pocket side thickness (mm)</b>		<b>Colour</b>	
15 – 19		Black	
		<b>Left</b>	<b>Right</b>
		<b>801V605B.L1</b>	<b>801V605B.R1</b>
Pocket connector top: POVH 10 mm for 0 – 6 mm gap (POVH 3 mm on request)			
Pocket connector bottom: POVH 3 mm for gap from 7 – 13 mm			
POVH Pocket connector height			
<b>Consisting of:</b>			
<b>4a</b>	<b>2 x</b>	Front pocket connector	
<b>4b</b>	<b>2 x</b>	Back pocket connector	
<b>Z</b>	<b>Accessories</b>		
–	<b>Adapter for electrical appliance switch-off</b>		<b>801ZG0BS</b>
<b>Consisting of:</b>			
<b>1 x</b>	Contact switch adapter		
<b>1 x</b>	Ring magnet with catch plate		
<b>1 x</b>	4 countersunk screws M4x12 for contact switch adapter		
<b>1 x</b>	2 round head screws M4x5 for contact switch adapter		
Suitable exclusively for electrical appliance switch-off with magnetic contact (part number 3623011) from Halemeier GmbH ( <a href="http://www.halemeier.de">www.halemeier.de</a> )			
Liability disclaimer: Blum does not accept any liability for the function of the electrical appliance switch-off			
–	<b>Scuff guard</b>		<b>801ZA00S</b>
<b>Consisting of:</b>			
<b>3 x</b>	External pocket side scuff guard		
For front thicknesses starting from 23 mm			
For front thicknesses less than 23 mm, the scuff guard can be used as additional front protection			
–	<b>System screws, 6 x 14.5 mm, nickel plated</b>		<b>661.1450.HG</b>

Planning

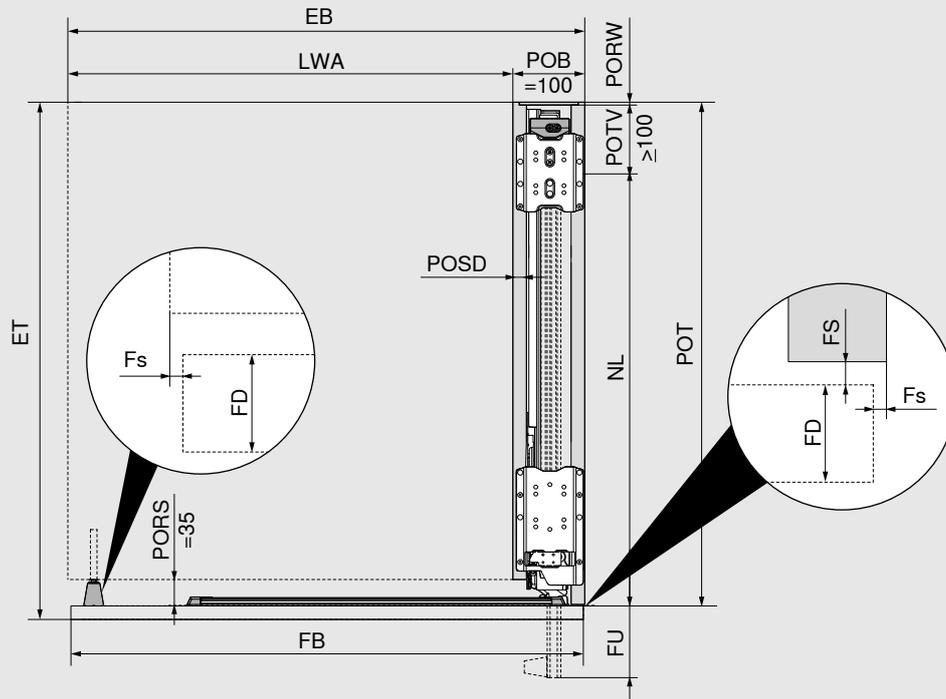

**Installation depth/pocket depth**

$ET = POT + FS (2\text{ mm}) + FD$

Min. POT = NL + POTV ( $\geq 100\text{ mm}$ ) + PORW ( $\geq 4\text{ mm}$ ), max. POT = 979 mm

**Mounting width/internal width within the application**

$EB = LWA + POB (100\text{ mm})$

$FB = EB - 2 \times Fs (1.0 - 4.0\text{ mm})$

Max. NL = FB + 8 mm

$FU = FB - NL + 15\text{ mm}$   
(min. FU = 7 mm)

FD = 18 - 26 mm

**Note**


- FU is dependent on pocket side thickness, gaps and tolerances.
- To ensure optimum functionality, the fronts are slightly tilted inside the pocket.
- A partition side is required for a stand-alone application, or one adjacent to a worktop area.
- A TIP-ON set part no. 956A1004 must be attached in the trigger range for applications with a partition side. We recommend using a screw-on catch plate.
- With front thicknesses (FD) of more than 23 mm, the side gap (Fs), the outside front radius and the inner radius of the external pocket side must be at least 3 mm
- The internal width within the application determines the maximum width to be planned for the internal construction.

EB	Installation width
ET	Installation depth
Fs	Side gap
FB	Front width
FD	Front thickness
FS	Front gap
FU	Front protrusion
LWA	Internal width within the application
NL	Nominal length
POB	Pocket width
POT	Pocket depth
PORS	Pocket back cut
PORW	Pocket back
POSD	Pocket side thickness
POTV	Pocket depth loss

## Planning

### Installation height, front height

#### Application with plinth

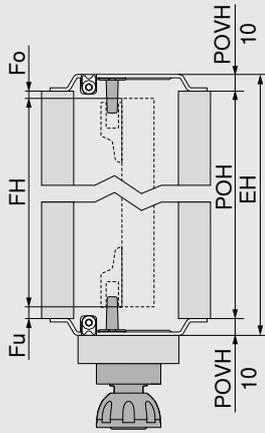

$$FH = POH - Fo - Fu$$

$$EH \leq POH + POVH \text{ top and bottom}$$

$$POH = FH + Fo + Fu$$

$$POVH \text{ 10 mm: gap } 0 - 6 \text{ mm}$$

#### Note

- Note tilt angle when erecting!
- Minimum distance from the front bottom edge to the floor 10 mm, to the next element above and below 6 mm
- Minimum plinth height 80 mm

EH Installation height

Fo Top gap


Fu Bottom gap

FH Front height

POH Pocket height

POVH Pocket connector height

#### Application without plinth

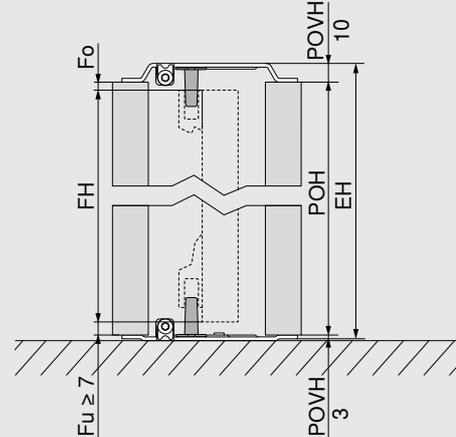

$$FH = POH - Fo - Fu$$

$$EH \leq POH + POVH \text{ top and bottom}$$

$$POH = FH + Fo + Fu$$

$$POVH \text{ top 10 mm: gap } 0 - 6 \text{ mm}$$

$$POVH \text{ bottom 3 mm: gap from } 7 - 13 \text{ mm}$$

#### Note

- Note tilt angle when erecting!
- Minimum distance from the front bottom edge to the floor 10 mm, to the next element above and below 6 mm

EH Installation height

Fo Top gap

Fu Bottom gap


FH Front height

POH Pocket height

POVH Pocket connector height

## Planning

### Internal height and internal depth within the application

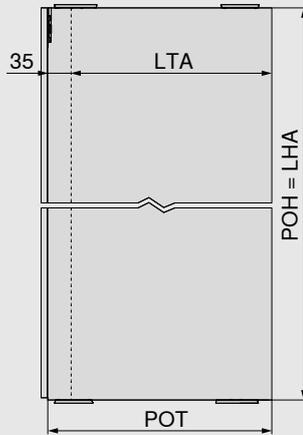

$$\text{LHA} = \text{POH}$$

$$\text{LTA} = \text{POT} - 35 \text{ mm}$$

#### Note


- The internal height/internal depth within the application determines the maximum height/depth to be planned for the internal construction.

LHA Internal height within the application

LTA Internal depth within the application

POH Pocket height

POT Pocket depth

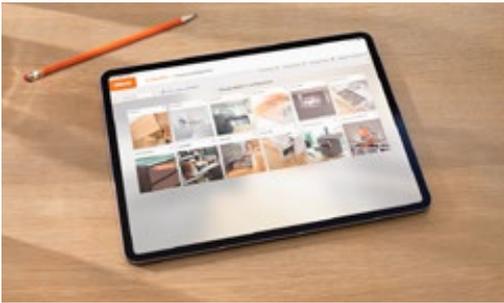

**Product Configurator**

Obtain the exact calculation for assembling the cut-to-size profiles quickly and efficiently using the Product Configurator. The configurator calculates all the dimensions for each configuration and also outputs them as drawings.




[www.blum.com/revpc](http://www.blum.com/revpc)

**Calculations and assembly of the profiles**

**REVEGO duo | Double door**

**Pocket cover strip, door cover strip**

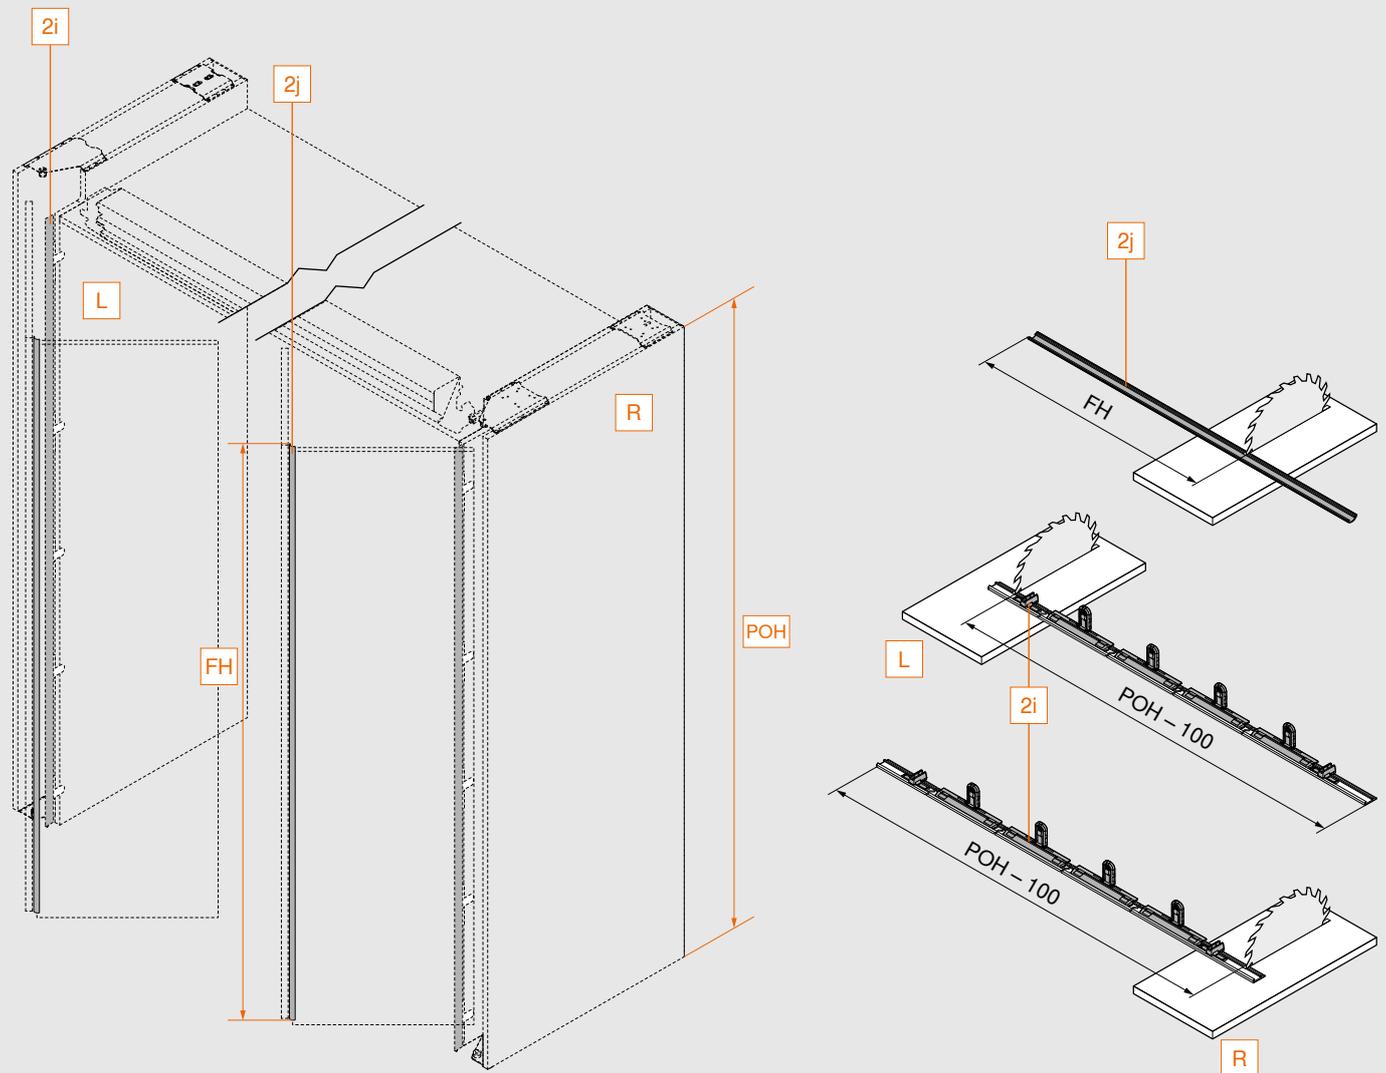


FH	Front height
L	Left
R	Right
POH	Pocket height
2i	Pocket cover strip
2j	Door cover strip

### Calculations and assembly of the profiles

#### REVEGO duo | Double door

##### Roller profile, pocket profile, TIP-ON unit pocket

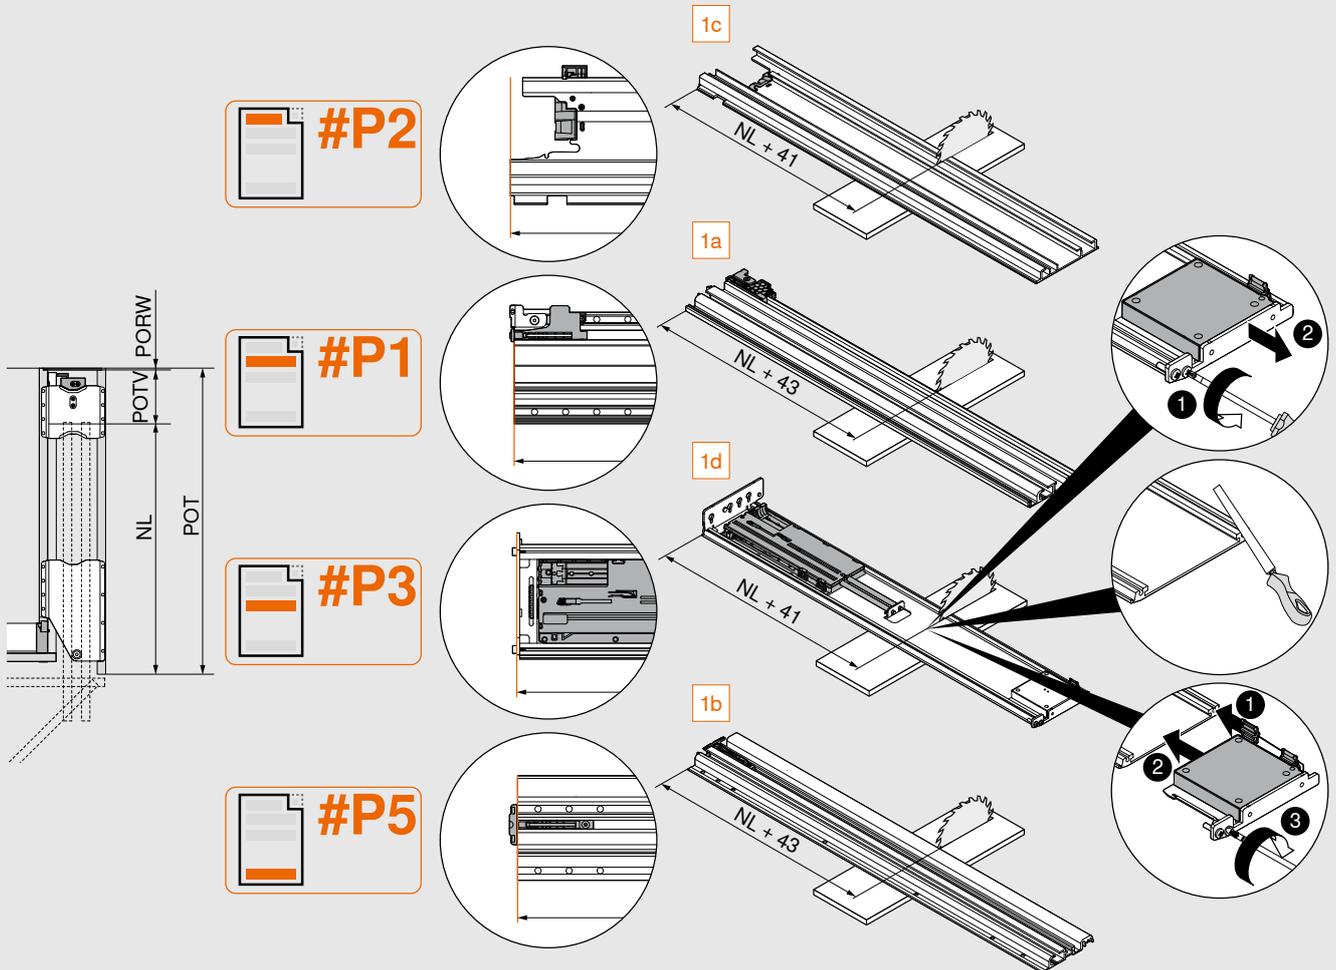

$$NL = POT - POTV - PORW$$

#P1	1a	Top pocket profile
#P2	1c	Roller profile
#P3	1d	TIP-ON unit pocket
#P5	1b	Bottom pocket profile

NL	Nominal length
POT	Pocket depth
PORW	Pocket back
POTV	Pocket depth loss


**Note**

- Pocket and roller profiles as well as TIP-ON unit pocket must not be damaged during cutting to size
- Pocket and roller profiles as well as TIP-ON unit pocket must be cleaned to remove any dirt and deburred before installation

## Calculations and assembly of the profiles

## REVEGO uno | Single door

## Pocket cover strip

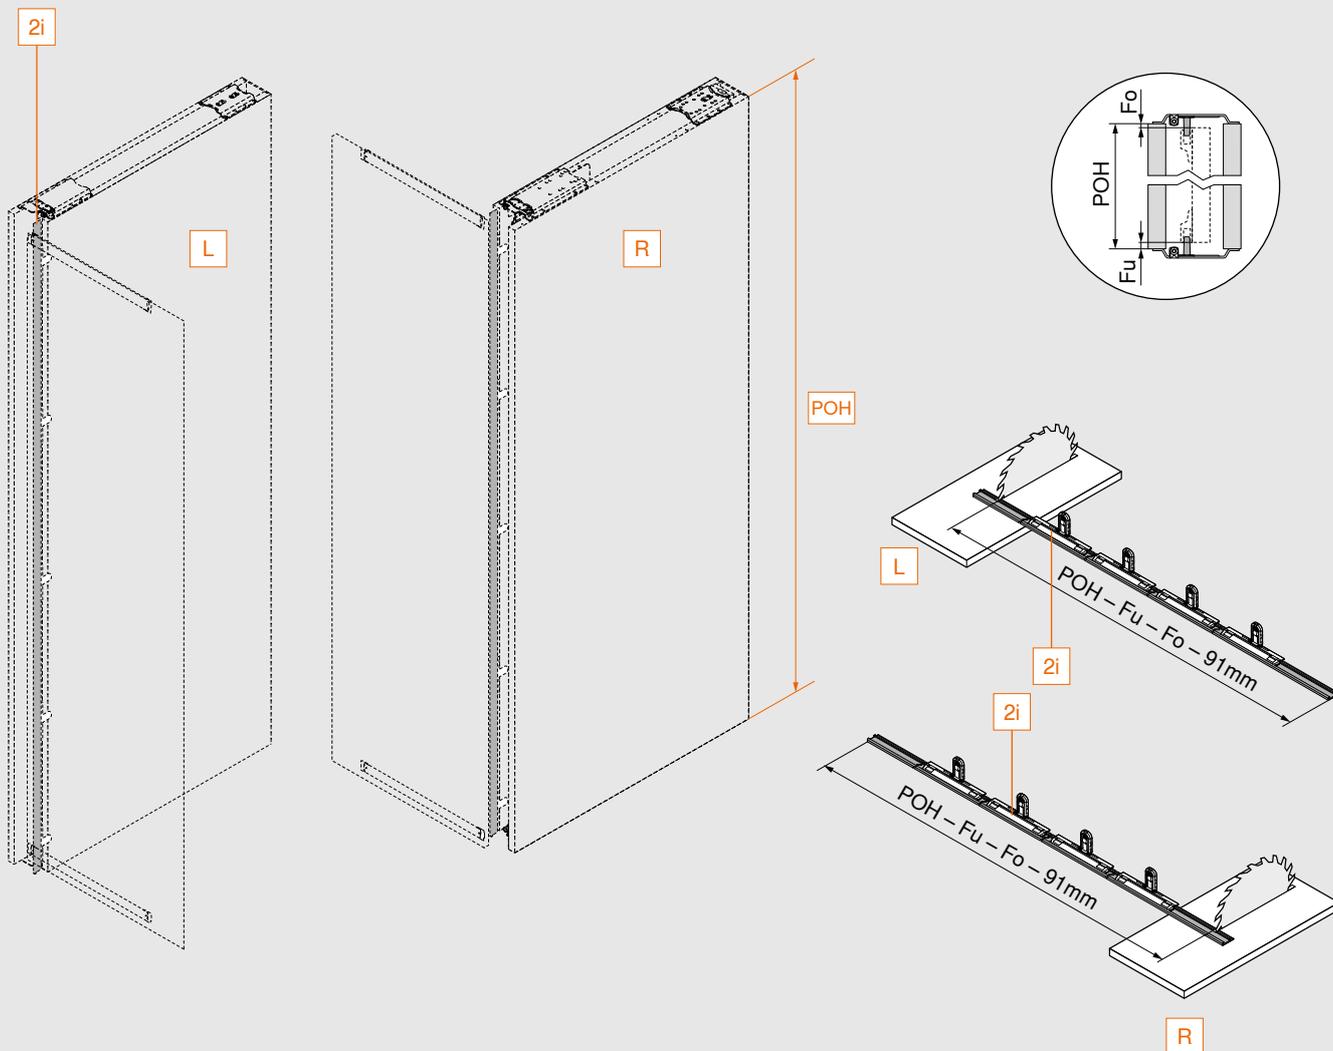


Fo	Top gap
Fu	Bottom gap
POH	Pocket height
L	Left
R	Right
2i	Pocket cover strip

## Calculations and assembly of the profiles

### REVEGO uno | Single door

Pocket profile, TIP-ON unit pocket, door stabilizer

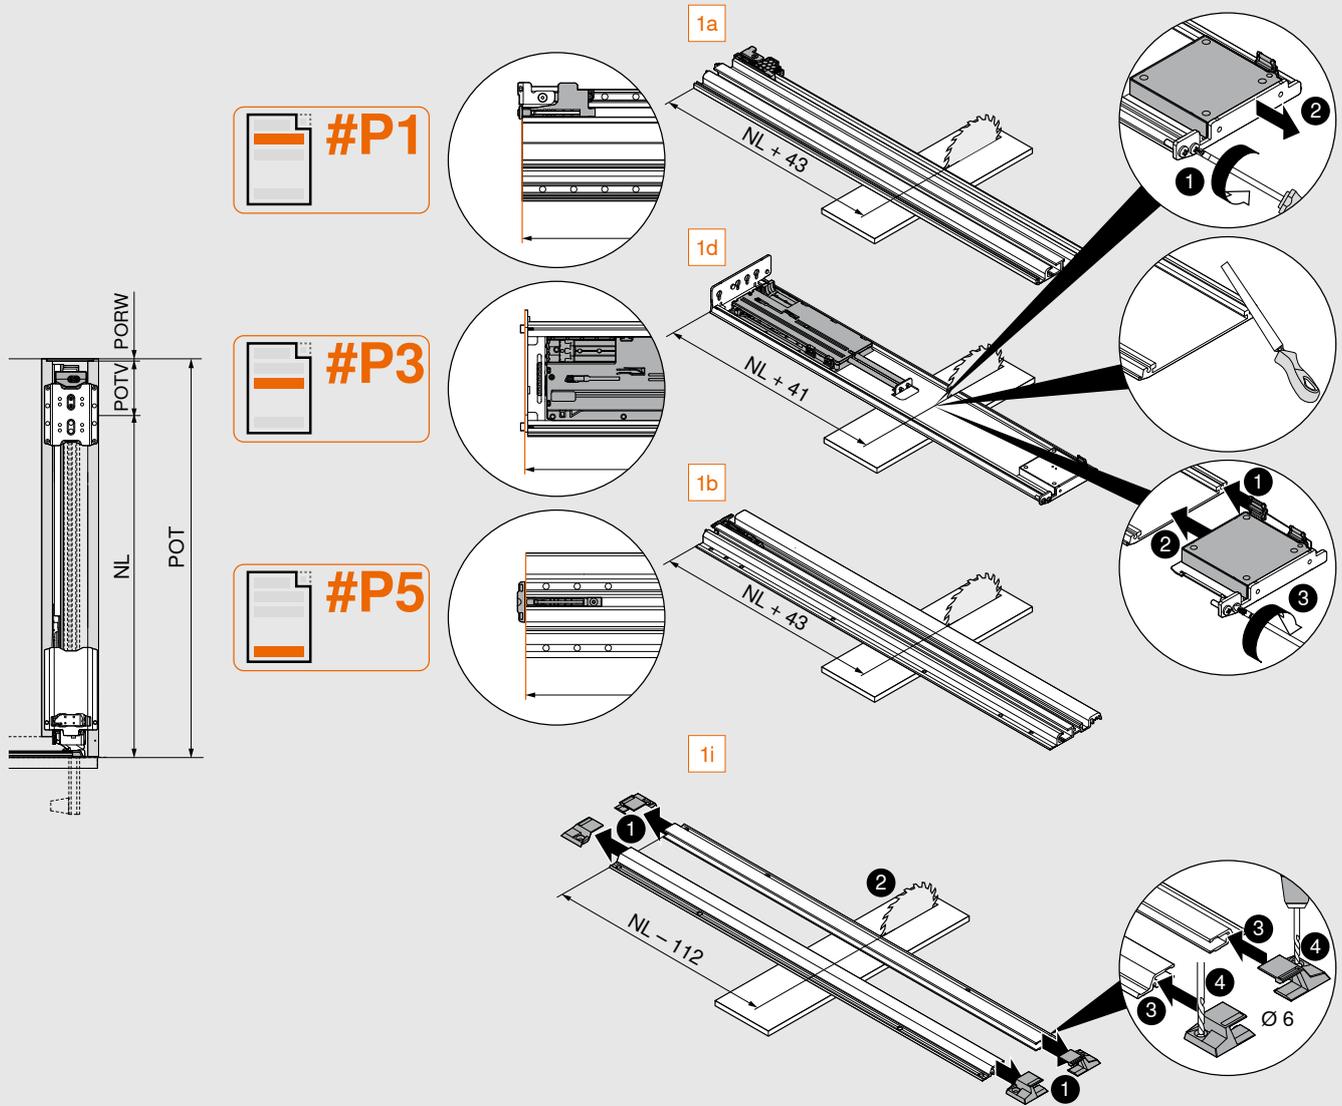

$$NL = POT - POTV - PORW$$

#P1	1a	Top pocket profile
#P3	1d	TIP-ON unit pocket
#P5	1b	Bottom pocket profile
	1i	Door stabilizer

NL	Nominal length
POT	Pocket depth
PORW	Pocket back
POTV	Pocket depth loss

**Note**

- Pocket profiles, TIP-ON unit pocket and door stabilizer must not be damaged during cutting to size.
- Pocket profiles, TIP-ON unit pocket and door stabilizer must be cleaned to remove any dirt and deburred before installation.

# moving ideas

Regardless of the ideas you have, we have the products and services to help you make them a reality. REVEGO inspires new approaches to planning and furniture construction to create new sensations and a better quality of living. Our high-quality pocket systems make planning and assembly easier than ever before for manufacturers, while offering users completely new levels of convenience. Day after day.





## Quality of living

We would like you to enjoy greater convenience and functionality when using furniture.



## Product range

Everything from a single source: our wide range of products allows you to keep up with today's and tomorrow's trends.



## Inspiration

We monitor global trends and strive to create the solutions of tomorrow. We like to share our insights with you.



## Innovation

We stay in motion. Curiosity and pioneering spirit drive us to develop new products and services for you.



## Services

We support your daily operations with customised services tailored to your processes.



## Quality

We continuously strive to improve our products, services and ourselves.



## Trust

We take responsibility for partnerships, our employees, society and the environment.

Julius Blum started our journey in 1952 with horseshoe studs. Today we supply innovative fittings to customers in over 120 countries.

Blum Canada Ltd.  
6775 Maritz Drive  
Mississauga, ON, L5W 0H5  
Tel.: 905-670-7920  
Long Dist.: 1-800-670-9254  
E-Mail: info.ca@blum.com

Julius Blum GmbH  
Furniture Fittings Mfg.  
6973 Höchst, Austria  
Tel.: +43 5578 705-0  
Fax: +43 5578 705-44  
E-mail: info@blum.com  
www.blum.com

Our sites in Austria, Poland and China are certified to the international standards mentioned below.  
Our site in the USA is certified to ISO 9001.  
Our site in Brazil is certified to ISO 9001, ISO 14001 and ISO 45001.



Look for our  
FSC™-certified  
products

All content is copyrighted by Blum.  
Subject to technical modifications and changes to the range without notice.  
IDNR: 714.264.7 - EP-626/1 EN-CA/08.23