



Hinge systems 門鉸

155°-hinge





Overlay application (門蓋3-6分用)
71T7500N


Nil protrusion hinge
平行門鉸
(用於有內櫃桶的櫃體)

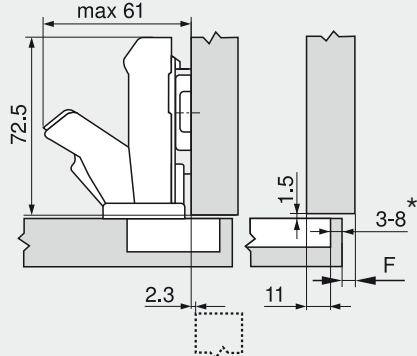

Dual application (門蓋1-2分用)
71T7600N

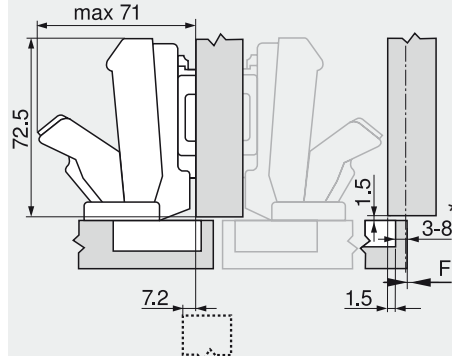

Mitred, 34 mm front overlay and special applications



Mitred, 34 mm max. front overlay and special applications please refer to catalogue

斜接門，門板覆蓋櫃側至34 mm及其他特別應用請參閱商品目錄

F Gap 間隙


*3-8 mm Drilling distance 鉸杯鑽孔距離

Drilling distance 鉸杯鑽孔距離

Front overlay 門板重疊 (mm)																					
		5	6	7	8	9	10	11	12	13	14	15	16	17	18	19					
0											3	4	5	6	7	8					
3									3	4	5	6	7	8							
↑ Mounting plate 底座墊高0或3 mm																					

Front overlay 門板重疊 (mm)	
	-4.5-3.5-2.5-1.5-0.50.51.52.53.54.55.56.57.58.59.5
0	
3	
↑	Mounting plate 底座墊高0或3 mm


Adjustment 調節

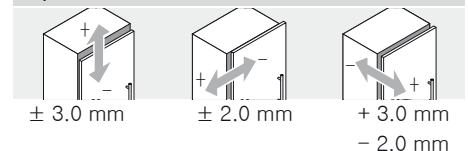

Minimum gap (F) for fronts 門板最少間隙

		Front thickness FS 門板厚度 (mm)									
		20	21	22	23	24	25	26	27	28	
 Drilling distance 鉸杯鑽孔距離	TB	3	0	0	0	0	0	0.5	0.5	1.0	2.0
		4	0	0	0	0	0	0.5	1.0	2.0	
		5	0	0	0	0	0	0.5	1.0	2.0	
		6	0	0	0	0	0	1.0	1.5		
		7	0	0	0	0	0	1.0			
		8	0	0	0	0	0	1.0			
		110°	Opening angle stop 角度限制器								

Hinge boss assembly dimension 鉸杯安裝尺寸

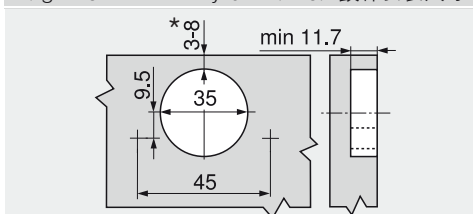

Cruciform mounting plate 十字底座



37/32



-Fixing with chipboard screws
使用木工螺絲

Ø 3.5 and Ø 4 mm

-With height adjustment
高度調節 ± 3 mm




H Height 高度

* Additional screw 附加螺絲



Spacing 墊高	Height 高度	Part no. 編號
0 mm	8.5 mm	173L6100
3 mm	11.5 mm	173L6130

155°-hinge


Hinge 門鉸




Hinge boss is fixed with 2 chipboard screws
鉸杯以兩口木工螺絲固定




Assembly 安裝




Removal 拆卸



Height adjustment 高度調節






Side adjustment 左右調節



Depth adjustment 深度調節


110° Opening angle stop 角度限制器 – 70T7503N (optional 可額外配置)

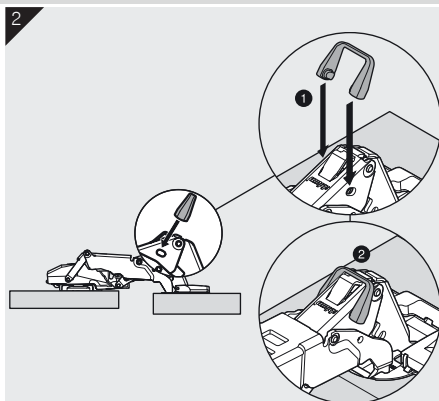

Cleaning Instructions 清潔指引

- Wipe using lightly damp soft cloth
用微濕的軟布抹擦
- Only use clean water,
do not use chemical cleaners
使用清水便可, 請勿使用化學清潔劑

Number of Hinges 門鉸數量

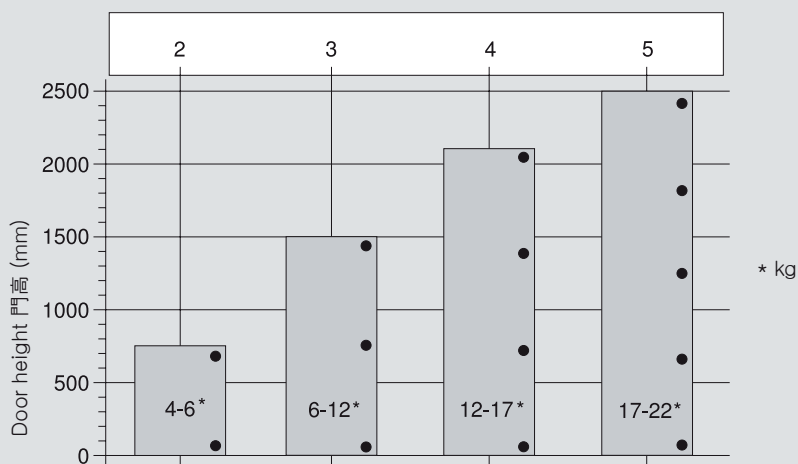

The number of hinges depends on the door weight and front height
門鉸數量取決於門的重量和高度

To achieve good stability, distances between hinges should be as large as possible
請盡量拉大門鉸之間的距離以保持良好的穩定性

Information on weight and height apply to a standard door width of 600 mm
負載數據和高度應用於門闊 600 mm

Blum Furniture Hardware
Hongkong Limited
Tel.: 852-2572 2816
Fax: 852-2572 2817
E-Mail: info.hk@blum.com
www.blum.com.hk

