NEW

COMPACT CLIP

Available August 1, 2022



COMPACT CLIP features

- Utilizes our CLIP technology, so doors can be attached and removed tool-free
- Three-dimensional cam adjustment with directional arrows for easy and precise adjustability
- Same boring pattern as COMPACT BLUMOTION
- Deactivation switch for small/light doors
- Factory setting remains the same, after door removal and repeated attachment, significantly reducing final adjustment time
- Reduces the risk of stripped screws or damage to the face frame
- Pre-mounted screw for time-saving and precise installation
- Blum logo cover caps available

Three-dimensional cam adjustment

Height adjustment: ±5/64"

Side-to-side adjustment: ±1/16"

Depth adjustment: +3/32"-1/32"

Full overlay wraparound hinges


1", 1 1/4", 1 3/8", 1 1/2"

Partial overlay wraparound hinges


3/8", 1/2", 5/8", 3/4"





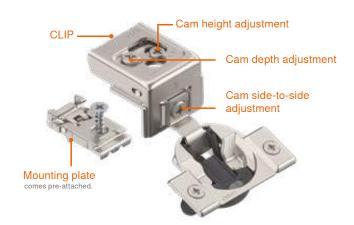

The pre-mounted screw uses a #8 x ¾" Phillips flat head, type 17 self-cutting point screw.



*Actual wraparound dimension is 19.4mm

Hinge	A: opening angle	B: cup depth	C: hinge protrusion	Minimum reveal for 3/4" door
31C3 full overlay	110°	1/2"	15/32"	7/32"
30C2 partial overlay	105°	7/16"	17/32"	9/32"



NEW

COMPACT CLIP Available August 1, 2022





COMPACT CLI	(1/2" cup depth)	
Overlay		Screw-on Pre-mounted screw
1"		31C355BS16
1-1/4"		31C355BS20
1-3/8"		31C355BS22
1-1/2"		31C355BS24

COMPACT CLIP 30C2 for partial overlay (7/16" cup depth)				
Overlay	Screw-on Pre-mounted screw			
3/8"	30C255BS06			
1/2"	30C255BS08			
5/8"	30C255BS10			
3/4"	30C255BS12			

Accessories				
30C logo cover cap	30C2508.BL			
31C logo cover cap	31C1508.BL			
86° Opening angle stop	38C315B3.1			









