



M35.X200.01 – Base router



Safety, set-up, operating and maintenance instructions

EN

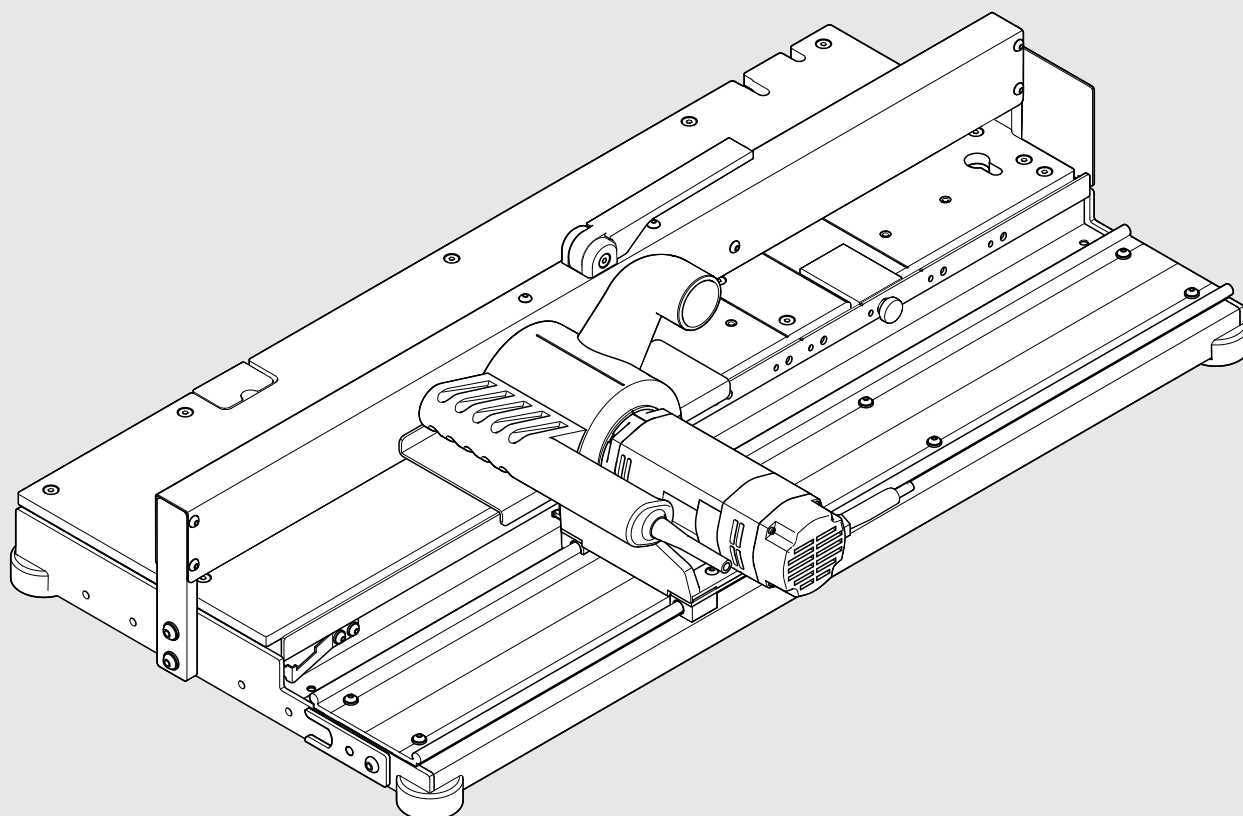

Ensure that the instructions have been fully read and understood before operating the base router. Only appropriately trained and authorised personnel may operate the base router.

Table of contents

3	A – Safety
3	Intended use
4	Warning signs
5	Position of warning signs
7	B – Reference diagrams
10	C – Set-up and start-up
11	Attaching to the work area
13	Connecting the extraction system
13	Connecting the power supply
14	D – Information about milling
14	Milling with depth stop
14	Milling with timber stop
18	E – Processable products, required accessories, work steps
18	Panel thickness 15 to 16 mm
20	Panel thickness 17, 18, 19 mm
22	F – Set-up
22	Stop bar
23	Support stop
25	Depth stop
25	Timber stop
25	Support
26	G – Clamping the workpiece
26	Clamping the drawer base
27	Clamping the back
29	H – Milling the workpiece
29	Milling the drawer base
31	Milling the back
33	I – Maintenance
33	Everyday cleaning
34	Removing and installing the motor
36	Cleaning the housing
36	Removing and installing the cutter
38	Changing the cutting inserts
42	J – Troubleshooting
43	K – Spare parts
44	L – Scope of delivery
45	M – Conformity
45	Technical data

A – Safety

Handling

- Please read the instruction leaflet and the safety information before starting up the base router.
- We recommend that you use the reference diagram for easier identification of the parts being described.

Safety principle

The base router conforms to current safety standards. Nevertheless, certain risk factors will remain if the information contained in this instruction leaflet is not observed.

Residual risk according to DIN ISO EN 12100

- The base router is equipped with all the necessary protection features.
- However, some risk factors will remain for the user, particularly when removing the protective equipment or when control units fail.
- Other risks are identified by warning signs and safety information. It is therefore necessary to observe the safety information.

Intended use

The base router is only intended to process drawer bases for the Blum LEGRABOX and TANDEMBOX. The base router may only be used under the following conditions:

- The base router may only be operated by fully trained personnel.
- The base router is designed for professional traders.
- Only particle board and medium-density fibreboard (MDF) may be used as materials.
- The device should only be installed in dry, enclosed rooms.
- Only for drawer bases with a thickness of 15–19 mm. (depending on device type)
- Only original Blum tools may be used.
- No liability can be accepted for any other use.

Foreseeable misuse

No solid wood or hard wood or plastic may be processed.

Responsibilities

The operator

- must ensure that the base router is only operated and maintained by sufficiently trained staff, who have read and understood the instruction leaflet and, most importantly, the safety section
- is responsible for ensuring that the base router is kept in a safe operating state
- will stop using the base router immediately when faults occur which jeopardise safety.

Risk levels



WARNING

- WARNING indicates a danger that could lead to serious injury if not avoided.



CAUTION

- CAUTION indicates a danger that could lead to injury if not avoided.



NOTE

- The NOTE sign indicates information that should be observed.




WARNING

Serious cuts.

Failure to heed this warning may result in personal injury.

- Only push the slide by the handle.



WARNING

Serious cuts.

Failure to heed this warning may result in personal injury.

- The base router must be disconnected from the power supply before set-up, cleaning and maintenance.

- The base router is only intended for use by **one** person.
- Only attach the base router to a sufficiently stable table.
- Ensure there is sufficient lighting.
- Only operate the base router with the extraction system switched on.
- Before starting work, you should check that the protection devices and mechanical parts are functioning properly. Any damaged parts should be replaced by original parts from Blum.
- Do not make any changes or alterations to the base router.
- For your own safety, use only those accessories which are recommended or specified in the instruction leaflet or Blum sales catalogue.
- Check the electrical cable for damage.

- Ensure that the average air velocity for the extraction system is at least 20 m/sec.
- The negative pressure in the extraction system must be 250–300 mbar.
- Failure to observe the instructions and warnings given for this base router may result in serious injury.
- The instruction leaflet should be accessible at all times.
- When the rocker switch is released, the milling cutter continues to run for a time. Wait for the milling cutter to come to a standstill under all circumstances.

Warning signs



Before connecting the base router to the power supply, you must ensure that you have understood ALL the safety instructions, warning signs and the instruction leaflet.



Keep non-authorised persons away from the base router.

No more than one person may use the base router at a time.




Always wear eye protection when operating this machine.



Wear proper ear protection when operating this machine.



Danger of crushing!




The base router must be disconnected from the power supply before cleaning and maintenance.




Serious cuts.

Position of warning signs

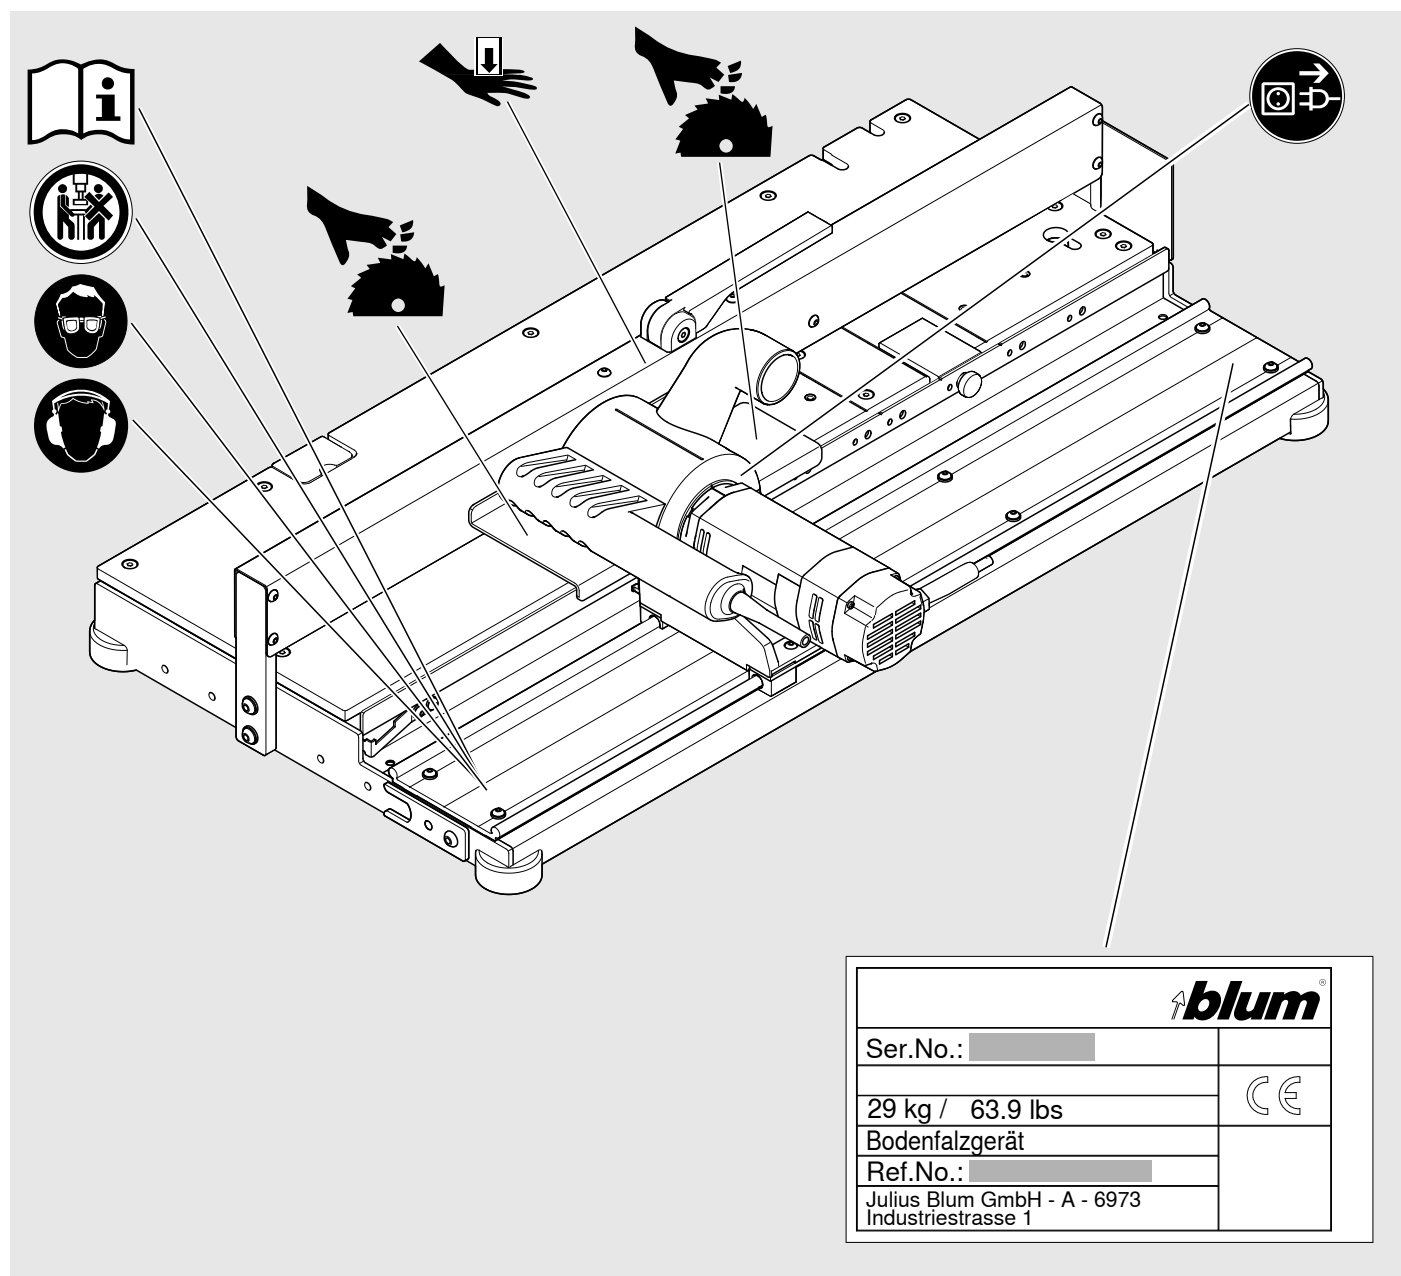


B – Reference diagrams

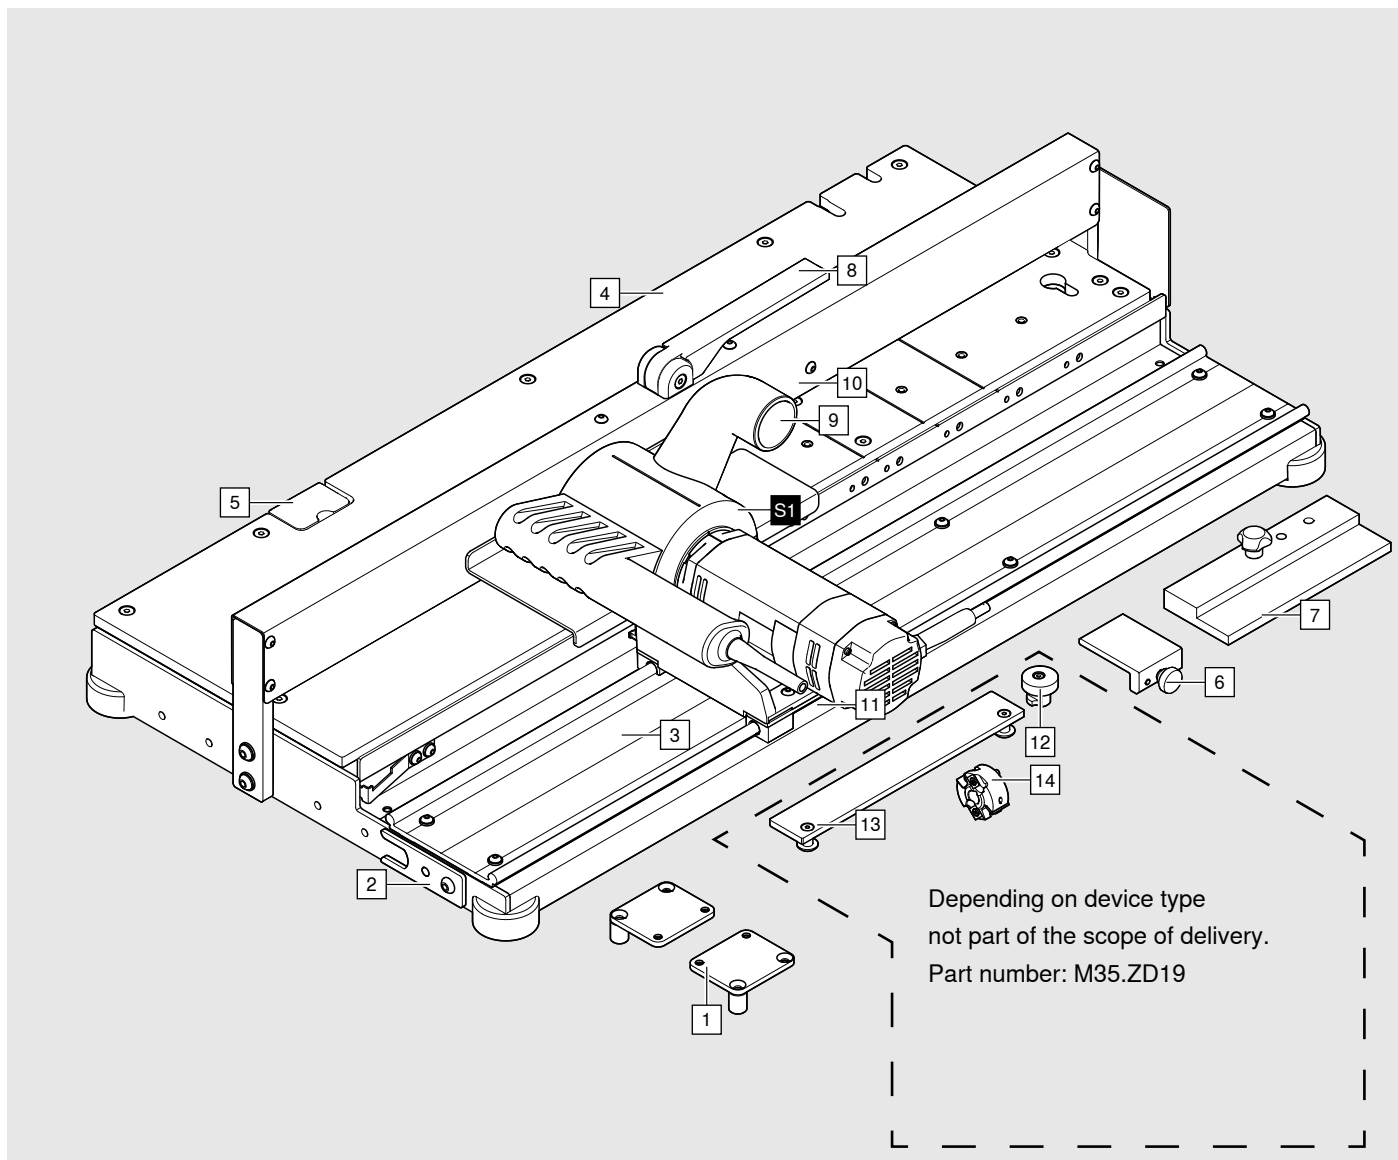


- | | |
|----------------------------------|-----------------|
| 1 Fixing board (delivered loose) | 12 Support stop |
| 2 Shaft holder | 13 Stop bar |
| 3 Runner | 14 Cutter DM 44 |
| 4 Work top | |
| 5 Support | |
| 6 Depth stop | |
| 7 Timber stop | |
| 8 Clamping lever | |
| 9 Extraction socket | |
| 10 Clamping plate | |
| 11 Transportation lock | |
| S1 Slide | |

Reference diagram for slide

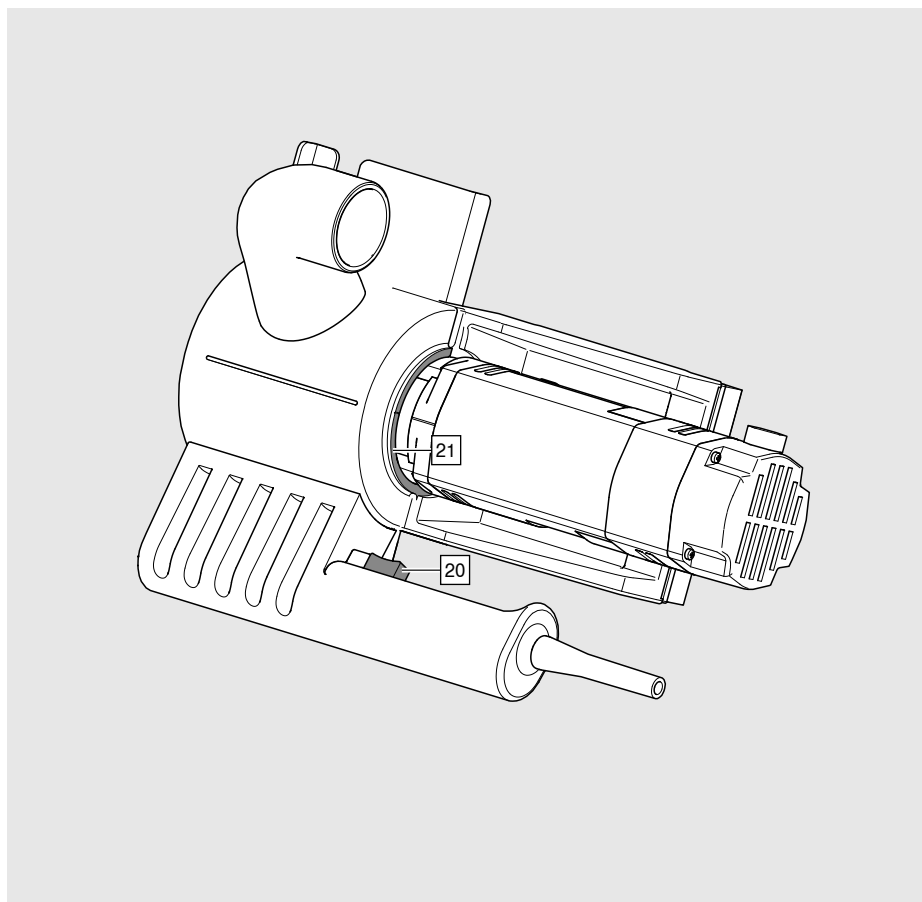


- 20 Rocker switch
- 21 Flange surface

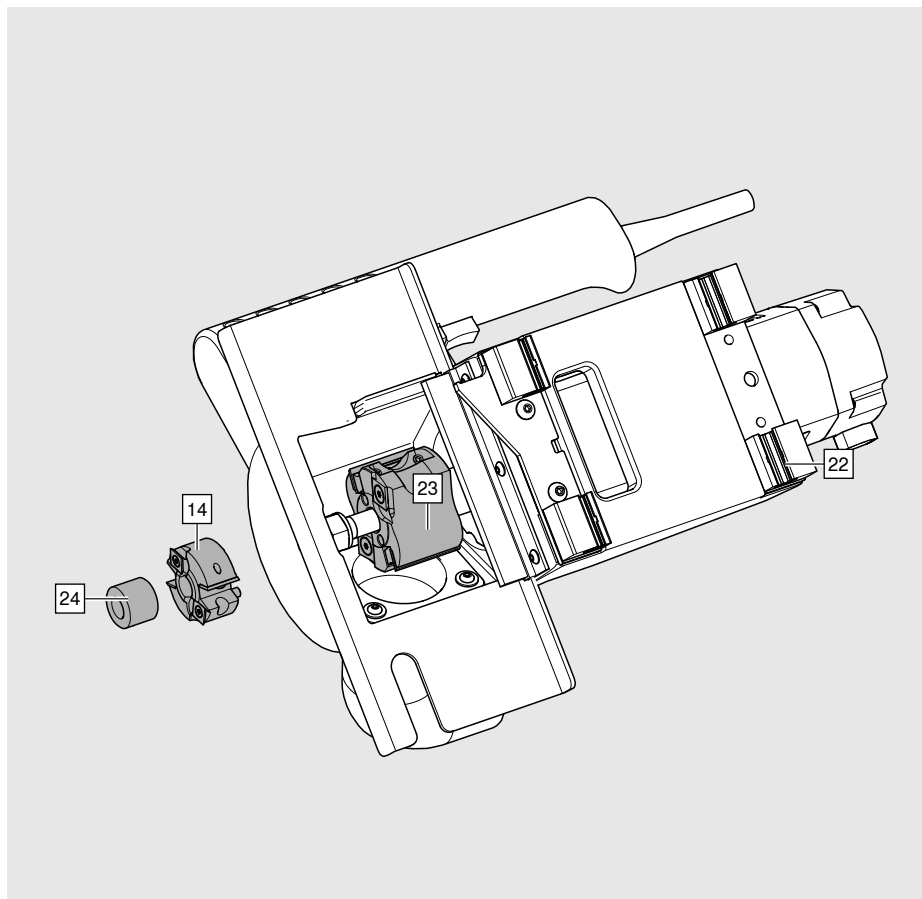

- 22 Sliding film
- 23 Notch cutter
- 24 Spacer sleeve
- 14 Cutter DM 44

Operating elements

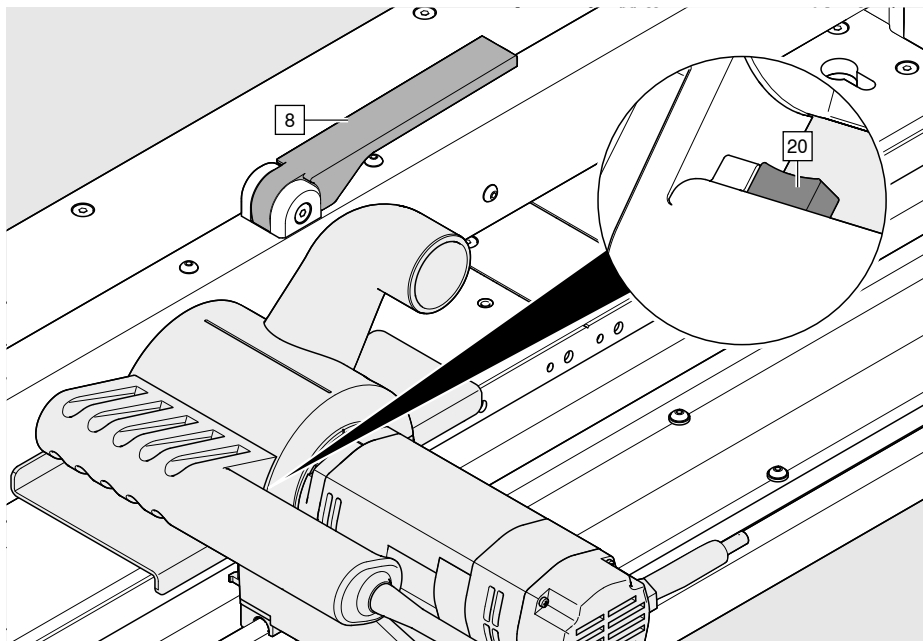

8 Clamping lever

Press down the clamping lever [8] to secure the workpiece.

20 Rocker switch

The rocker switch [20] is used to switch the base router off and on.


Non-stop operation is not possible.

When the rocker switch is released, the milling cutter continues to run for a time.
Wait for the milling cutter to come to a standstill under all circumstances.

In the event of overheating due to overload, the motor will be switched off by the temperature monitoring. After a cooling phase the motor can be operated again.

C – Set-up and start-up


Dimensions and weight

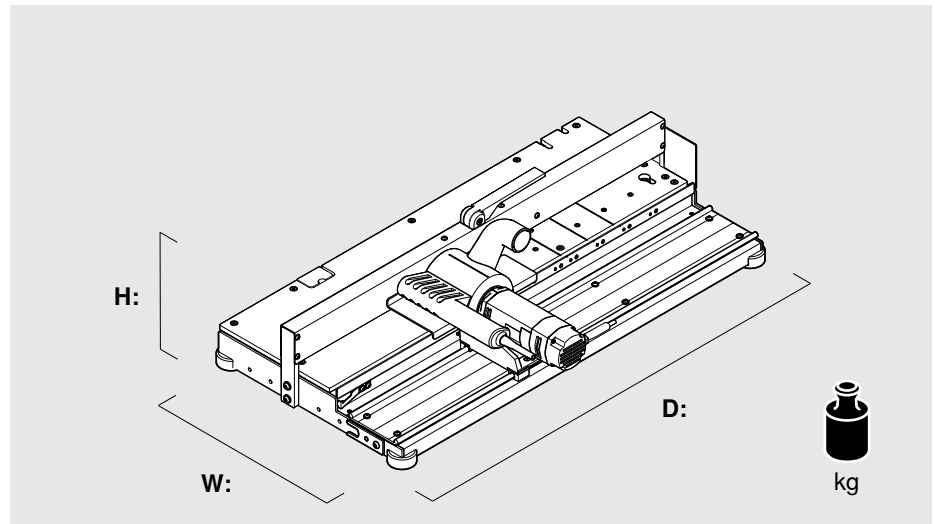

Height (H): _____ 250 mm
 Width (W): _____ 580 mm
 Depth (D): _____ 990 mm
 Weight: _____ 29 kg

- Only use in dry, enclosed rooms.
- Ensure there is sufficient lighting.

Requirements for the work area

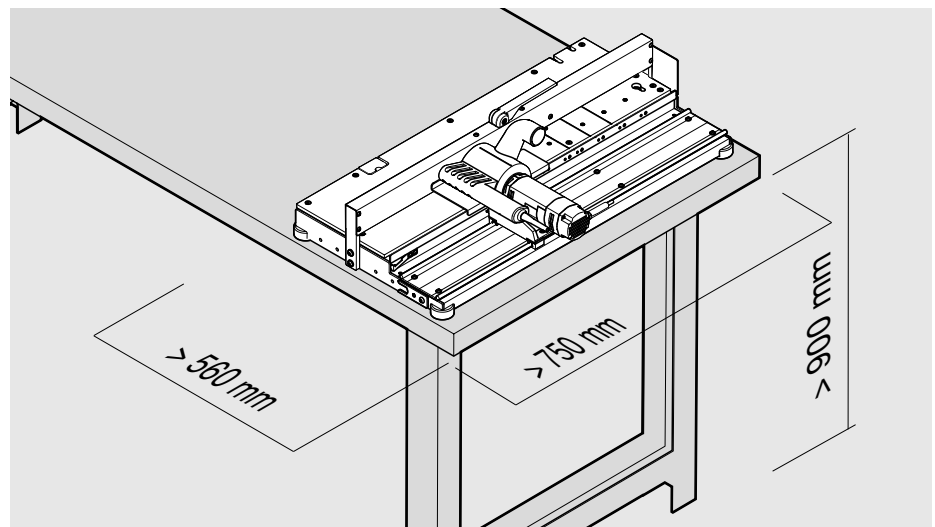

WARNING

The base router weighs 29 kg.
Failure to observe this information may result in personal injury.

- The base router must be lifted by two persons.

- A table height of more than 900 mm is recommended.
- The specified width, depth and height are minimum dimensions.
- The base router must only be used on a stable work top.




WARNING

**The base router must be securely connected to the workbench.
Failure to heed this warning may result in personal injury and material damage.**

The following fixing methods are intended for the base router:


- fixed attachment to the work top
- removable attachment to the worktop

Fixed attachment to worktop

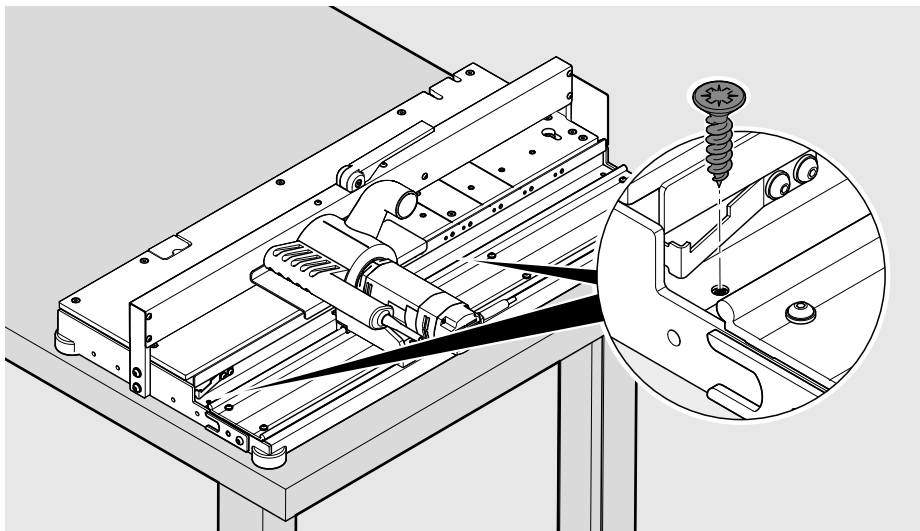


- Screw the base router to the work top.


Removable attachment to worktop

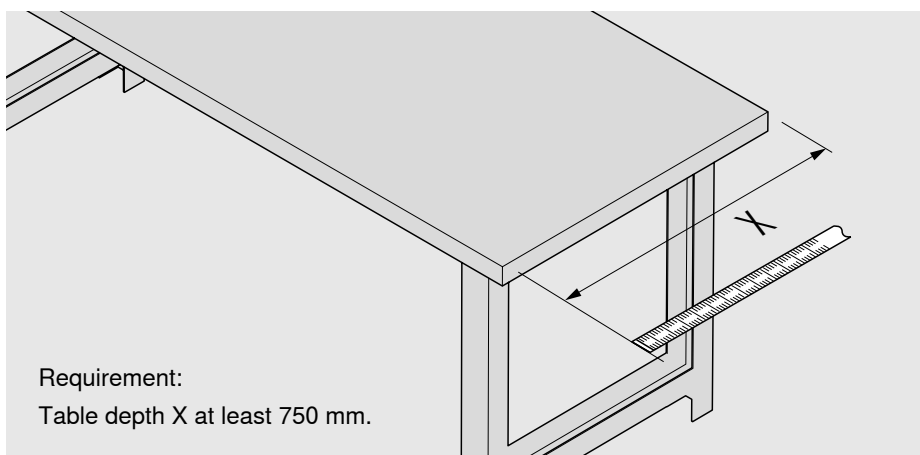

- Measure the depth X of the workbench.

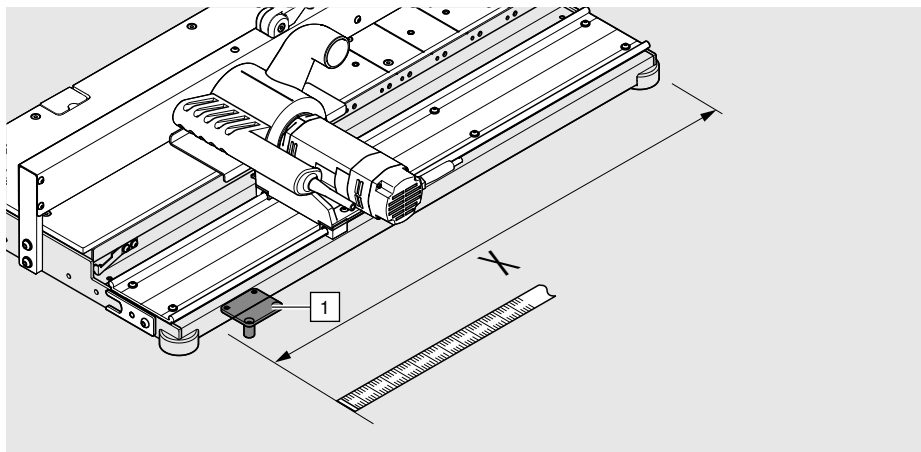


- Position the fixing board [1] within the table length and screw to the frame.

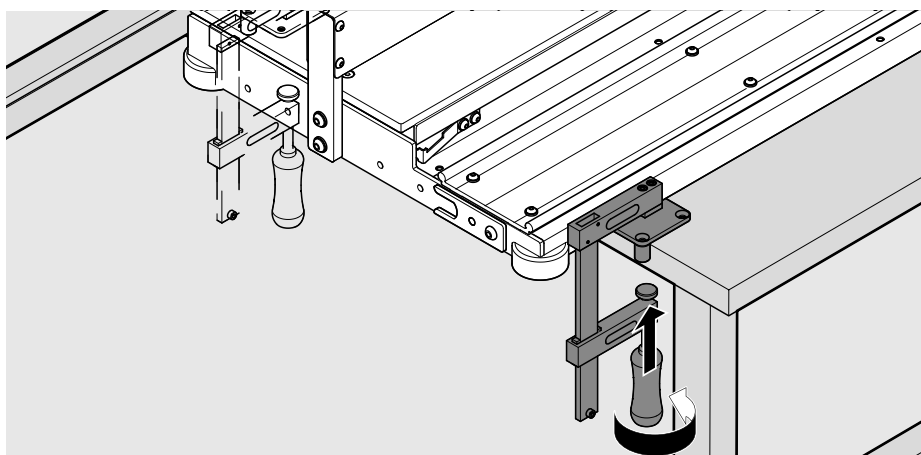

- Secure the base router to the work top with fixing boards [1] and screw clamps.


Removing the transportation lock

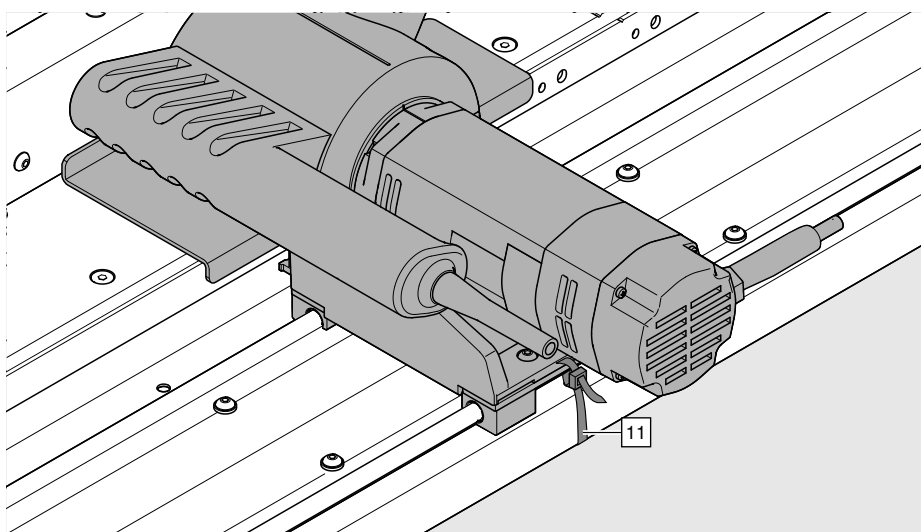

The slide of the base router is secured for transport.

- Remove the transportation lock [11].

Connecting the extraction system

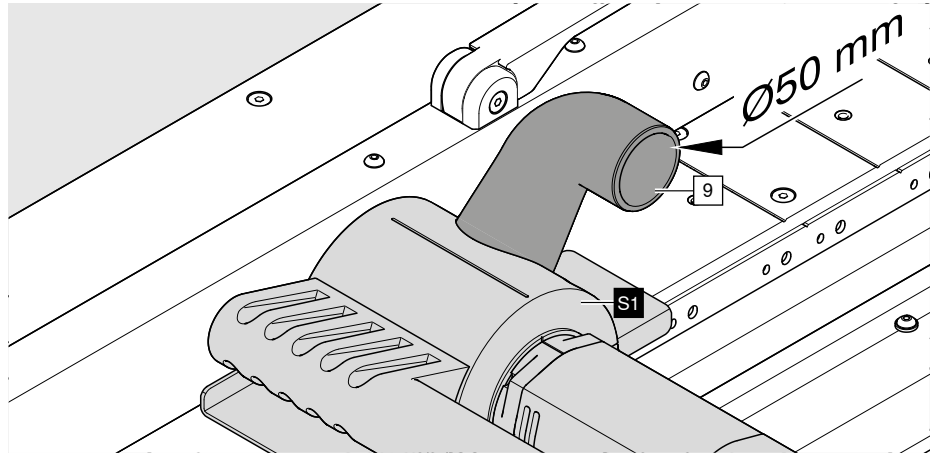

- Insert an extraction hose with an inner diameter of 50 mm into the extraction socket [9] and secure it. Extraction socket [9] outer diameter 50 mm.
- Ensure that the average air velocity for the extraction system is at least 20 m/sec.
- The negative pressure must be 250–300 mbar.
- Move the slide [S1] across the full length. Check that the cable and hose can move freely. Avoid tensioning or scraping the cable and hose.

Connecting the power supply


- Insert the plug.
The base router is designed for 230–240 V 50/60 Hz.

i NOTE

- The outlet must be fitted with a PE protective contact.
- The outlet must have a 16 A fuse.
- After finishing work, disconnect the base router from the power supply.
- Avoid overloading the outlet.
- Do not use the base router together with an extension lead or cable drum.
- Use a separately protected outlet for the extraction system and base router.


D – Information about milling

Milling with depth stop [6] for uncoated workpieces

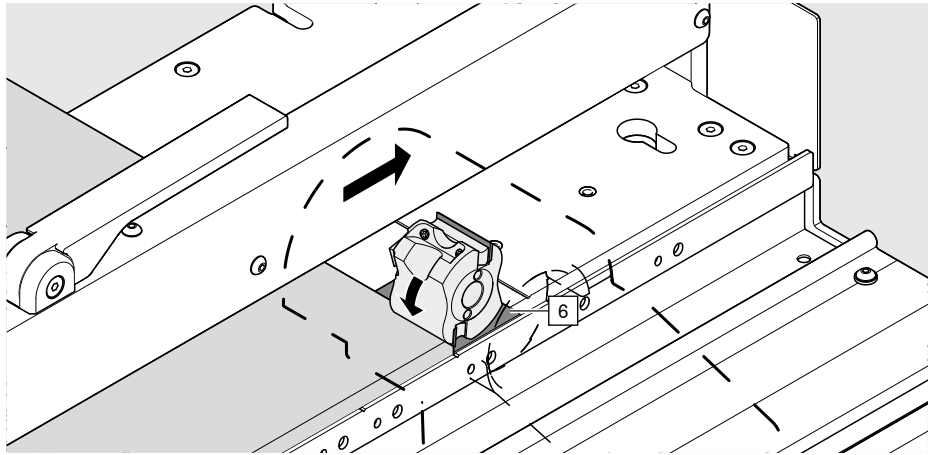

The depth stop [6] is used to position the workpiece.
For workpieces with edge bands and for backs, we recommend using the timber stop [7].

Milling with timber stop [7] for coated workpieces

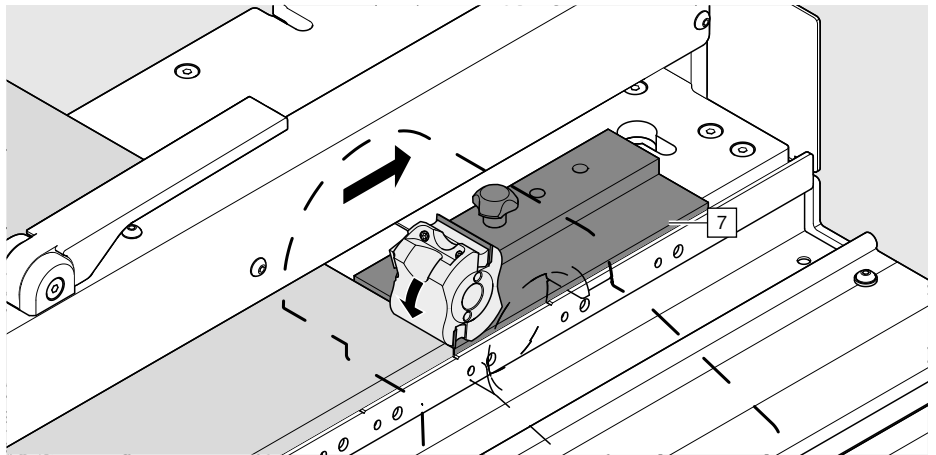


The timber stop [7] prevents torn edges and edge bands. When processing backs, the use of the timber stop [7] is strongly recommended.
The timber stop [7] is designed for small processing quantities and must therefore frequently be replaced.



NOTE

- The timber stop [7] is included loose.
- Spare part – part number: M35.ZT01 (10 pieces)


Timber stop drawing [7]

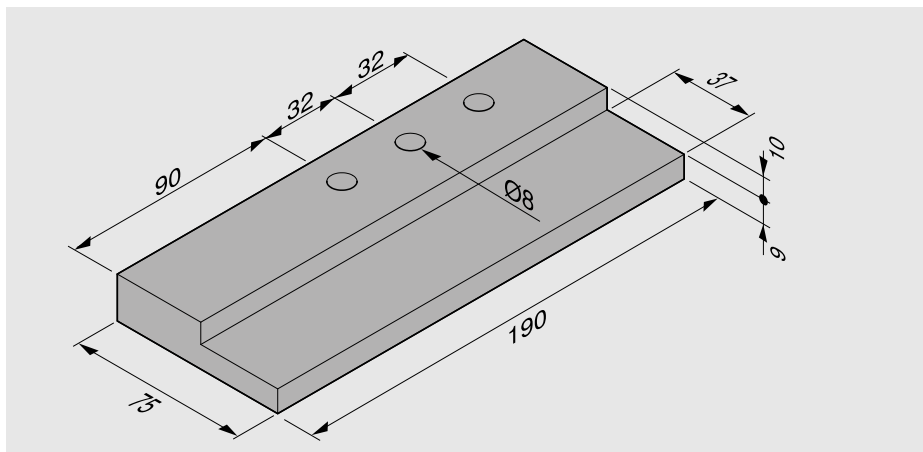


i NOTE

- For in-house production, the timber stop [7] must be pre-notched. This will significantly improve the result of the processed workpiece.


Replacing the timber stop [7]

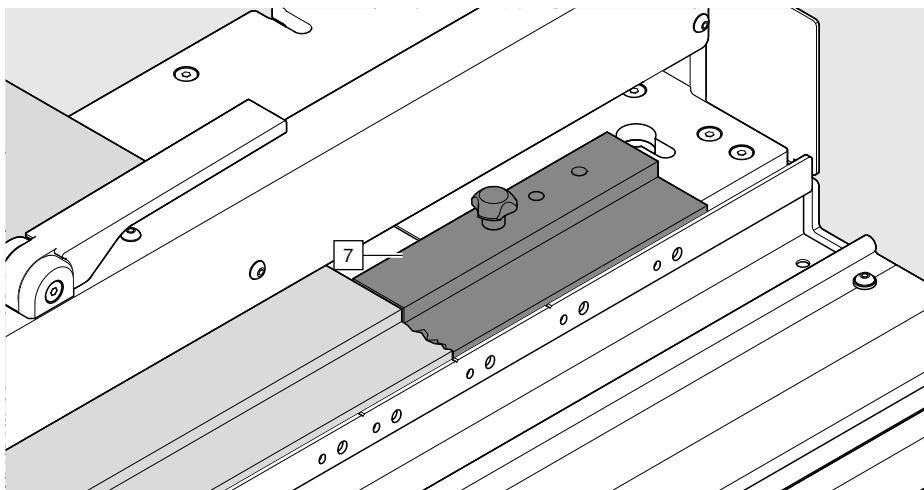

The timber stop [7] becomes worn through frequent milling. This can lead to torn edges on the workpiece. To avoid this, the timber stop [7] must be reworked, if necessary.

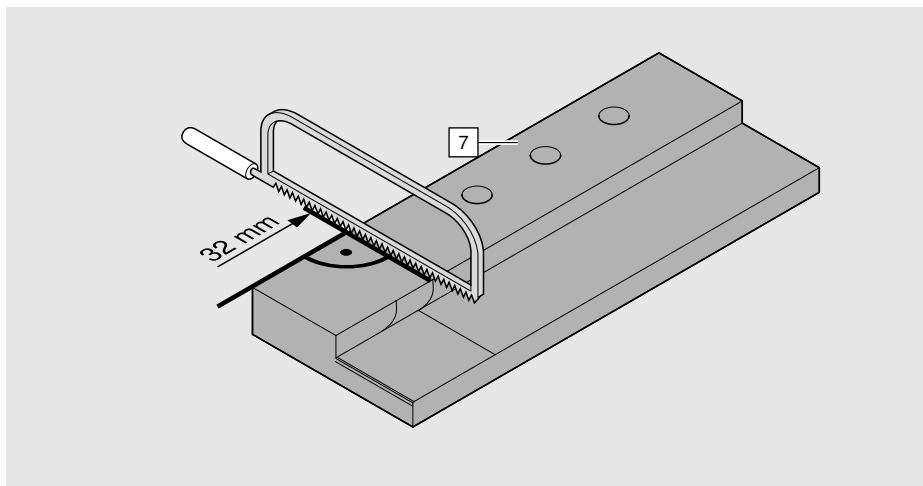


- Shorten the timber stop [7] by 32 mm.



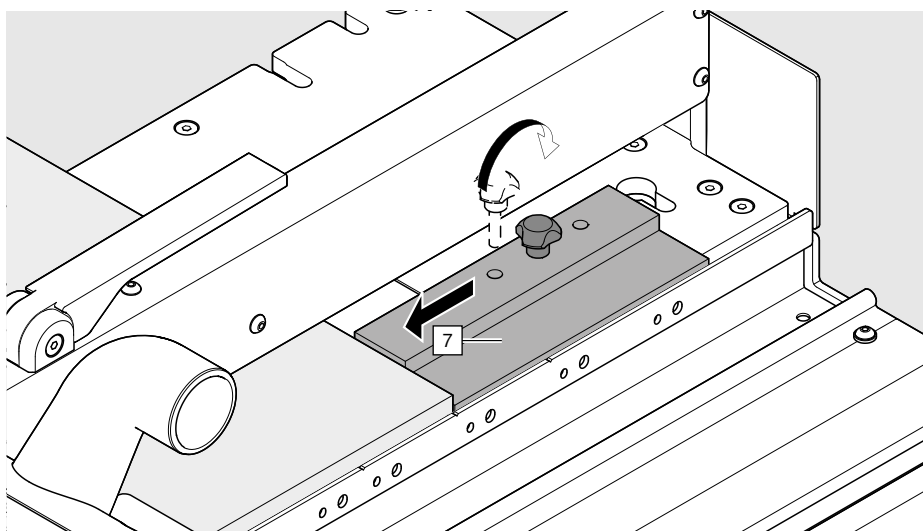



- Reposition the timber stop [7] using the next through-hole.
- The timber stop [7] can be reworked twice.

E – Processable products, required accessories, work steps






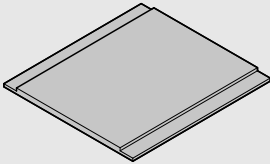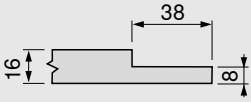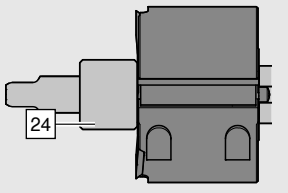

Panel thickness


15 – 16 mm


LEGRABOX	Selecting		Set-up	
	Drawer base [30]	Notch	Cutter fittings	
			 	

In scope of delivery**i NOTE**

- The cutter M35.ZF44.03 should not be used in the processing of panel thicknesses up to 16 mm.
The spacer sleeve [24] must be mounted in place of the cutter.
- For the product TANDEMBOX, no further processing is necessary for panel thicknesses up to 16 mm.

Set-up				Processing
	Depth stop [6]  	Timber stop [7]  	Support [5] 	Clamp workpiece 
	M35.0035.01	M35.ZT01		Mill workpiece 

Panel thickness


>16 – 19 mm

For restrictions for Blum products with panel thickness greater than 16 and up to 19 mm – see page 46:

LEGRABOX

Selecting

Back [31]

Notch

Drawer base [30]

Set-up

Cutter fittings

M35.ZD19

Stop bar [13]

M35.ZD19

TANDEMBOX

Selecting

Back [31]

Notch

Drawer base [30]

Set-up














Cutter fittings














Stop bar [13]

M35.ZD19

M35.ZD19


Depending on device type not part of the scope of delivery

Set-up				Processing
Support stop [12]	Depth stop [6]	Timber stop [7]	Support [5]	
 	 	 		Clamp workpiece 
M35.ZD19	M35.0035.01	M35.ZT01		Mill workpiece 
	 	 		
	M35.0035.01	M35.ZT01		

Set-up				Processing
Support stop [12]	Depth stop [6]	Timber stop [7]	Support [5]	
 	 	 		Clamp workpiece 
M35.ZD19	M35.0035.01	M35.ZT01		Mill workpiece 
	 	 		
	M35.0035.01	M35.ZT01		

In scope of delivery

F – Set-up

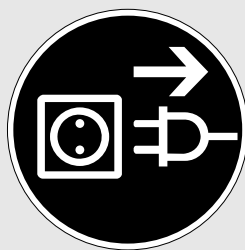


WARNING

Serious cuts.


Failure to heed this warning may result in personal injury.

- The base router must be disconnected from the power supply.

Stop bar [13]
(optional accessory
Part number: M35.ZD19)

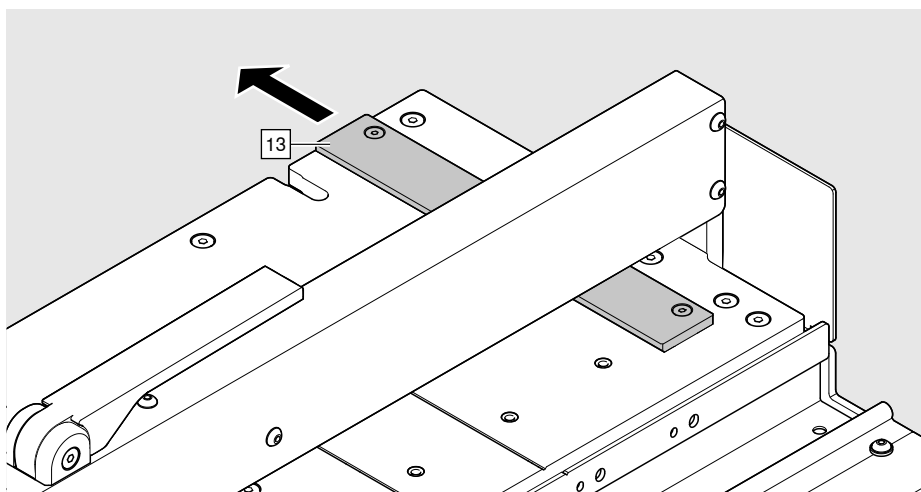


- Remove the stop bar [13] from the parked position.

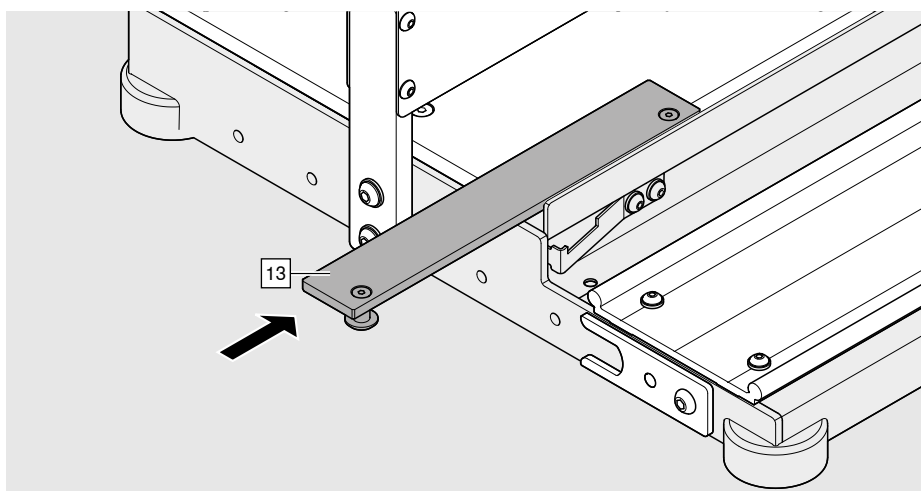


- Push the stop bar [13] into the runner of the base router.


Support stop [12]
(optional accessory
part number: M35.ZD19)

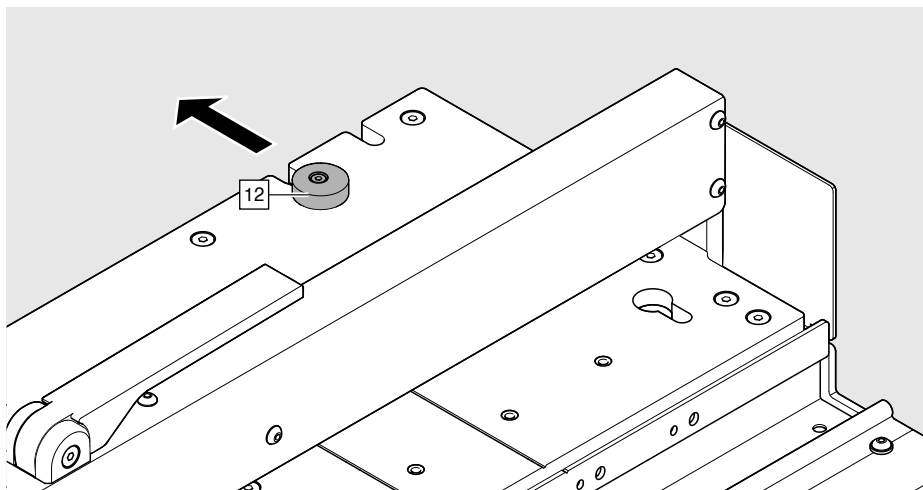


- Remove the support stop [12] from the parked position.

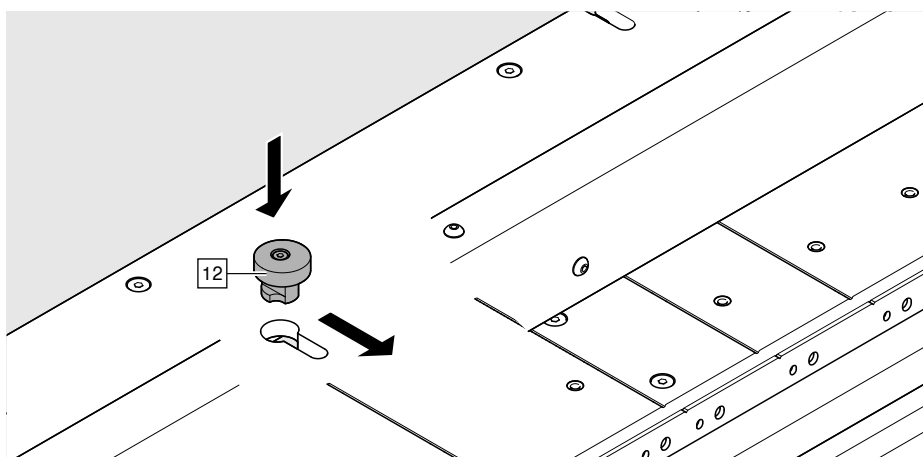

- Mount the support stop [12] in the working position.

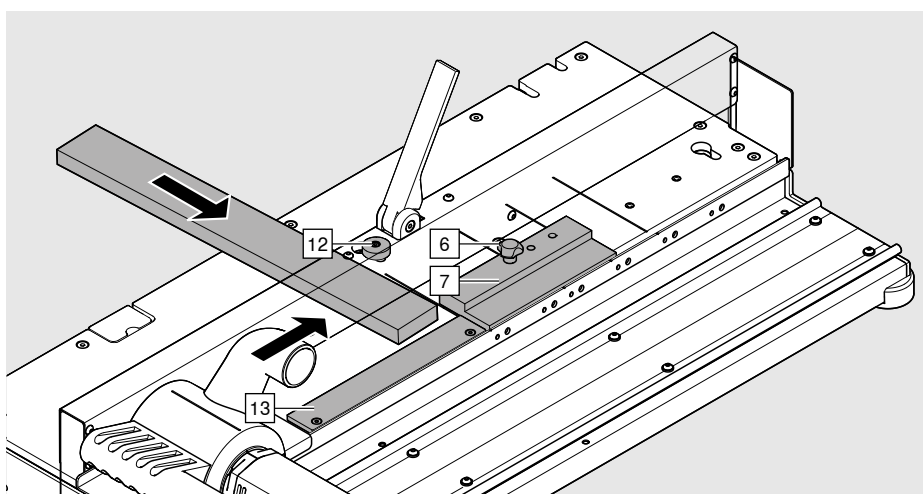


- Mount the depth stop [6] or timber stop [7] in the furthest forward position. See page 25.
- Push the workpiece to the support stop [12], stop bar [13] and depth stop [6] or timber stop [7].

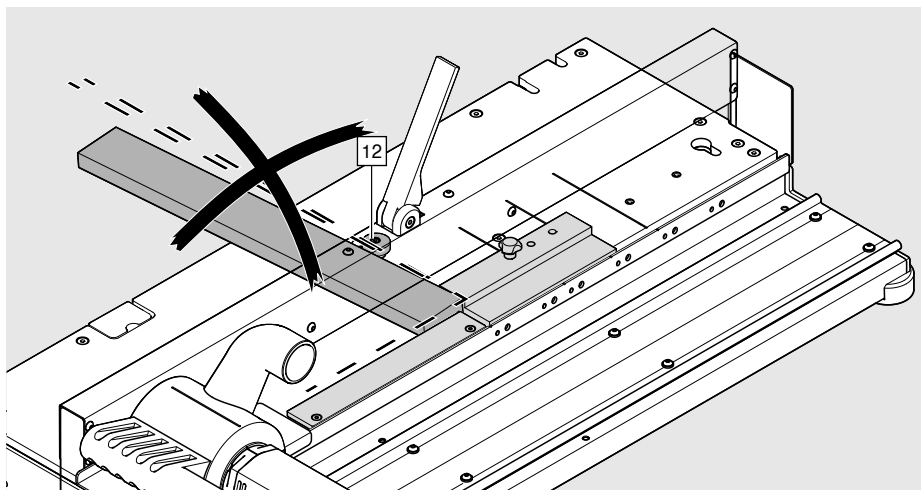

The support stop [12] must be aligned.


- Check whether a right angle is present.

If there is no right angle, proceed as follows:

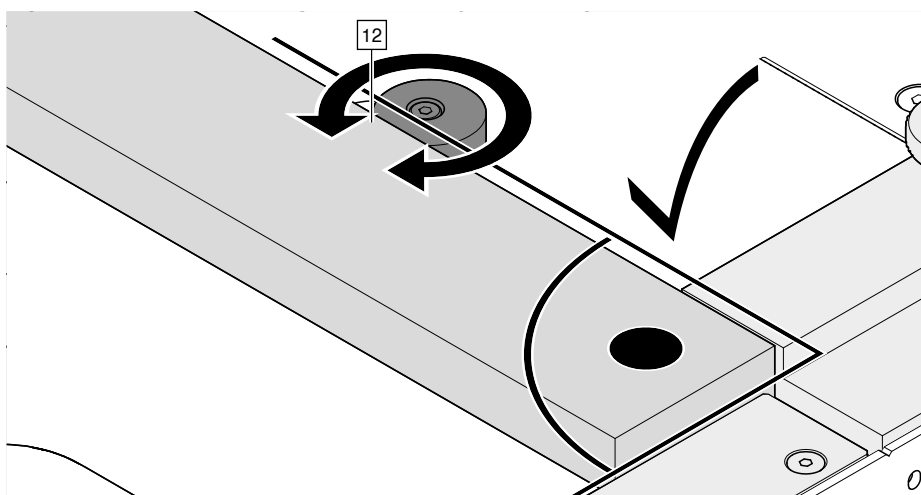


- Loosen the screw of the support stop [12].
- Rotate the support stop [12] until a right angle is formed.
- Screw the support stop [12] into place.

Positioning the depth stop [6]

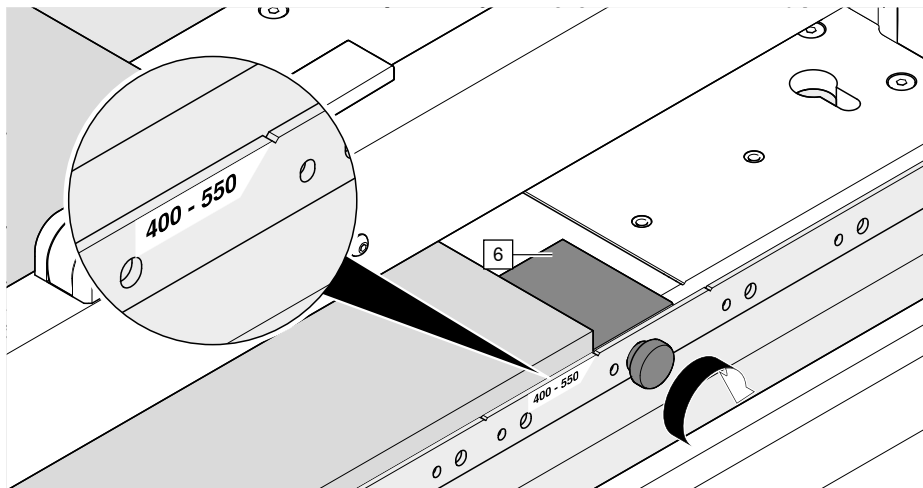


- Mount the depth stop [6] in accordance with the drawer nominal length.
- When processing the back [31], the depth stop [6] must always be mounted in the furthest forward position.

Positioning the timber stop [7]

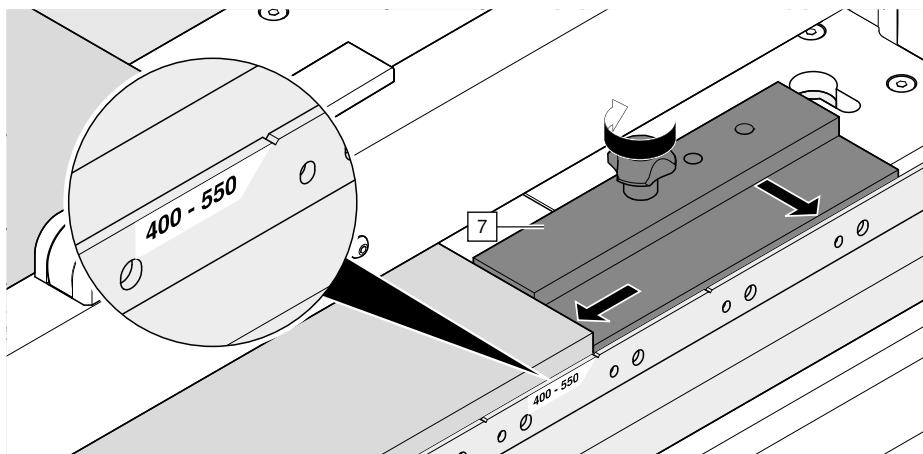

- Mount the timber stop [7] in accordance with the drawer nominal length.
- When processing the back [31], the timber stop [7] must always be mounted in the furthest forward position.

Support [5]

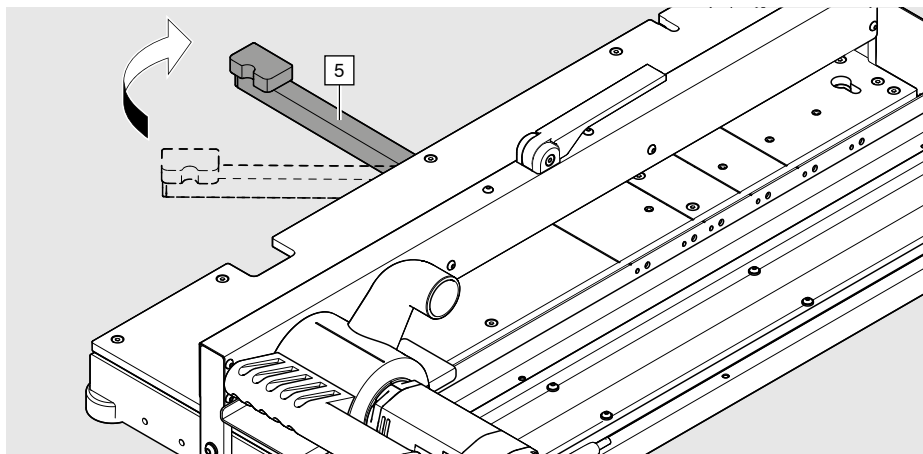


- Drawer base width 500 mm: swivel out the support [5].
- Swivel out the support [5] until the stop (right angle).

G – Clamping the workpiece


i NOTE

- There should be no wood chips on the work top [4] and stop surface as they can affect the accuracy of the notch or damage the surface of the workpiece.


Clamping the drawer base [30]

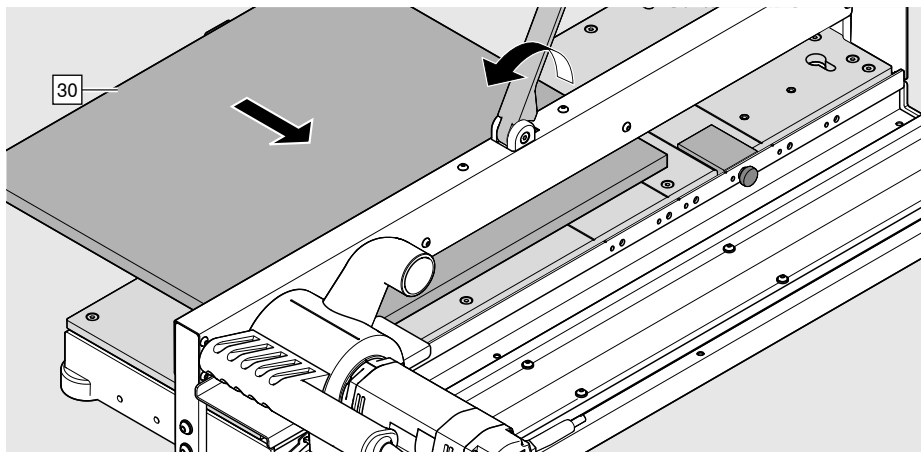

- Lay the drawer base [30] on the base router, as shown.

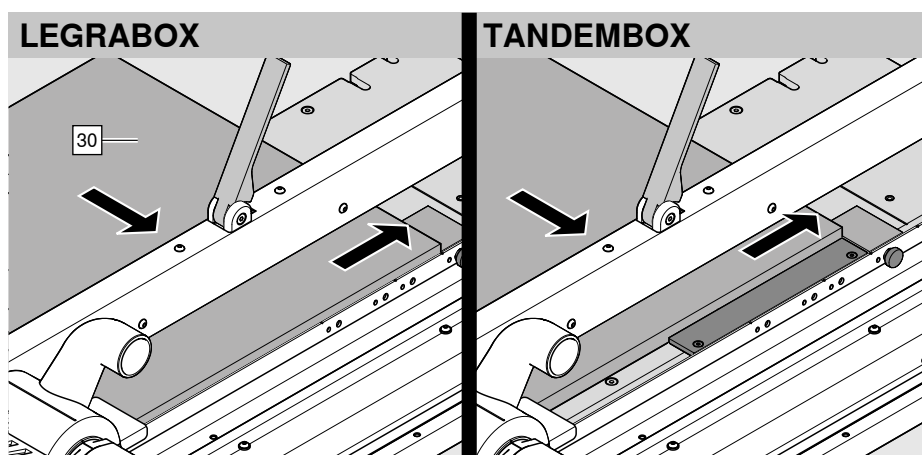

- Push the drawer base [30] onto the stops, as shown.

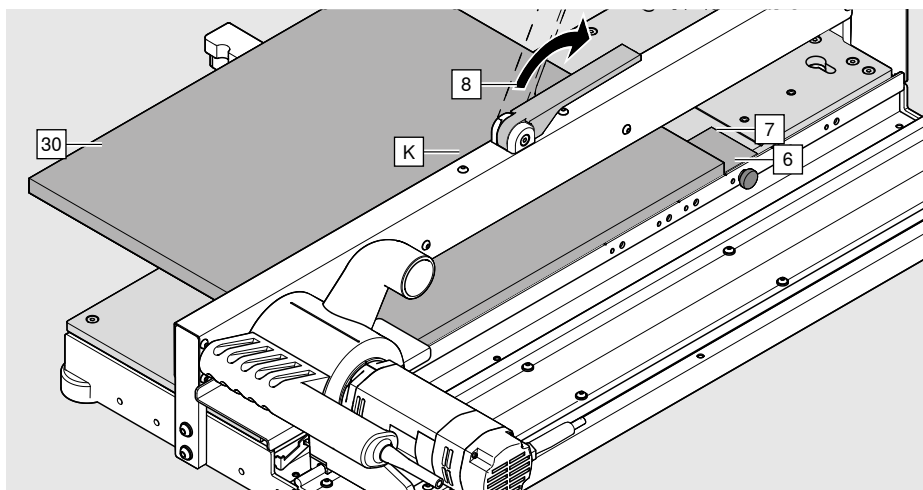
**CAUTION**

- Keep your hands away from the clamp (K).


- Keep the drawer base [30] pressed down on stops [6] [7].
- Push down the clamping lever [8].
- Check again that the workpiece is lying flat against the stops.

Clamping the back [31]**NOTE**


- There should be no wood chips on the work top [4] and stop surface as they can affect the accuracy of the notch or damage the surface of the workpiece.

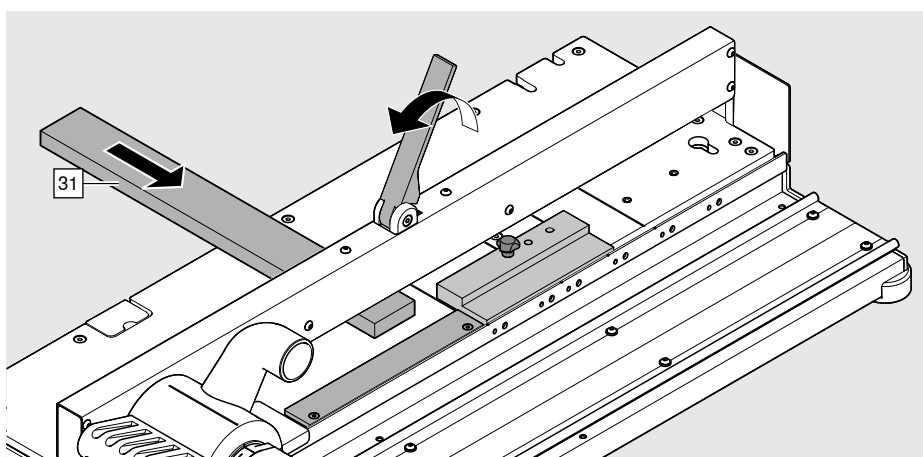

- Lay the back [31] on the base router, as shown.

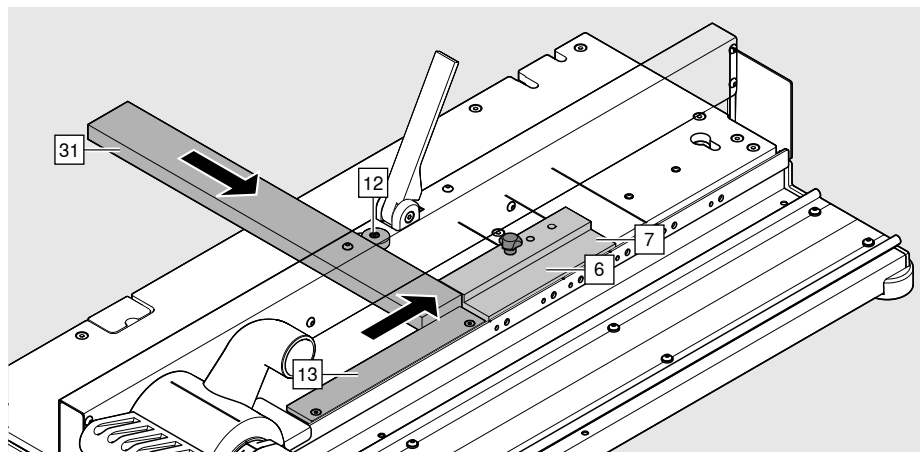

- Push the back [31] onto the stop bar [13], support stop [12] and stops [6] [7], as shown.

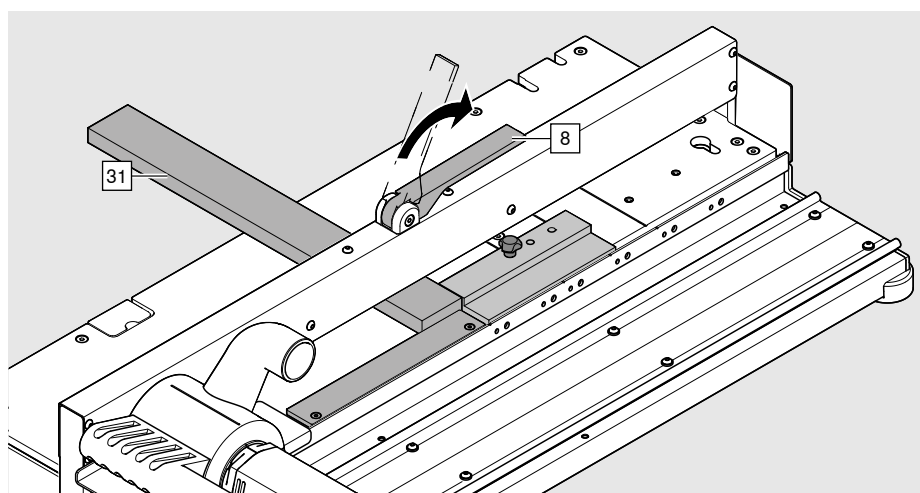

CAUTION

- Keep your hands away from the clamp.

- Keep the workpiece [31] pressed against the stops.
- Push down the clamping lever [8].
- Check again that the workpiece is lying flat against the stops.


H – Milling the workpiece

Milling the drawer base

- Switch on the extraction system.

i NOTE

- The extraction system must always be switched on in order to remove wood chips and dust.

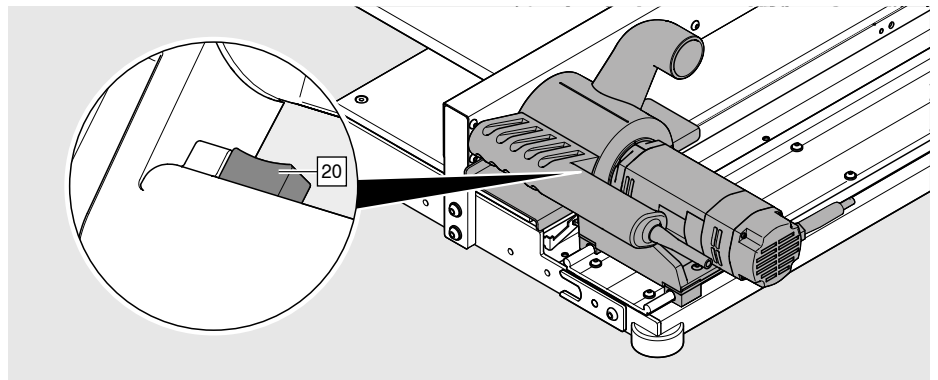


WARNING

Cutting tools can cause serious injury.


- No more than one person may use the base router at a time.
 - Wear eye protection.
 - Wear ear protection.
-
- Press the rocker switch [20].

i NOTE

- Always allow the motor to reach full speed.
- A cutter with sharp blades considerably relieves the load on the motor and therefore extends its service life.
- The feed rate affects the quality of the notch.
- In the event of overheating due to overload, the motor will be switched off by the temperature monitoring. After a cooling phase the motor can be operated again.

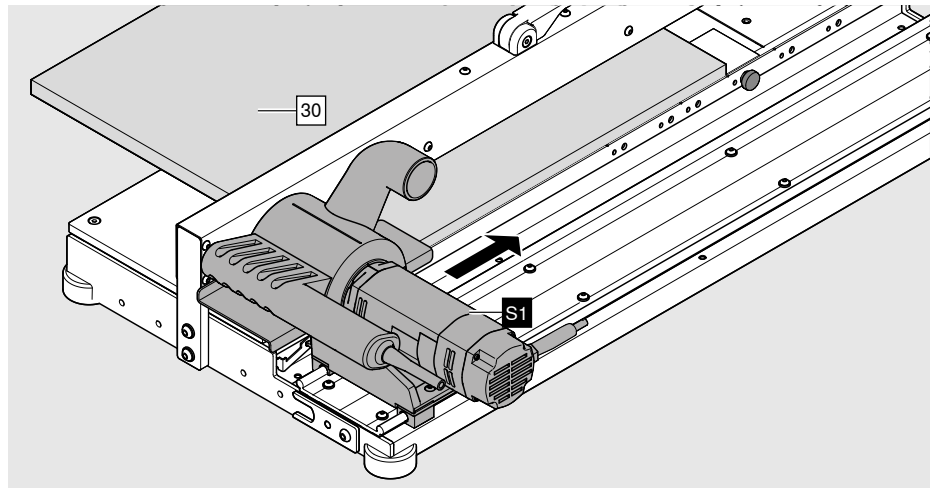

- Push the slide [S1] gently into the drawer base [30].
- At the end of the drawer base [30], gently draw the slide out from the material.

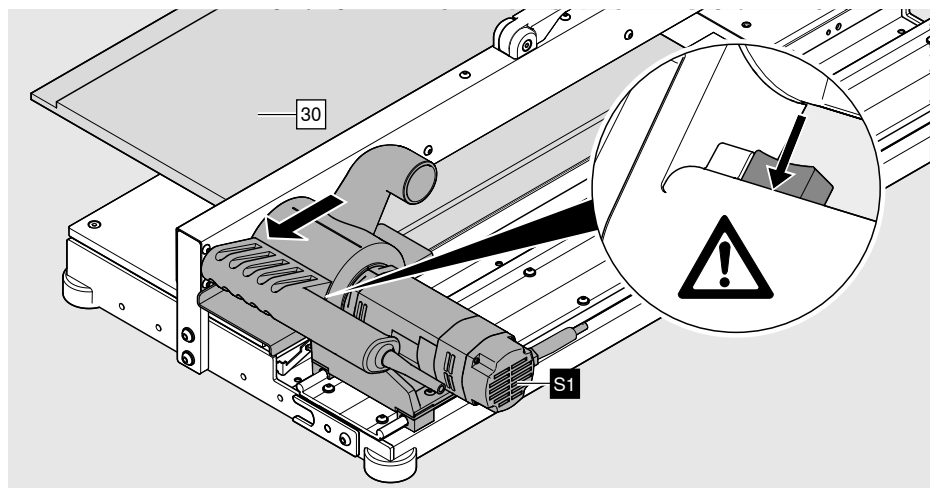

i NOTE

- Never turn off the motor during the milling and return process. This could damage the motor or the notch cutter [23].

- Return the slide [S1] to its starting position when the motor is switched on.
- Leave the rocker switch [20] in the starting position.

i NOTE

- When the rocker switch is released, the milling cutter continues to run for a time. Wait for the milling cutter to come to a standstill under all circumstances.


- For the second notch, repeat the work processes from 'Clamp workpiece'.
- Switch off extraction system.

Milling the back [31]

- Switch on the extraction system.

i NOTE

- The extraction system must always be switched on in order to remove wood chips and dust when milling.

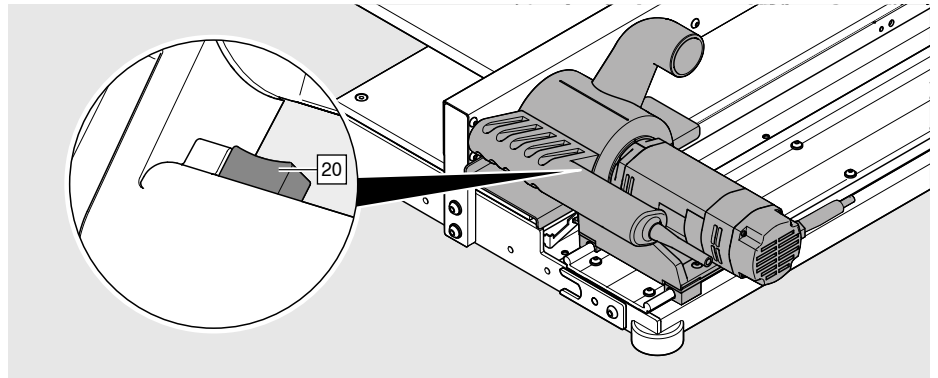

WARNING


Cutting tools can cause serious injury.

- No more than one person may use the base router at a time.
- Wear eye protection.
- Wear ear protection.


- Press the rocker switch [20].

i NOTE

- Always allow the motor to reach full speed.
- A cutter with sharp blades considerably relieves the load on the motor and therefore extends its service life.
- The feed rate affects the quality of the notch.
- In the event of overheating due to overload, the motor will be switched off by the temperature monitoring. After a cooling phase the motor can be operated again.

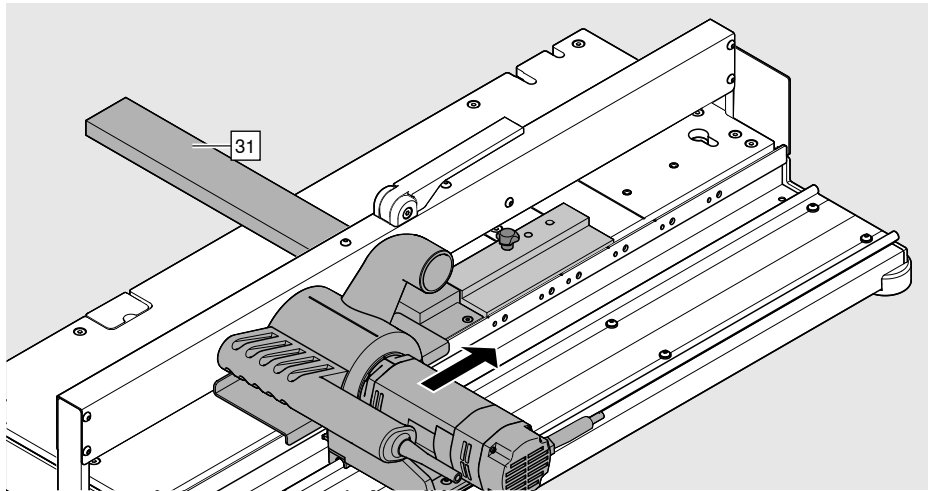

- Push the slide [S1] gently into the back [31].
- At the end of the back [31], gently draw the slide out from the material.

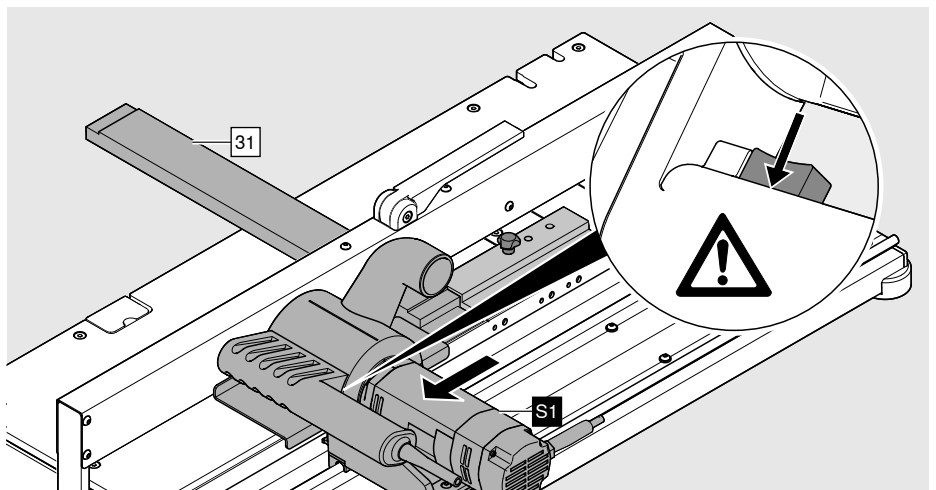

i NOTE

- Never turn off the motor during the milling and return process. This could damage the motor or the notch cutter [23].

- Return the slide [S1] to its starting position when the motor is switched on.
- Leave the rocker switch [20] in the starting position.

i NOTE

- When the rocker switch is released, the milling cutter continues to run for a time. Wait for the milling cutter to come to a standstill under all circumstances.

- For the second notch, repeat the work processes from 'Clamp workpiece'.
- Switch off extraction system.

I – Maintenance

Everyday cleaning



WARNING



Serious cuts.


Failure to heed this warning may result in personal injury.

- The base router must be disconnected from the power supply before cleaning and maintenance.



CAUTION

- Wear eye protection during cleaning work.

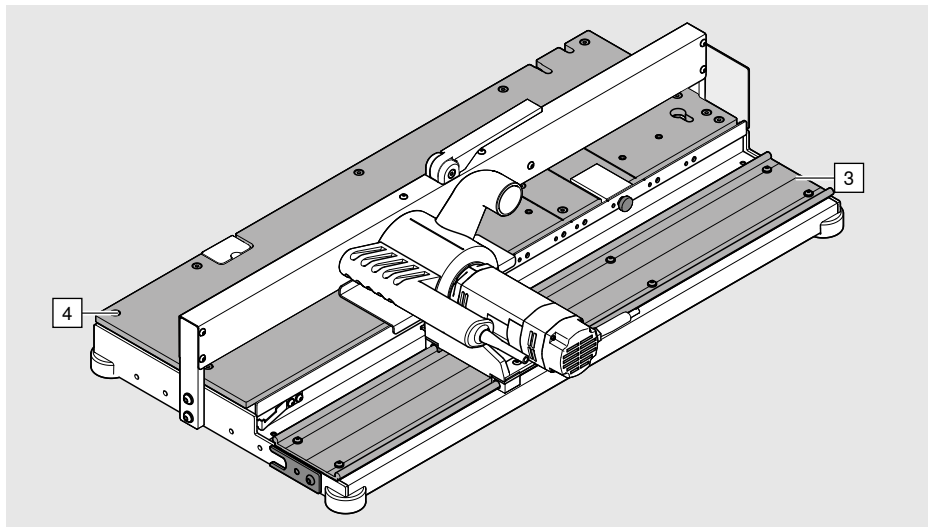

NOTE

- Do not use oil or lubricants during cleaning.
All runners and bearings are maintenance-free.
- Dust and wood chips must not be removed using sharp-edged or metallic objects.
- Never use compressed air near the motor.
Wood chips may infiltrate the motor through the ventilation slots, and therefore impair the motor's cooling system and service life.


- Keep the motor ventilation slots free of dust and wood chips.
- Clean the depth stop and lateral stop.
- Clean the runner [3] using a dry cloth.
- Clean the work top [4] using compressed air.

Removing the motor

If the motor needs to be removed for maintenance, cleaning or replacement purposes, proceed as follows:



WARNING



Serious cuts.


Failure to heed this warning may result in personal injury.

- The base router must be disconnected from the power supply before cleaning and maintenance.




NOTE


- Gloves must always be worn when cleaning the cutter [23].

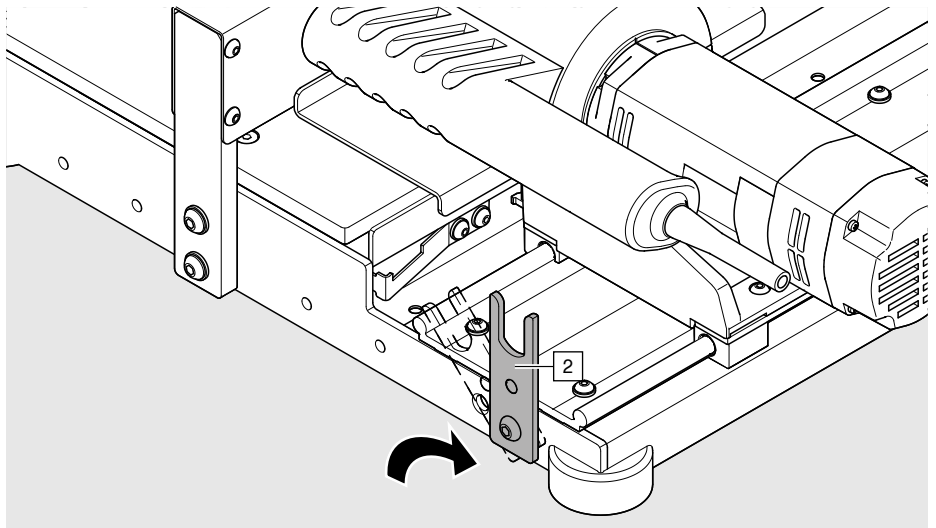

- Swivel the shaft holder [2] by 90 degrees.

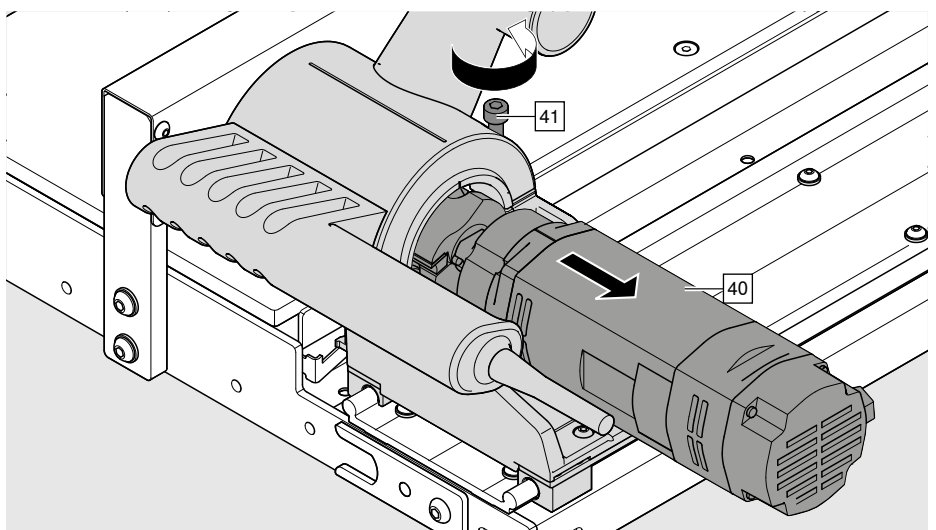


- Loosen the screw [41] with an SW 6 Allen key.
1/4 rotation – 90°
- Carefully remove the motor [40]. Damage to the cutting inserts is possible.

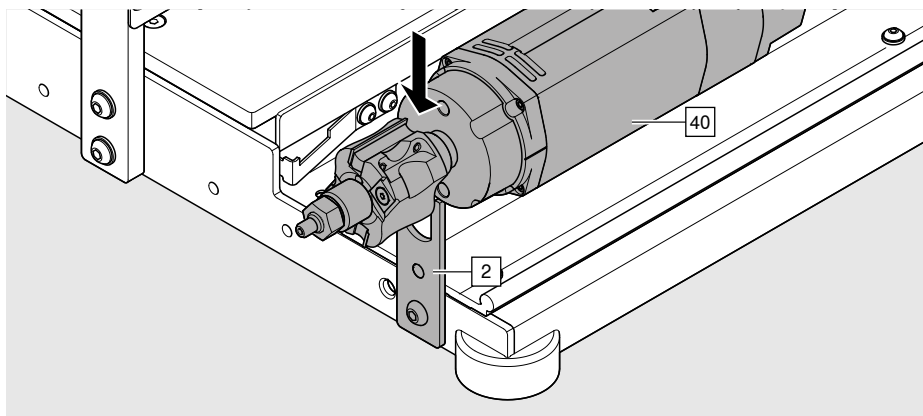


- Place the motor [40] in the shaft holder [2].

Installing the motor

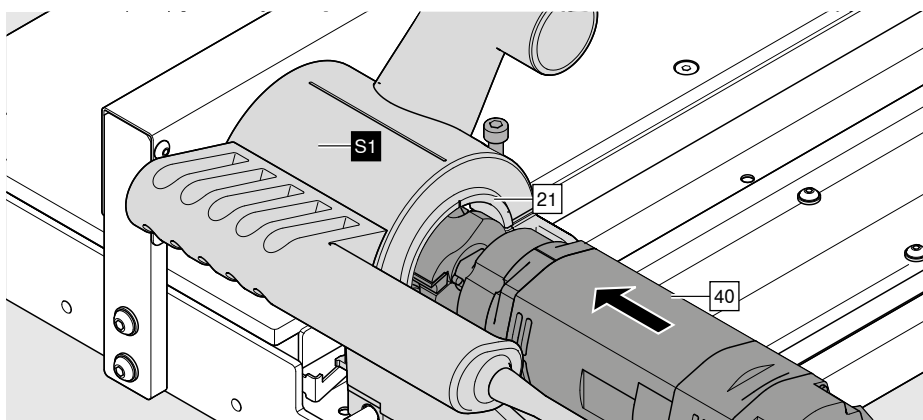

- All the fixing and clamping surfaces [21] on the slide [S1] and motor [40] must be free of dust and wood chips.
- Push the motor carefully on to the stop flange [21]. Damage to the cutting inserts is possible.

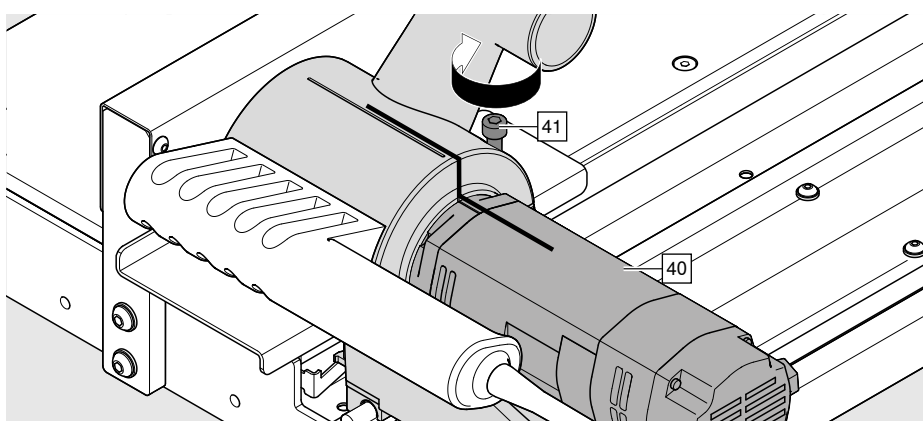

i NOTE


- Pay attention to the motor position. The motor's ventilation slot [40] must not be covered. Risk of overheating.

- Turn the motor [40] to the correct position.
- Tighten screw [41].

Cleaning the housing

If the housing [G] of the slide [S1] is filled with wood chips or if the cutter is blocked, proceed as follows:


Removing and installing the motor

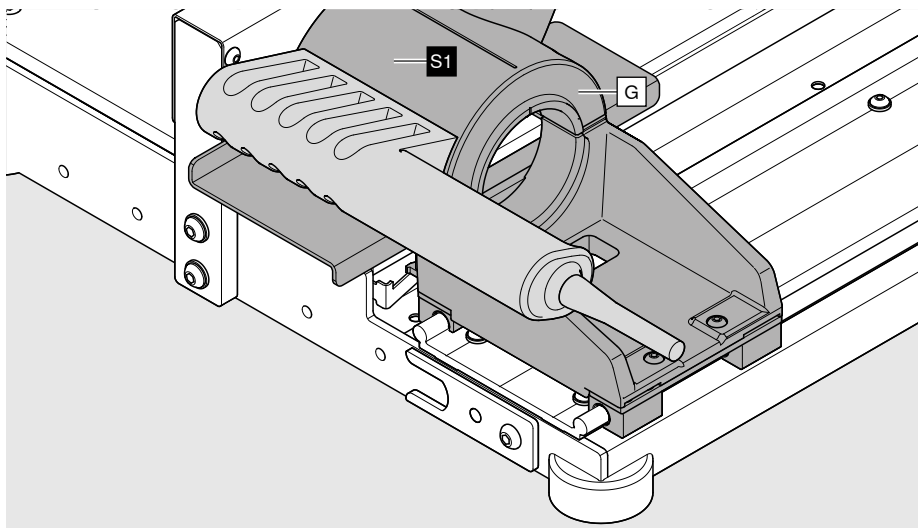

- Remove the wood chips from the housing [G].

Installing/removing the cutter

Removing and installing the motor

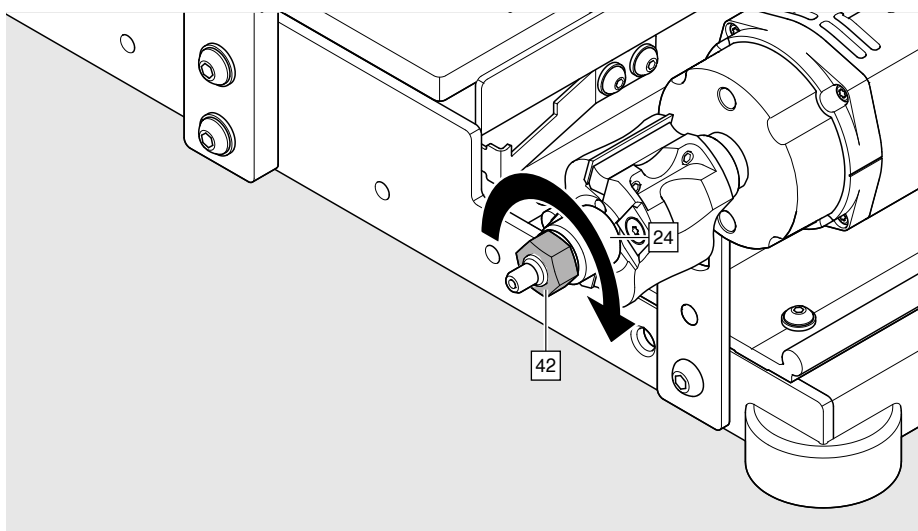


- Turn the nut [42] clockwise using the IM spanner.

i NOTE


- The thread on the motor shaft is a left hand thread.

**Retrofitting cutter DM 44 [14]
(optional accessory
Part number: M35.ZD19)**


Removing and installing the motor

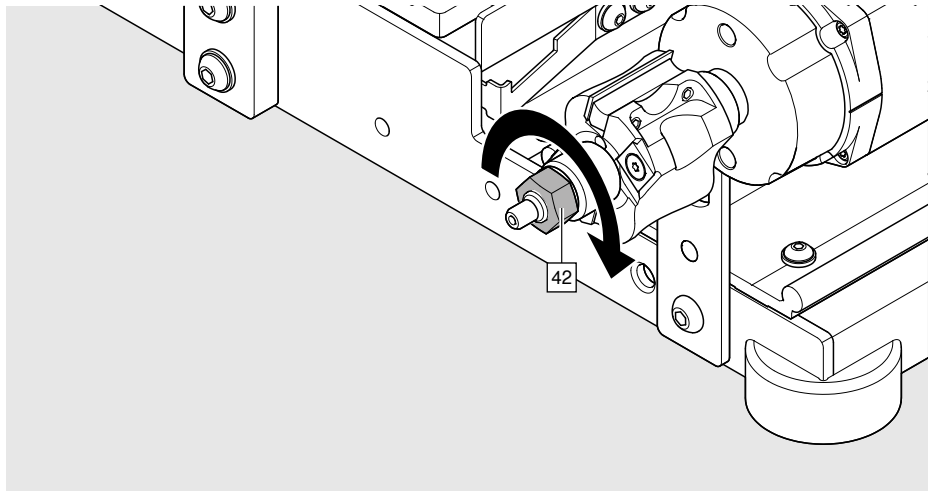

- Turn the nut [42] clockwise using the IM spanner.

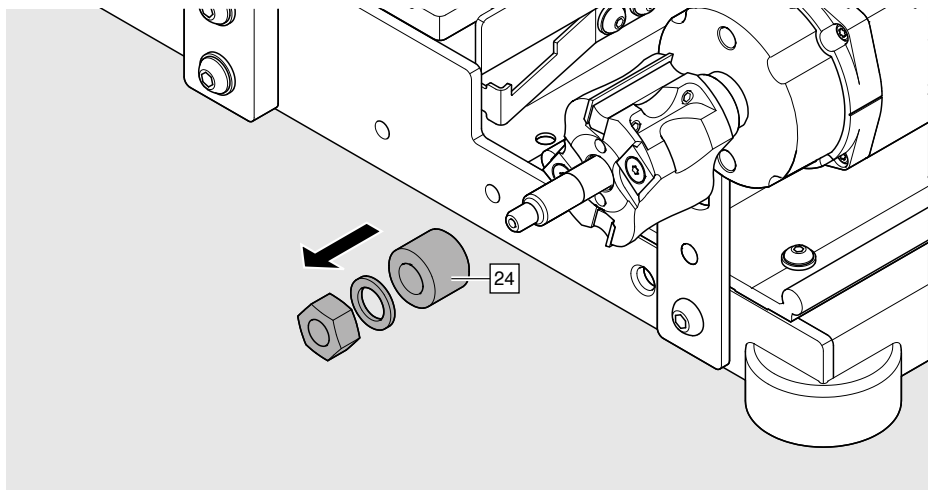

- Remove the spacer sleeve [24].

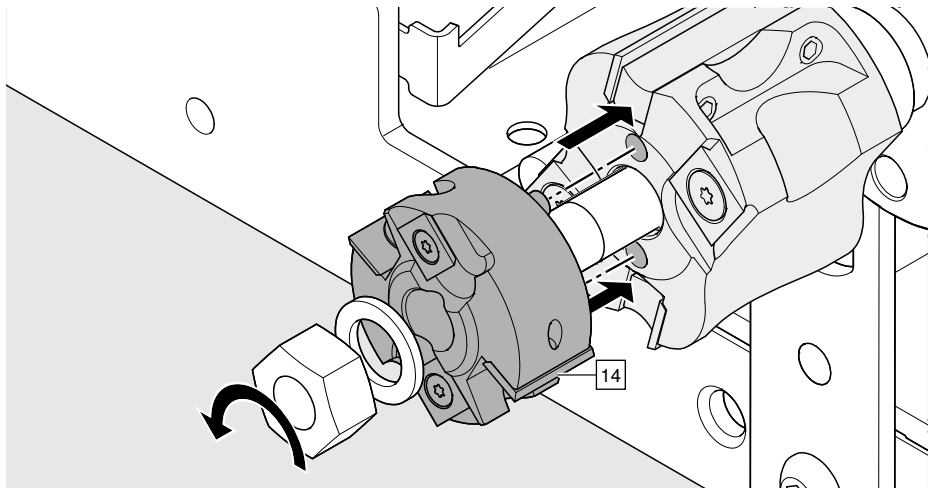


- Mount the cutter DM 44 [14].

Changing the cutting inserts

Removing and installing the motor



WARNING



Serious cuts.

Failure to heed this warning may result in personal injury.


- The base router must be disconnected from the power supply before cleaning and maintenance.
- Wear gloves.




NOTE

- The blades should be changed in the following sequence:
Whenever the pre-cutters [50] are turned for the second time, the cutting inserts [51] should also be turned. The pre-cutter [50] has the highest load.
- Sharp blades significantly extend the service life of the motor.
- For spare parts, see page 43.


Changing the pre-cutter [50].

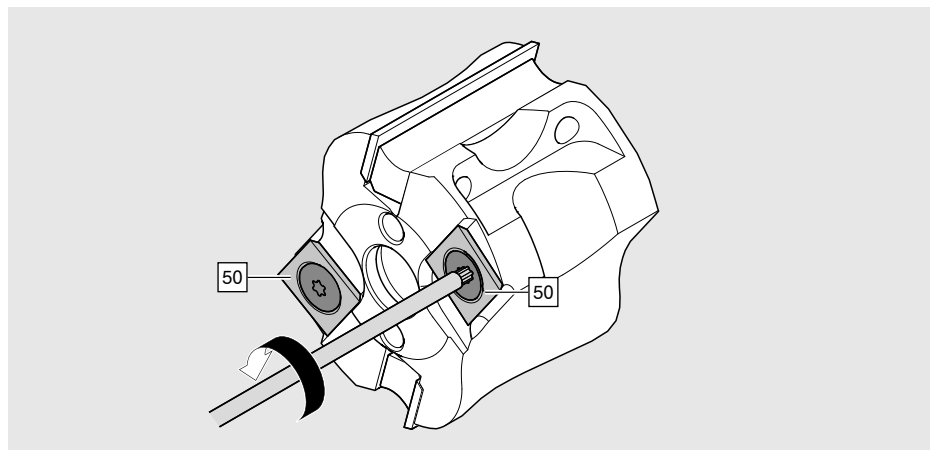


- Loosen the pre-cutter screw [50] by turning it anticlockwise.

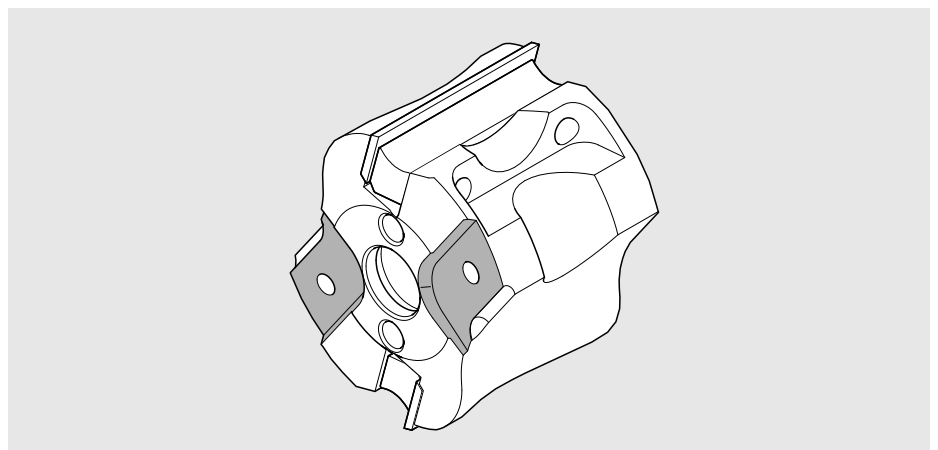

- Clean the base of the pre-cutter [50] using a dry cloth.




- Clean the pre-cutter [50] using a dry cloth.
- Turn the pre-cutter [50] 90 degrees.

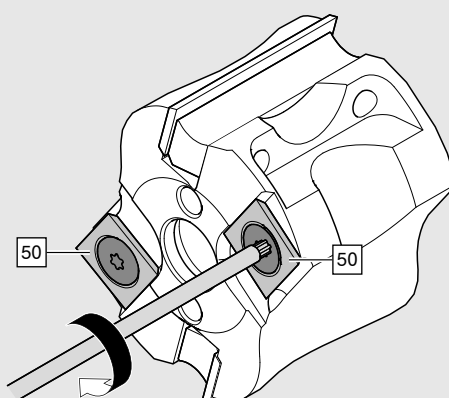


- Tighten the screw in the pre-cutter [50] by turning it clockwise.

i NOTE


- Only the TORX® key provided may be used.

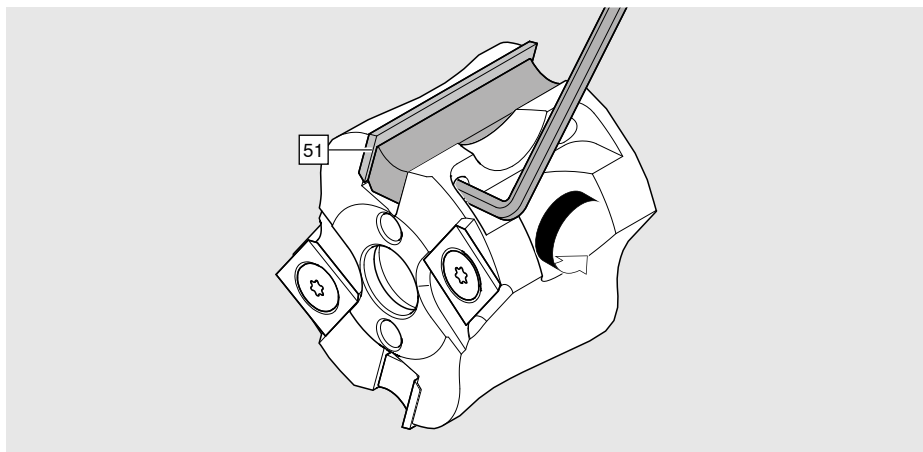


- Loosen the screw for the cutting insert [51] by turning it anticlockwise.

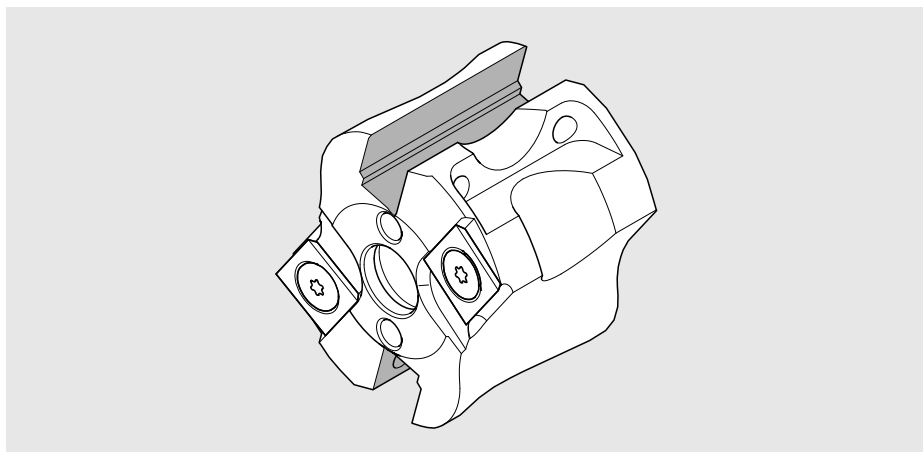


- Clean the base of the cutting inserts [51] using a dry cloth.

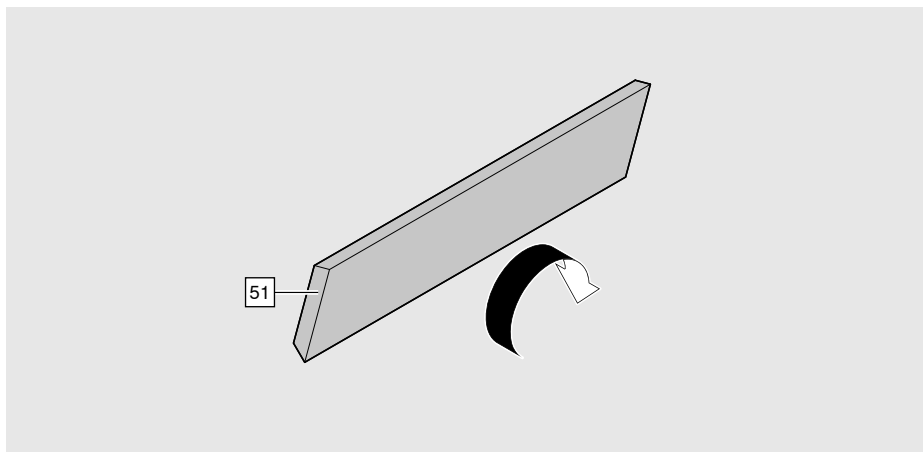

- Turn the cutting insert [51] 180 degrees.

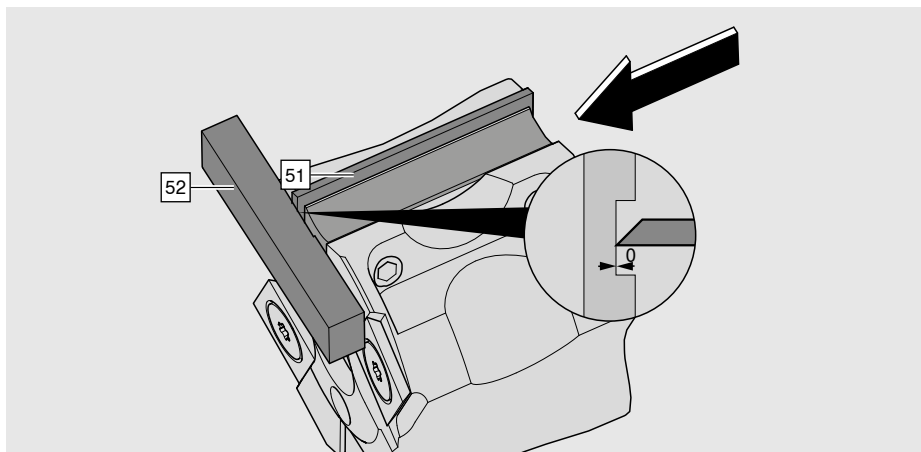

- Position the cutting insert [51] using the setting gauge [52].

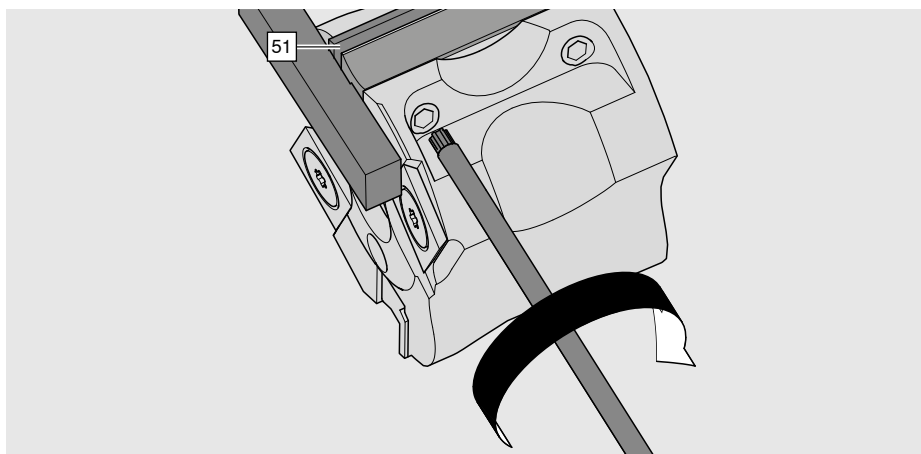

- Tighten the screw for the cutting insert [51] by turning it clockwise.

i NOTE

- Only the TORX® key provided may be used.

i NOTE


- After all four pre-cutter positions have become worn, the entire set consisting of pre-cutters [50] and cutting inserts [51] must be replaced.

J – Troubleshooting

Fault	Possible cause	Remedy
Incorrect notch dimensions	Workpiece not clamped correctly	➤ See page 26
	Dirty stops	➤ See page 33
	Dirty work top	➤ See page 33
	Workpiece is not flat against the support	➤ See page 25
	Cutter worn out	➤ See page 38
	Cutting inserts not correctly mounted	➤ See page 38
Notch edges are torn	Cutter worn out	➤ See page 38
	Rear stop missing, timber stop worn	➤ See page 25
	Feed too fast	➤ See page 29
Strong vibrations on base router	Base router not clamped	➤ See page 11
	Workpiece not clamped	➤ See page 26
Strong vibrations on the motor	Incorrect material	➤ See page 3
	Cutter not screwed tightly	➤ See page 36
	Motor in the slide not correctly clamped	➤ See page 35
	Cutting inserts not screwed tightly	➤ See page 38
	Not all the cutting inserts have been installed	➤ See page 38
	Damaged cutting inserts	➤ See page 38
Motor overheated	Feed too fast	➤ See page 29
	Cutter worn out	➤ See page 38
	Motor ventilation slots are blocked	➤ See page 33
	Carbon brush worn	➤ See MA-709
Motor temporarily cuts out	Overheating due to overloading	➤ See page 29
	Carbon brush worn	➤ Spare part M35.ZM01

K - Spare parts

When ordering spare parts, state the year of construction and serial number.

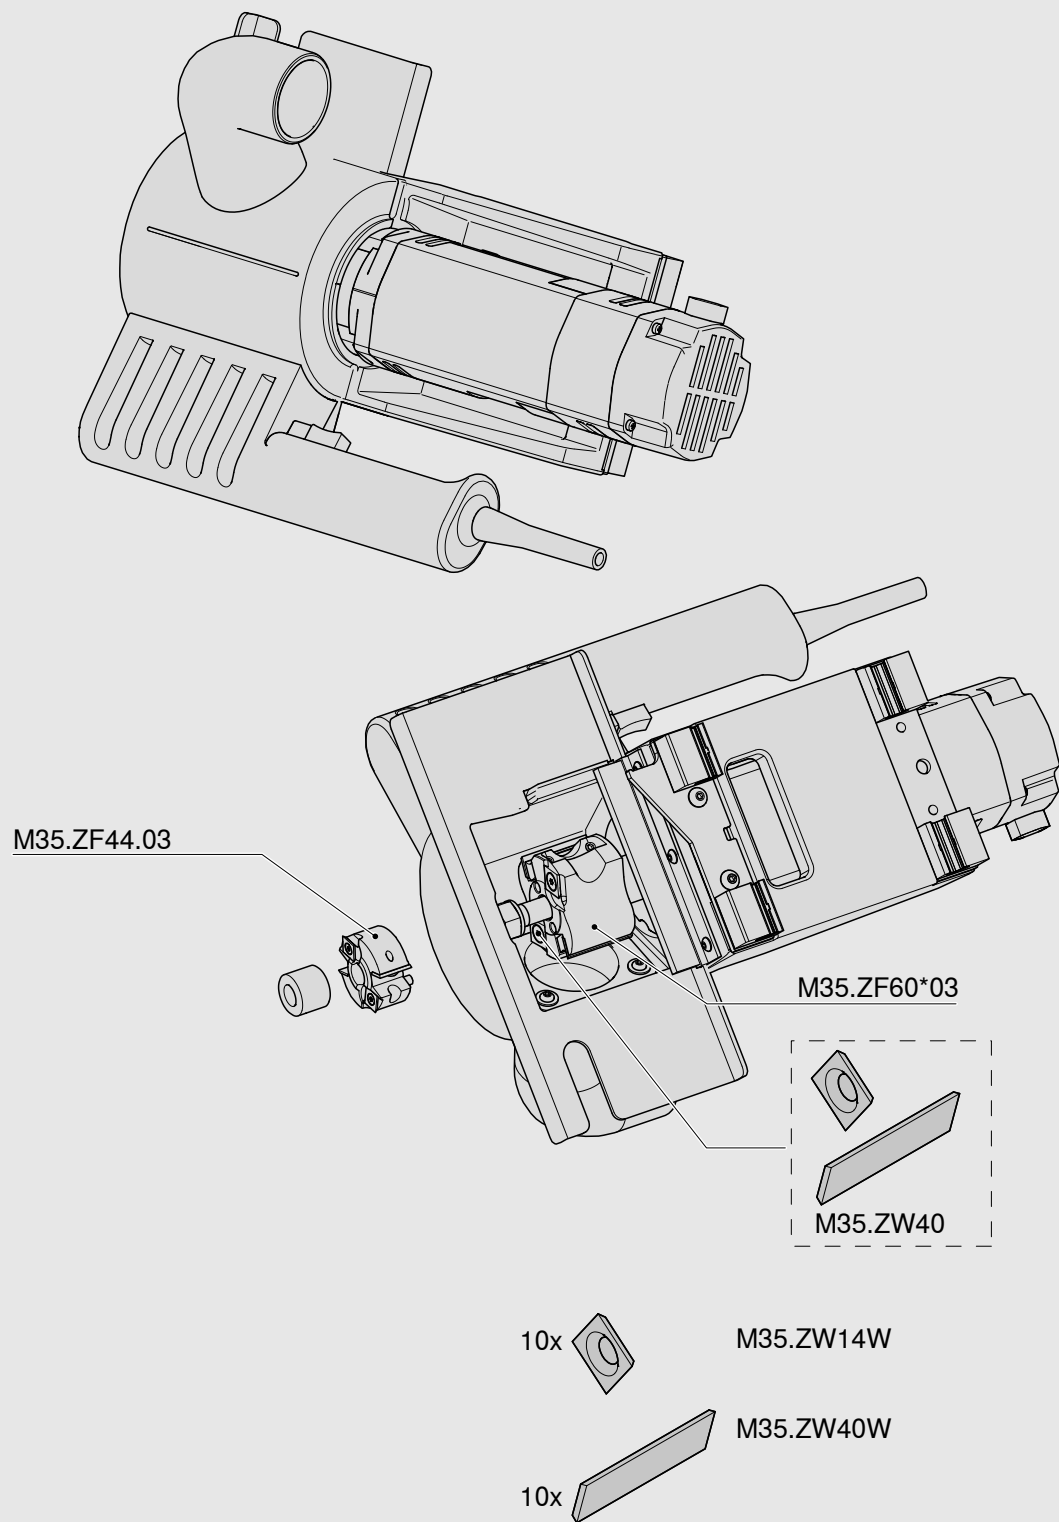

L – Scope of delivery

Base router	M35.7200.XX
Cutter	M35.ZF0-60.03 FRAE-KO
Extraction socket	M51N0603 TRI+ZUT
Spanner 19	
Allen key 6	

Disposal

- Dispose of all mechanical components of the base router in accordance with local regulations.
- Dispose of all electrical components of the base router in a separate collection for electrical and electronic appliances as per local regulations.

M – EC Declaration of Conformity

We, Julius Blum GmbH, Industriestrasse 1, A-6973 Höchst, Austria, take full responsibility in declaring that the product, base router M35.7200.xx, to which this declaration refers, complies with the following EU directives:

EC Machine Directive	2006/42/EC
EC EMC Directive	2004/108/EC
EC RoHS Directive	2011/65/EC

Höchst, 27/08/2014

Documentation authorised agent:

Hermann Weissenhorn Thomas Maier

Manager, Technology

www.blum.com

www.blum.com

Technical data

Only use in dry, enclosed rooms.

Dimensions/weight:

Height: _____ 250 mm
 Width: _____ 580 mm
 Depth: _____ 990 mm
 Weight: _____ 29 kg

Energy:

Voltage: _____ 1x 230–240 V 50–60 Hz
 Power: _____ 1050 W

Sound:

Emission – Sound pressure level (LAeq): _____ 92 dB(A)
 Sound power level tolerance measurement uncertainty: _____ +/- 4 dB(A)



Temperature:

Operation: _____ 5–40 °C
 Storage: _____ -20–70 °C

Workpiece:

Nominal length of drawer base: _____ 270–650 mm
 Cabinet width: _____ 275–1200 mm
 Panel thickness: _____ 15–19 mm

Serial tag

	
Ser.No.: <input type="text"/>	
29 kg / 63.9 lbs	
Bodenfalzgerät	
Ref.No.: <input type="text"/>	
Julius Blum GmbH - A - 6973 Industriestrasse 1	

Device type: Base router

Panel thickness limitations >16 mm–19 mm

For TANDEMBOX and LEGRABOX, Blum recommends using a panel thickness of 16 mm for back and base. The following limitations are to be taken into account when using thicker panel material (up to 19 mm).

LEGRABOX limitations:

Back with >16 to 19 mm

- With SERVO-DRIVE, the drilling positions and space requirement have to be adjusted.

Base with >16 to 19 mm

- Use of steel back only possible with additional notch at rear of drawer base.
- Use of front piece only possible with additional notch at front of drawer base.
- Use of side stabiliser only possible in combination with steel back.
- TIP-ON synchronisation can only be used with a panel width of up to 18 mm.
- With the front stabiliser, the drilling position and space requirement beneath need to be considered.
- LEGRAPRESS cannot be used.
- Base/back drilling template (ZML.7000) cannot be used.

TANDEMBOX limitations:

Back with >16 to 19 mm

- With SERVO-DRIVE, the drilling positions and space requirement have to be adjusted.
- The side stabiliser installed at the rear cannot be used. (Side stabiliser installed at the top possible.)

Base with >16 to 19 mm

- Use of steel back only possible with additional notch at rear of drawer base.
- Use of front piece only possible with additional notch at front of drawer base.
- TIP-ON is not possible.
- Sink pull-out: notch for sink drawer side also necessary.
- With the front stabiliser, the drilling position and space requirement beneath need to be considered.

Notes

Blum partners worldwide can be found at:
www.blum.com/addresses

BAU0083616248 · IDX: 00 · IDNR: 566.730.8 · BA-180/0EN · 12.17 · Copyright Blum

Julius Blum GmbH
Beschlägefabrik
6973 Höchst, Austria
Tel.: +43 5578 705-0
Fax: +43 5578 705-44
E-Mail: info@blum.com
www.blum.com

